


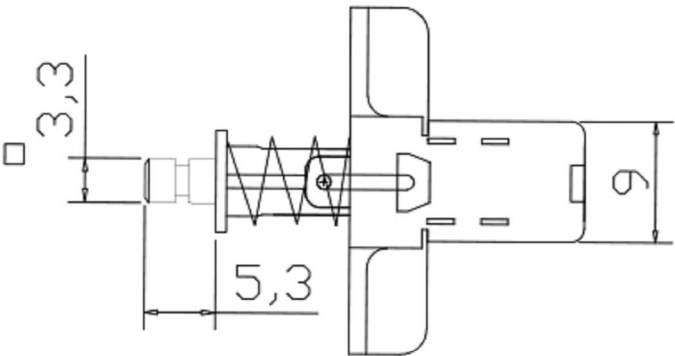
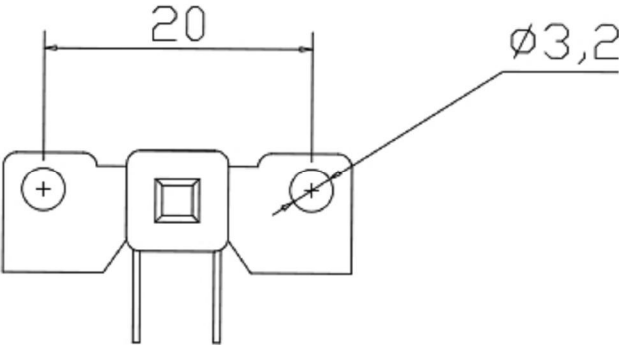


ROHS

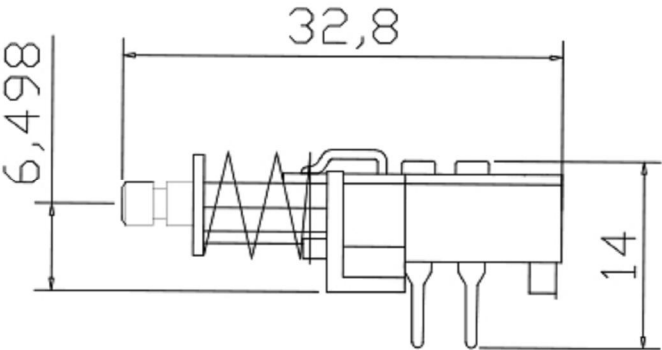

PCB LAYOUT



SCHEMATIC

型号	间距	针座高度			
直键开关二档互锁	20(间距)	T14平针	T18中针	T21产品针	T25长中针
直键开关三档互锁					
直键开关四档互锁					
直键开关五档互锁					
直键开关六档互锁					
直键开关七档互锁					
直键开关八档互锁					

以上规格可以按客户需求订做
自锁、无锁、互锁、带按键帽、铁架间距

ITEM: PERFORMANCE
Title: PUSH BUTTOMN SWITCH
Model: XB-PBS-21H18A
Rating: 0.3A 0.5A 12V 30V DC
Function: 2P2T
Timing:Non-shorting
ContactResistance(mohms):50mΩ max
Insulation Resistanc(Mohms):100MΩ min at 500V DC
Dielectric Strength(V):AC 500V for 1 min
LifeTest:10,000 Cycles

 XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD TITLE : XB PUHS BUTTON SWITCH MODEL : XB-PBS-21H18A 按键开关四脚带耳 ± 2°					
	UNIT : MM	DWN.	ZENQ. CHEN	DATE	2024-05-08
	SCALE : 3 : 1	CHK'D	PANG. DONG	DATE	2024-05-08
VERSION	01	APPD.	FEI. LONG. HE	DATE	2024-05-08
		TOLERANCE		ANGLE	
		<=1.5mm ± 0.1		± 2°	
		>1.5mm ± 0.2			
		>=10mm ± 0.3			
NO.	PART NAME	MATERIAL	QTY.	FINISHING	
8	CONTACT CLIP	PBS STRIP	2	Ag CLAD	
7	RING	IRON STRIP	1	Zn PLATED	
6	SPRING	SUS	1	NATURE	
5	SLEEVE	POM	1	GRAY	
4	CASE	NYLON	1	GRAY	
3	COVER	PBT	1	GRAY	
2	TERMINAL	BRASS STRIP	6	Ag PLATED	
1	KNOB	POM	1	YELLOW	