

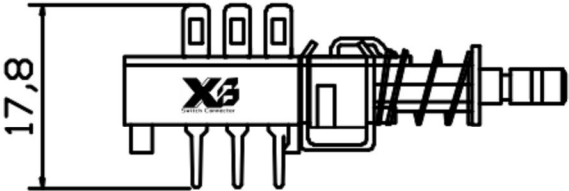


ROHS

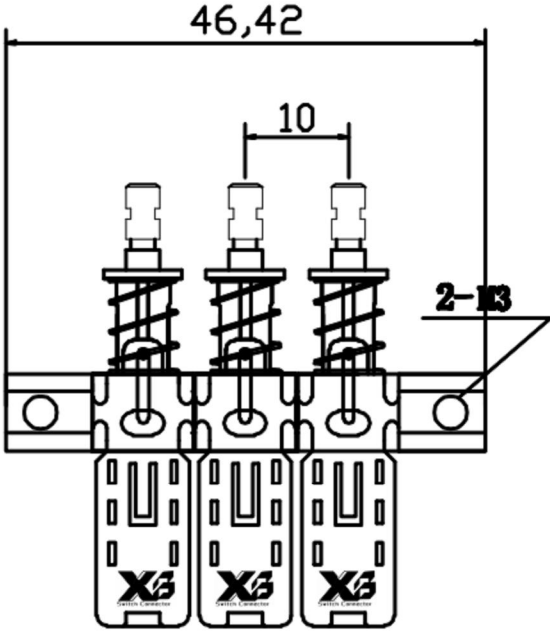


Key NO 1-3



SCHEMATIC

NO	3	2	1
----	---	---	---

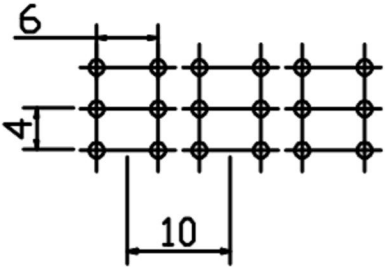

PCB LAYOUT

- 1

KEY(开关) NO 1-3 Circul (型号) 2C-2P(6P)
travel lock 3.5mm
fuli 4.8mm
- 2

Key NO 1-3 Inter lock(互锁)
- 3

Key NO 1-3 pitch(间距) 10mm
- 4

铁架4按装孔是2- Ø.2
- 5

Termnal style

ITEM: PERFORMANCE
Title: PUSH BUTTOMN SWICH
Model: XB-PBS-2H3-15
Rating: 0.3A 0.5A 12V 30V DC
Function: 2P2T 按键开关联动式 三联按钮开关
Timing:Non-shorting
ContactResistance(mohms):50mΩ max
Insulation Resistanc(Mohms):100MΩ min at 500V DC
Dielectric Strength(V):AC 500V for 1 min
LifeTest:10,000 Cycles

X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD		TITLE : XB PUHS BUTTON SWITCH						8CONTACT CLIPPBS STRIP2Ag CLAD				
		MODEL : XB-PBS-2H3-15 三联开关 互动按键开关						7RINGIRON STRIP1Zn PLATED				
								6SPRINGSUS1NATURE				
UNIT : MM		DWN.	ZENQ. CHEN	DATE	2024-05-08	TOLERANCE		ANGLE		5SLEEVEPOM1GRAY		
SCALE : 3 : 1		CHK'D	PANG. DONG	DATE	2024-05-08	<=1.5mm ± 0.1 >1.5mm ± 0.2 >=10mm ± 0.3		± 2°		4CASENYLON1GRAY		
VERSION		01	APPD.	FEI. LONG. HE	DATE	2024-05-08					3COVERPBT1GRAY	
											2TERMINALBRASS STRIP6Ag PLATED	
											1KNOBPOM1YELLOW	
											NO. PART NAMEMATERIALQTY. FINISHING	