

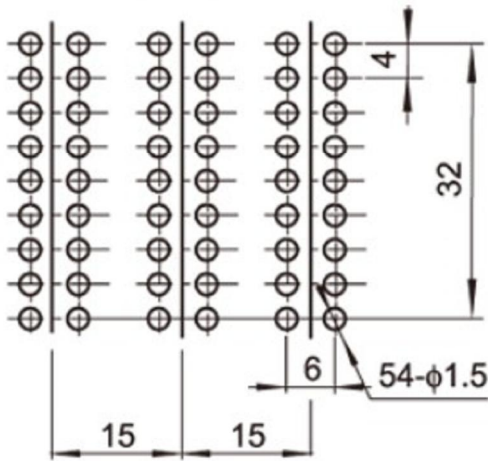
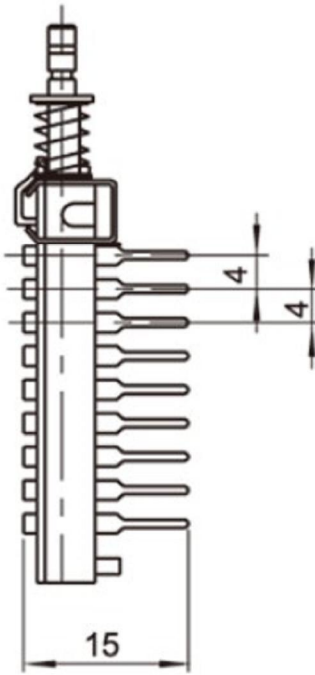
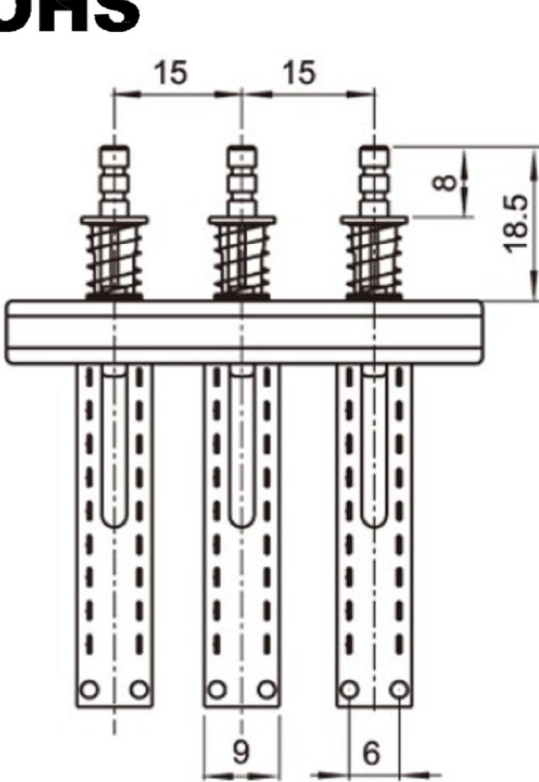


ROHS

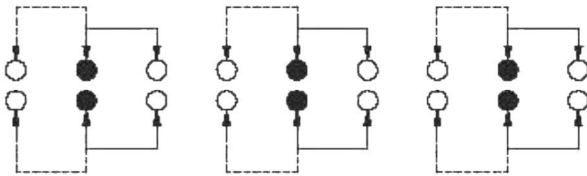

PCB LAYOUT

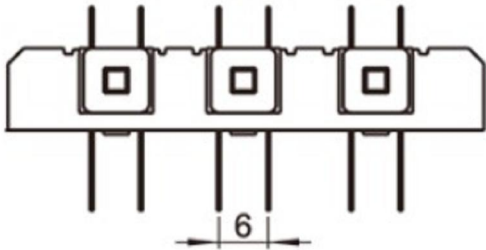

SCHEMATIC

ITEM: PERFORMANCE
Title: PUSH BUTTOMN SWICH
Model: XB-PBS-6H3-15
Rating: 0.3A 0.5A 12V 30V DC
Function: 6P2T 直键开关三联互动
Timing:Non-shorting
ContactResistance(mohms):50mΩ max
Insulation Resistanc(Mohms):100MΩ min at 500V DC
Dielectric Strength(V):AC 500V for 1 min
LifeTest:10,000 Cycles

XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD		TITLE : XB PUHS BUTTON SWITCH						8		CONTACT CLIP	PBS STRIP	2	Ag CLAD
		MODEL : XB-PBS-6H3-15 三联琴键开关双排18脚						7		RING	IRON STRIP	1	Zn PLATED
								6		SPRING	SUS	1	NATURE
UNIT : MM		DWN.	ZENQ. CHEN	DATE	2024-05-08	TOLERANCE <=1.5mm ± 0.1 >1.5mm ± 0.2 >=10mm ± 0.3	ANGLE ± 2°	5		SLEEVE	POM	1	GRAY
SCALE : 3 : 1		CHK'D	PANG. DONG	DATE	2024-05-08			4		CASE	NYLON	1	GRAY
VERSION		01	APPD.	FEI. LONG. HE	DATE	2024-05-08		3		COVER	PBT	1	GRAY
								2		TERMINAL	BRASS STRIP	6	Ag PLATED
								1		KNOB	POM	1	YELLOW
								NO.		PART NAME	MATERIAL	QTY.	FINISHING