

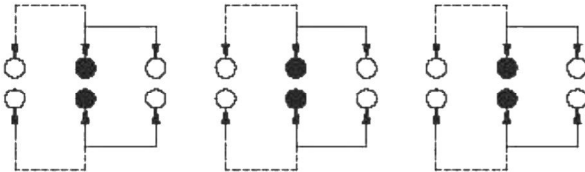
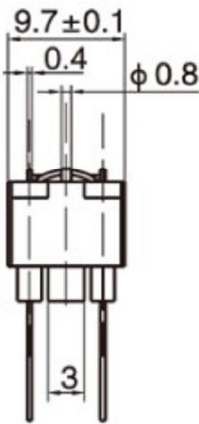
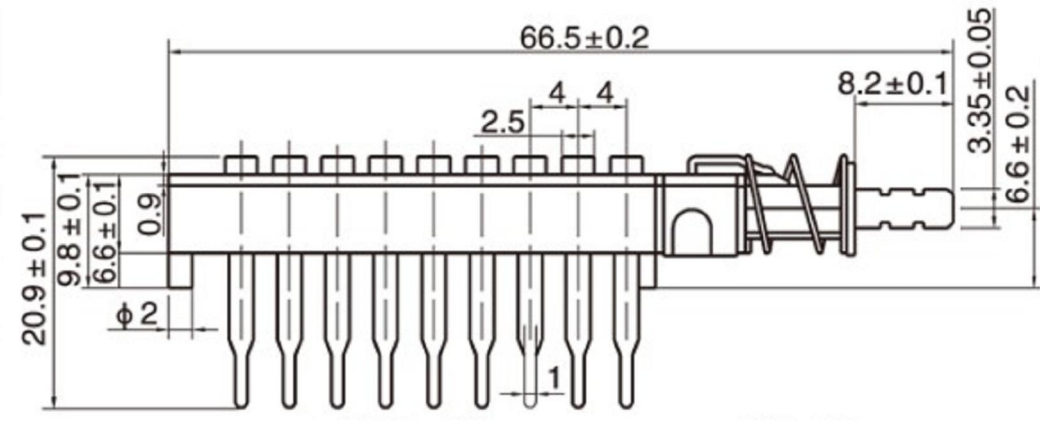


ROHS

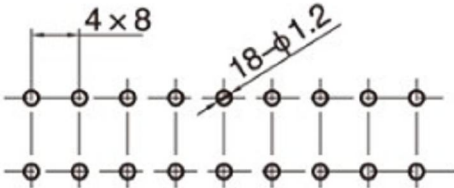

SCHEMATIC

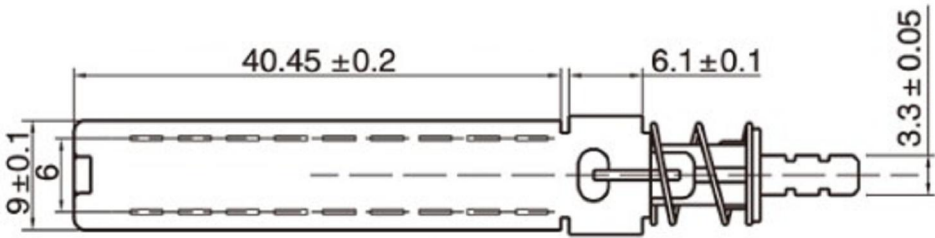

PCB LAYOUT

ITEM: PERFORMANCE
Title: PUSH BUTTOMN SWICH
Model: XB-PBS-Z6-3
Rating: 0.3A 0.5A 12V 30V DC
Function: 6P2T
Timing:Non-shorting
ContactResistance(mohms):50mΩ max
Insulation Resistanc(Mohms):100MΩ min at 500V DC
Dielectric Strength(V):AC 500V for 1 min
LifeTest:10,000 Cycles

XB Switch Connector		东莞市溪榜电子有限公司										
		DONG GUAN XI BANG ELECTRONICS CO., LTD										
		TITLE : XB PUHS BUTTON SWITCH										
MODEL : XB-PBS-Z6-3 自锁开关侧接6路2组 加长脚18P												
UNIT : MM		DWN.	ZENQ. CHEN	DATE	2024-05-08	TOLERANCE ≤1.5mm ± 0.1 ＞1.5mm ± 0.2 ≥10mm ± 0.3	ANGLE ± 2°	8	CONTACT CLIP	PBS STRIP	2	Ag CLAD
SCALE : 3 : 1		CHK'D	PANG. DONG	DATE	2024-05-08			7	RING	IRON STRIP	1	Zn PLATED
VERSION		01	APPD.	FEI. LONG. HE	DATE			2024-05-08	6	SPRING	SUS	1
								5	SLEEVE	POM	1	GRAY
								4	CASE	NYLON	1	GRAY
								3	COVER	PBT	1	GRAY
								2	TERMINAL	BRASS STRIP	6	Ag PLATED
								1	KNOB	POM	1	YELLOW
								NO.	PART NAME	MATERIAL	QTY.	FINISHING