
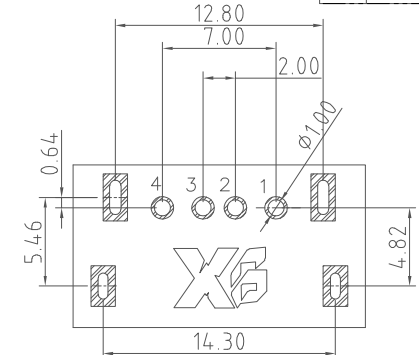
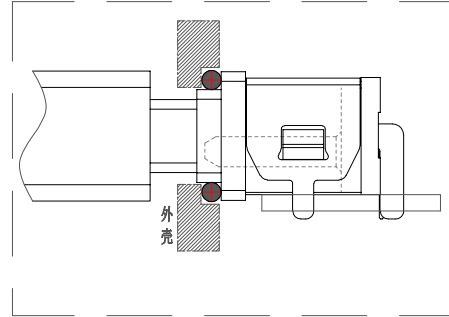


CAD GENERATED DRAWING. DON'T CHANGE BY HAND.




REV.	ECN. NO.	APPD.



RECOMMENDED PCB LAYOUT(TOP VIEW)
DEFAULT TOLERANCE+/-0.05
THICKNESS T=1.6mm

PIN ASSIGNMENT

PIN NO.	1	2	3	4
SIGNAL NAME	VBUS	D-	D+	GND

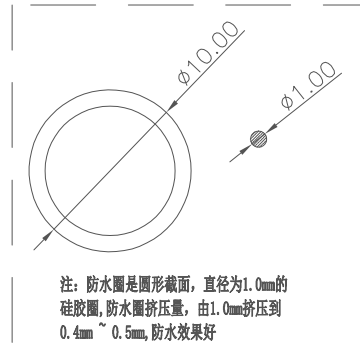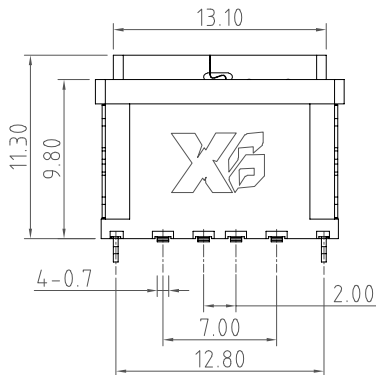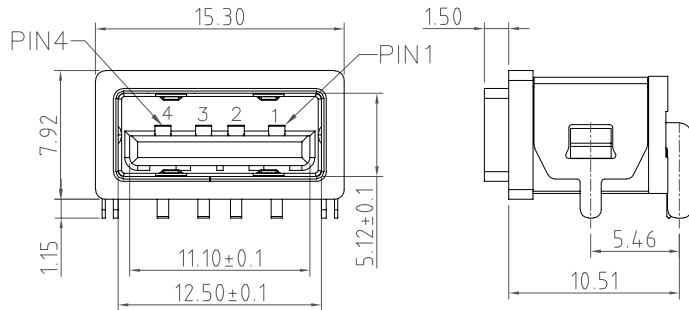

注：防水圈是圆形截面，直径为1.0mm的
硅胶圈，防水圈挤压力，由1.0mm挤压到
0.4mm ~ 0.5mm，防水效果好

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE :8N~35N
7. UNMATING FORCE: 8N~35N
8. DURABILITY:1500 CYCLES

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	

X. ±0.50	X* ± 2°	UNITS	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.	
.X ±0.30	.X* ± 1°	mm		
.XX ±0.10	.XX* ± 0.5°	MAT'L	PART NO. XB-USB-A-1195	TITLE: IP68 USB 2.0 A TYPE
.XXX ± 0.05		FINISH	APPD: GAO PENG	DWG NO: XB-USB-A-1195
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF .XI BANG ELECTRONIC TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF .XI BANG ELECTRONIC TECHNOLOGY CO.,LTD			CHKD: HE LONGFEI	 SCALE SHEET REV. 1/1 1/2 A2
			Q'TY DR: PANG DONG	