

REV.	ZONE	DESCRIPTION	DESIGN	DATE
B				

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectric Withstanding Voitage:
500 V AC AT Sea Levol
5. 绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:



1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retenion
1.2kgf (MIN)

原材料:Matorial:



1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
U1 94V-0 PBT White/Black
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy C2680/SPCC


电镀:Finish:

1. 端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

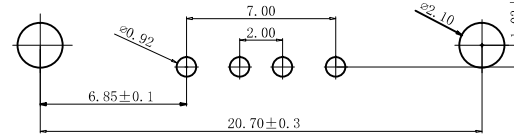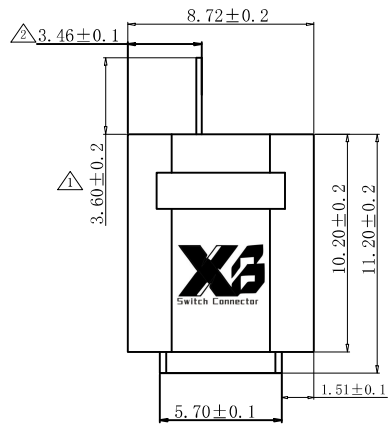

RECOMMENDED PCB LAYOUT

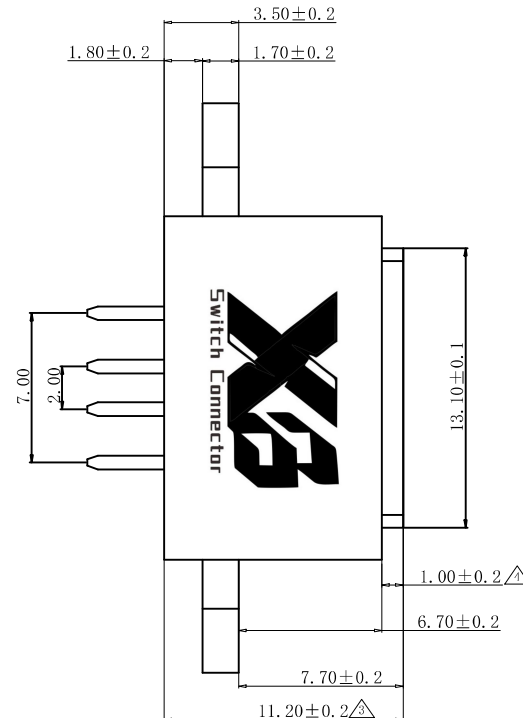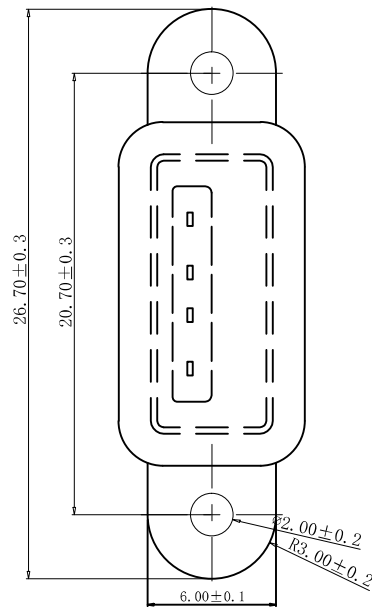

X. ±0.50	X* ±2°	UNITS	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD		
.X ±0.30	.X* ±1°	mm			
.XX ±0.10	.XX* ±0.5°	MAT'L	TITLE: XB-USB-AF-180-E		
.XXX ±0.05			USB 2.0 4PIN 180度插板DIP防水母座 带双耳 H=11.2MM		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XI BANG ELECTRONIC TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XI BANG ELECTRONIC TECHNOLOGY CO., LTD		FINISH	APPD: GAO. PENG	DWG NO.: XB-USB-AF-180-E	
			CHKD: HE. LONG. FEI		
		Q'TY	DR: PANG. DONG	 SCALE/SHEET/REV. 1/1 1/1 A1	