





RoHS Compliant

CUSTOMER DRAWING

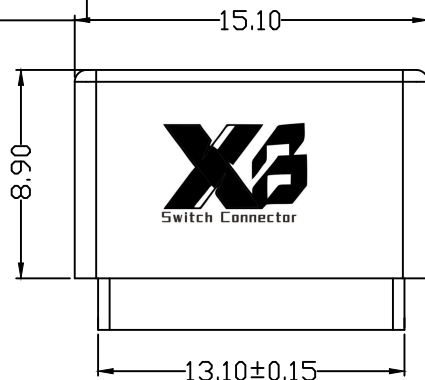

防水塑胶PC

D款, 反向10.0四脚, DIP-\*6.20

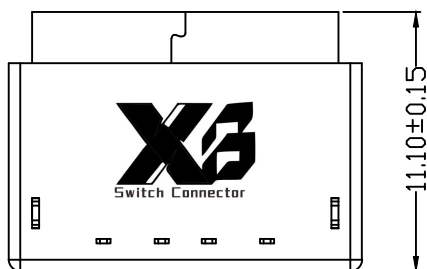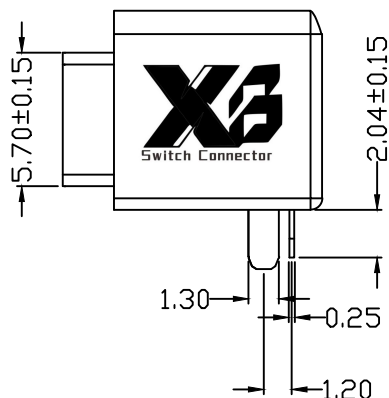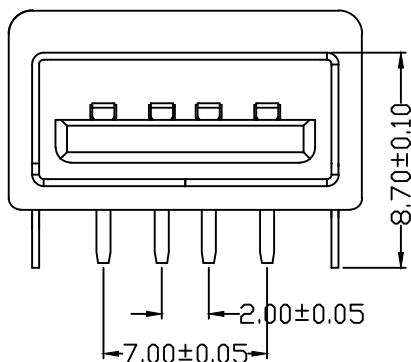

NOTES:

1.HOUSING: SEE NOTES, UL94V-0.

TERMINAL: SEE NOTES.

SHELL: SEE NOTES.

SPECIFICATION:

1.ELECTRICAL CHARACTERISTIC:

CONTACT RESISTANCE: 30MΩ MAX

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN

INSULATION RESISTANCE: 1000MΩ MIN

2.MECHANICAL CHARACTERISTIC:

INSERTION FORCE: 35N(3.57KGF) MAX

EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN

DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N

5000 CYCLES MIN

5000 CYCLES EXTRACTION FORCE:3~35N

3.ENVIRONMENTAL:

OPERATING TEMPERATURE: -55℃+85℃

4.Contact finish:


01:Selective Gold Flash

02:Selective Gold 3U"

03:Selective Gold 5U"

04:Selective Gold 15U"

05:Selective Gold 30U"

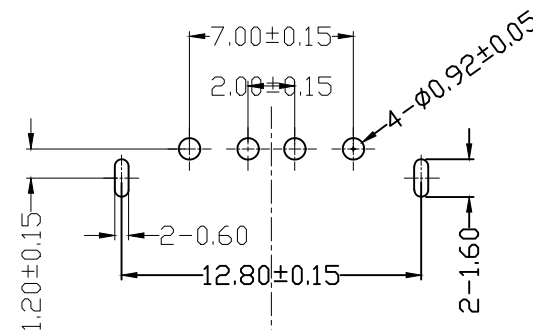

FRONT EDGE OF CONNECTOR  
PCB LAYOUT (T=1.60mm)

TOLERANCES UNLESS  
OTHERWISE SPECIFIED

X. ±0.30  
X.X ±0.20  
X.XX ±0.15  
X.XXX ±0.05  
ANGEL ±1°

MATERIAL:

FINISH:



东莞市溪榜电子有限公司  
DONG GUAN XI BANG ELECTRONICS CO., LTD

DESIGN: GAO, PENG

DATE:

CHECKED: HE, LONG, FEI

DATE:

APPROVED: PANG, DONG

TITLE:

USB A/F 反向10.0 D款后两脚DIP 6.20防水成品图

PART NO:  
XB-USB-AF-90W

SCALE: 1:1  
UNIT: mm  
SIZE: A4

DWG NO:

SHEET: 1/1  
REV: A

|         |     |          |             |         |          |
|---------|-----|----------|-------------|---------|----------|
|         | A   | 10.08.16 | RELEASE     | JAMES   |          |
| ECN. NO | REV | DATE     | DESCRIPTION | CHANGED | APPROVED |