

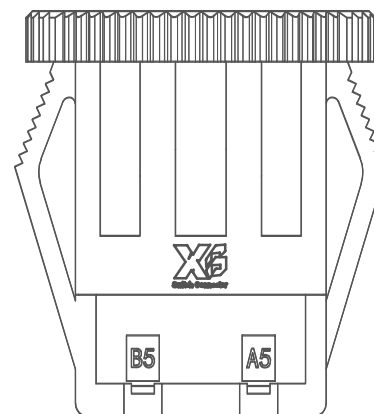
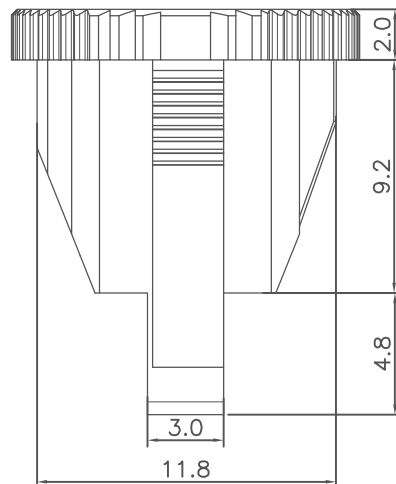



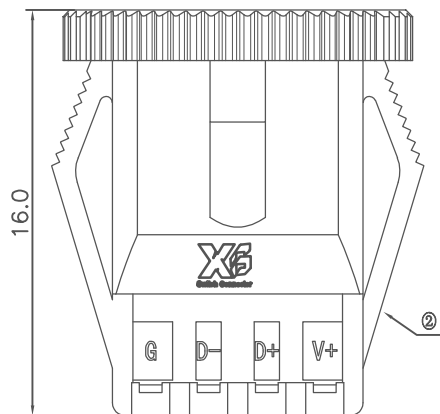


技术要求

1. 插入力: 5-20N(0.5-2.0kgf)
2. 拔出力: 8-20N(0.8-2.0kgf)
3. 接触电阻: 40mΩ MAX
4. 绝缘电阻: 100MΩ MIN
5. 耐电压: AC 100V 1min 无飞弧及击穿
6. 寿命: 5000 10-20次/min
7. 额定负载: DC 12V 0.5-5A
8. 适用温度范围: -25-85° C

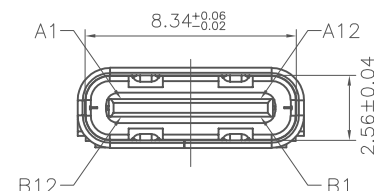

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXM1	B10	SSRXM1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXM2	B3	SSTXM2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

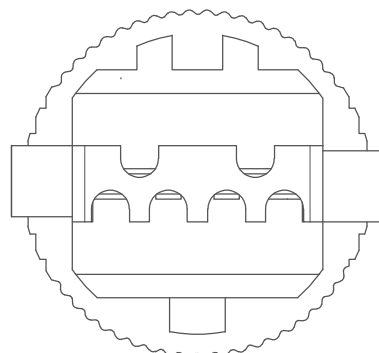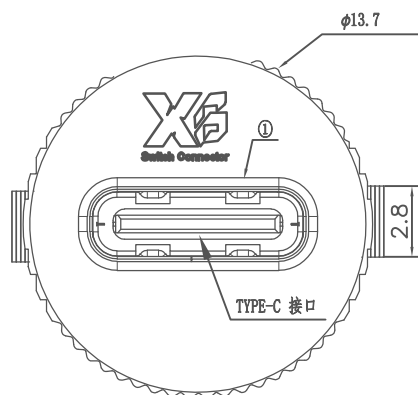

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TYPE-C 防水USB母座连接器

设计 高鹏

公差值

品名规格

XB-USB-FS-Y-K06PX-T

审核 贺飞

XX ±0.30 X' ±10°

图纸类型

成品图

比例 1:1

核准 陈

.XX ±0.20 X' ±8°

视图

版本 A/0

单位 MM

XXX ±0.10 XX' ±5°

UNIT

图例

图例

图例

1

2

3

4

5

6

7

8

