


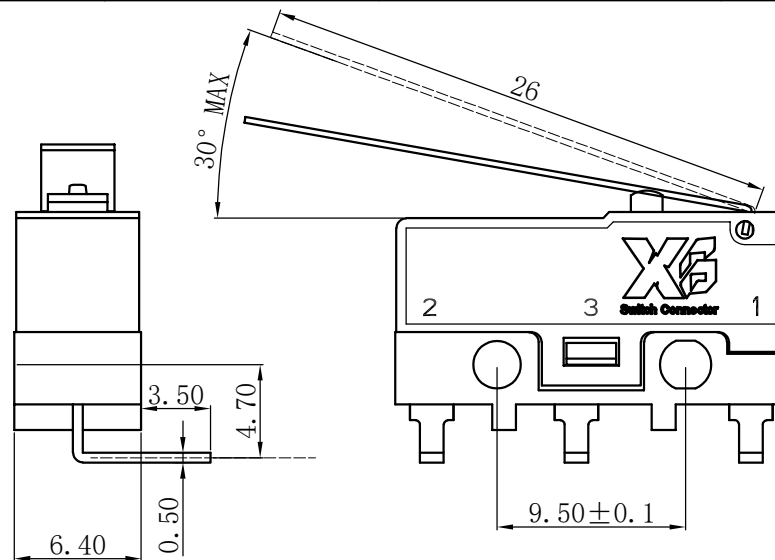
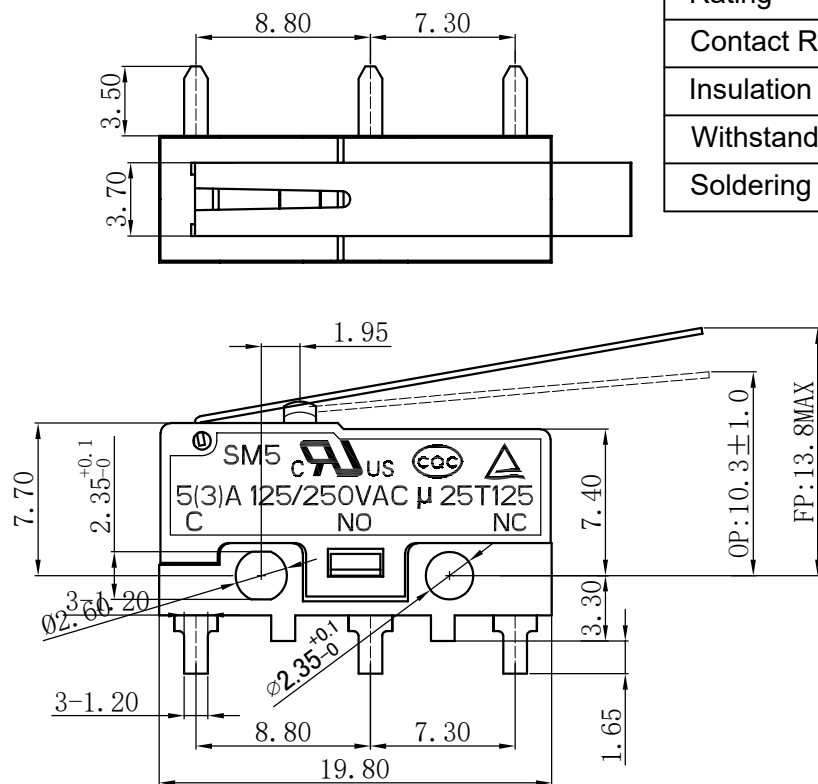


Rating	5 A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100mΩ Max	Electrical Life	10,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +125℃
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	30 ±20gf

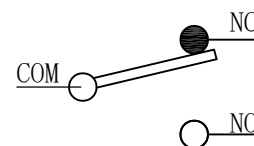

右弯脚

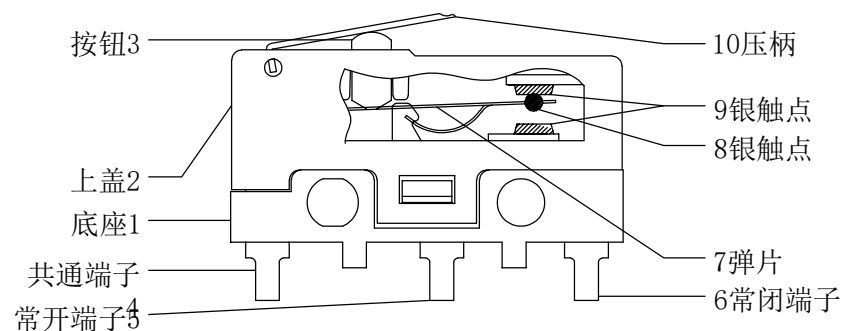

电路图

10	压柄	1	不锈钢	
9	端子触点	2	银合金	
8	弹片触点	1	银合金	
7	弹片	1	C5210	
6	NC端子	1	C2680	镀银
5	NO端子	1	C2680	镀银
4	COM端子	1	C2680	镀银
3	按钮	1	PBT	UL94V-0
2	上盖	1	PBT	UL94V-0
1	底座	1	PBT	UL94V-0
序号	零件名称	数量	材质	备注

制 图 DRAWIN				 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.					
设 计 DESIGN									
审 核 CHECKED			比 例 SCALE	4:1	名 称 TITLE	中 型 微 动 开 关			
核 准 APPROVE			张 数 SHEET	1/1	料 号 P/N NO.	XB-SM5-026CR-40-3			
一般公差 TOLERANCE		±0.20	单 位 UNIT	mm	模 具 编 号 P/N NO.				
		±0.15							
		±0.10	角 度 ANGLES	±2.0°	纸 张 SIZE	A4	角 度 P. R. O. J.		工 程 圖 ENG. DRAW
		±0.05							