


Recommended P.C.Board
Layout
(Tolerance:±0.05)


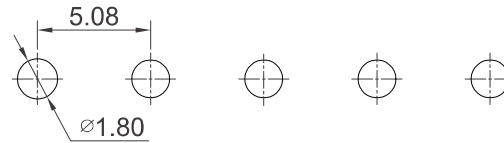


Specifications

Current Rating:7.9Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:1000VAC
Contact Resistance:30mΩMax.
Operating Temperature:-40°C to +105°C


Materials

Contact Material:
Brass(Pin length less than 25mm)
Phosphor Bronze(The total length of pin is more than 25mm)
Insulator Material:High Temperature Thermoplastic,
UL 94V-0 LCP
or the equivalent material **XI BANG**

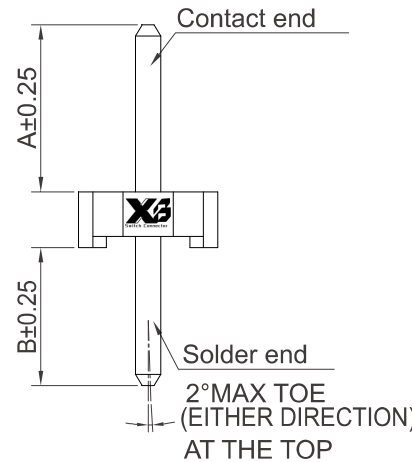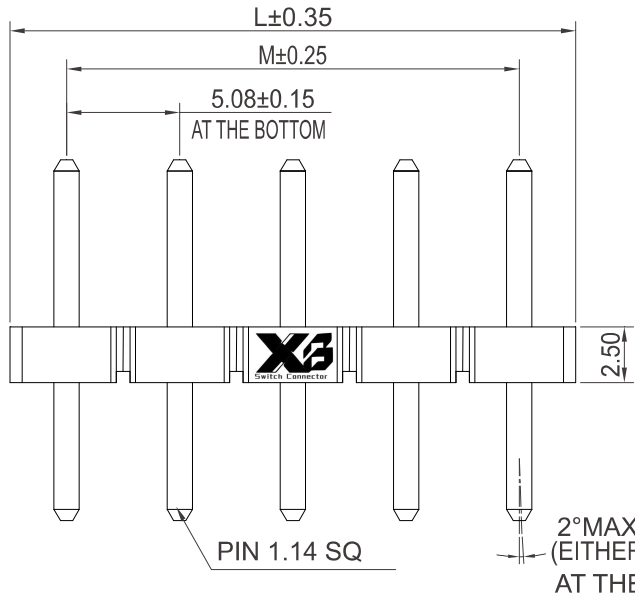

Ordering Information

XB-PZ-A-508-101

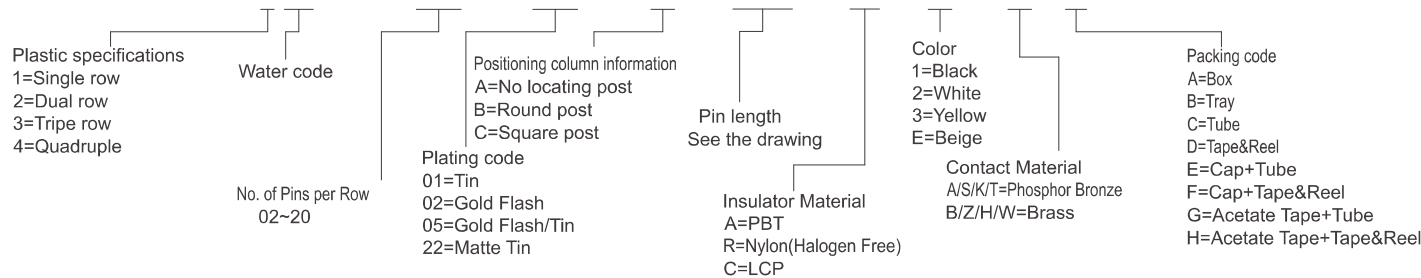

No. of PIN/ROW	Dimension Information	
	L	M
02	10.16	5.08
03	15.24	10.16
04	20.32	15.24
05	25.40	20.32
06	30.48	25.40
07	35.56	30.48
08	40.64	35.56
09	45.72	40.64
10	50.80	45.72
11	55.88	50.80
12	60.96	55.88
13	66.04	60.96
14	71.12	66.04
15	76.20	71.12
16	81.28	76.20
17	86.36	81.28
18	91.44	86.36
19	96.52	91.44
20	101.60	96.52

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

GENERAL TOLERANCE

X.°±5.0°	X.±0.30
.X°±3.0°	.X±0.25
.XX°±2.0°	.XX±0.15
.XXX°±1.0°	.XXX±0.10

DWG. NO. **XB-PZ-A-508-101**

PART NO.

TIT. **5.08 PIN HEADER
SINGLE ROW DIP TYPE
CONNECTOR**

REV.	UNIT.	SCALE	PAGE
01	mm	3:1	1/1