


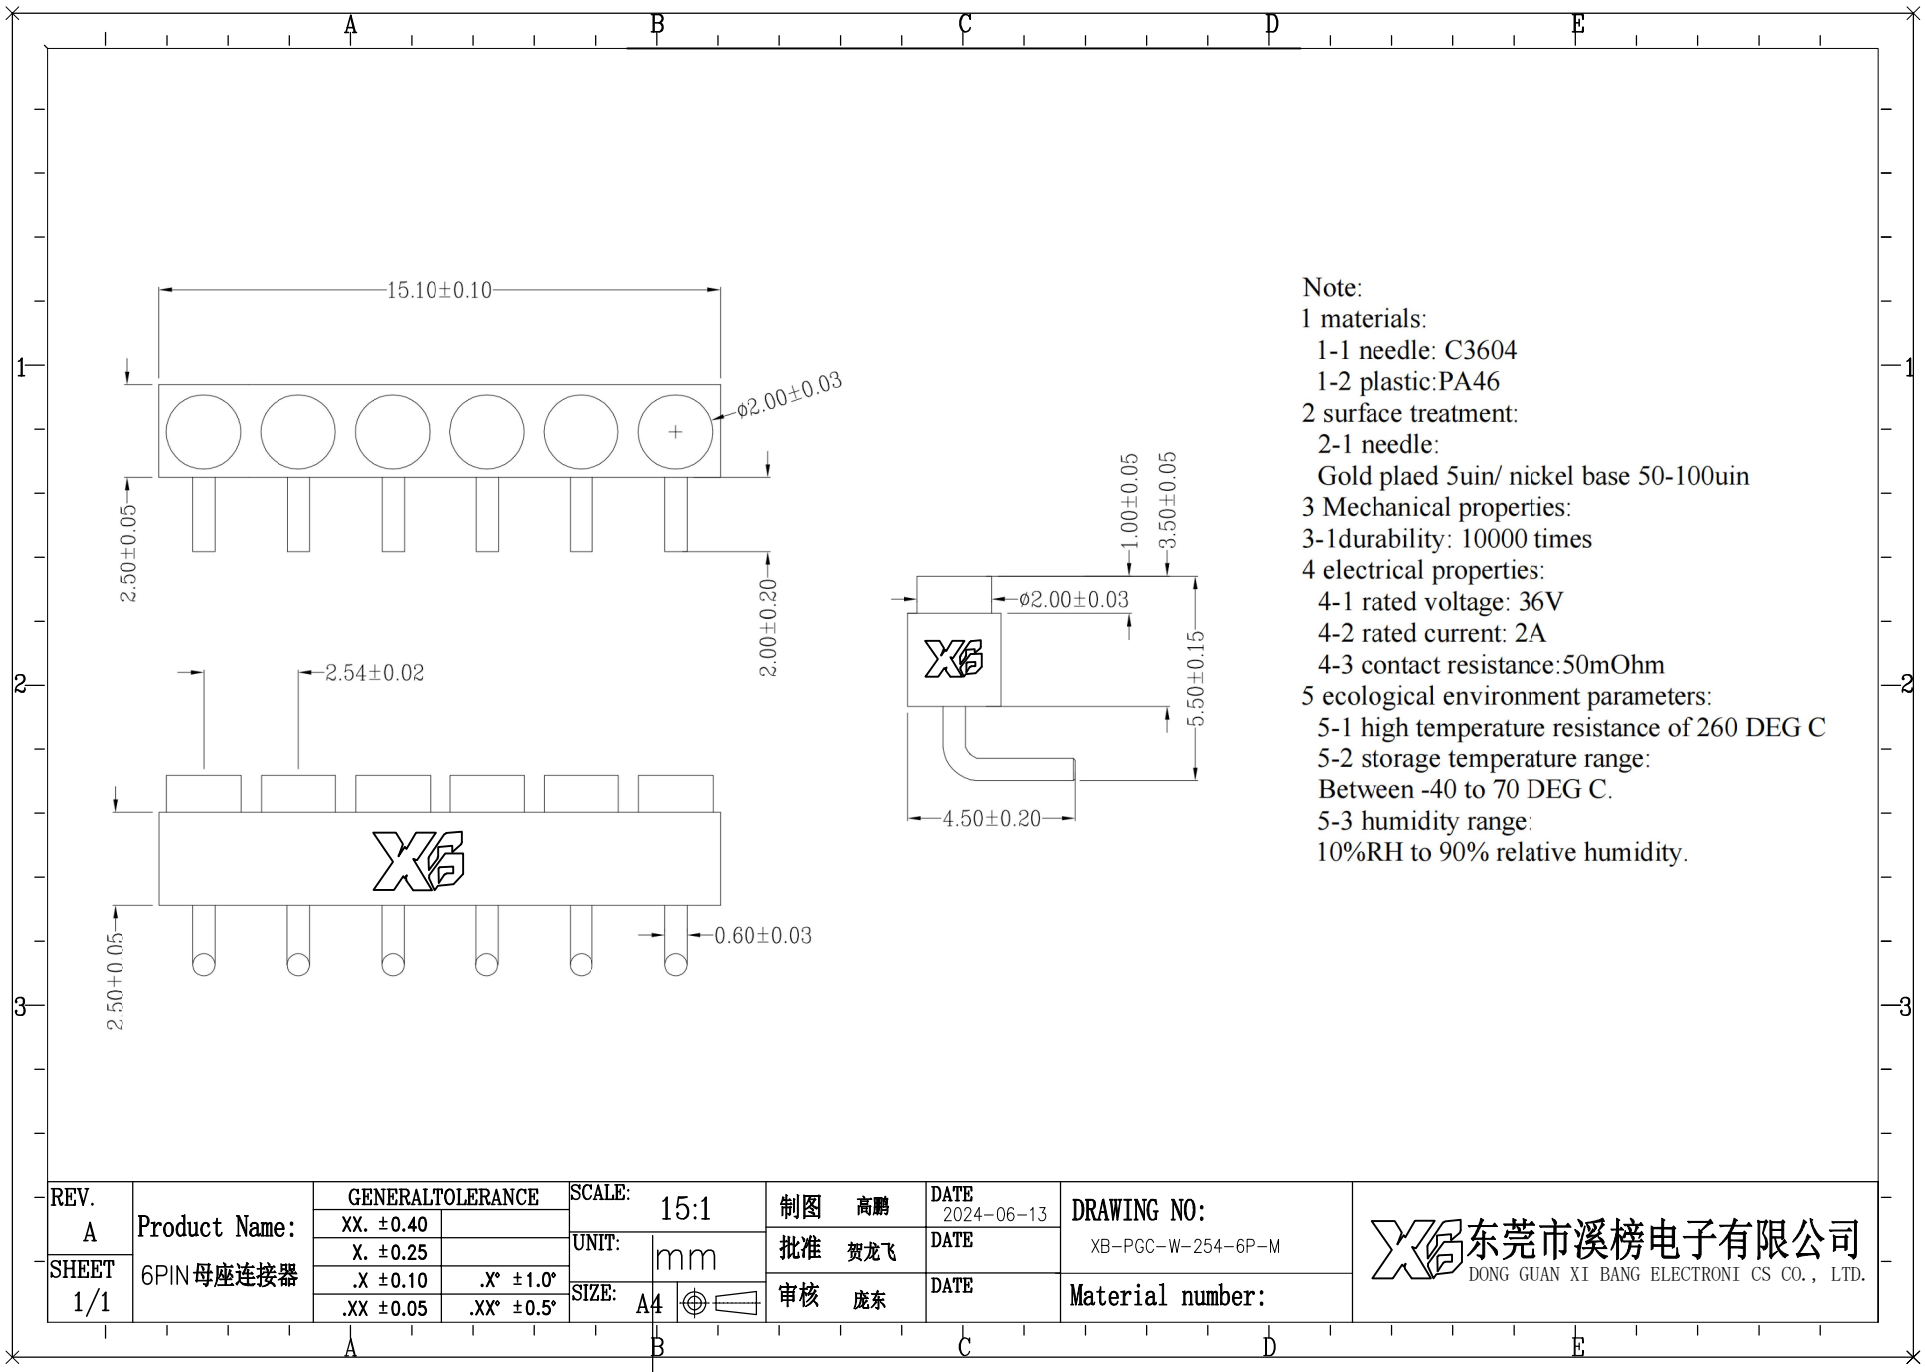

Note:
1 materials:
1-1 needle: C3604
1-2 plastic:PA46
2 surface treatment:
2-1 needle:
Gold plaed 5uin/ nickel base 50-100uin
3 Mechanical properties:
3-1durability: 10000 times
4 electrical properties:
4-1 rated voltage: 36V
4-2 rated current: 2A
4-3 contact resistance:50mOhm
5 ecological environment parameters:
5-1 high temperature resistance of 260 DEG C
5-2 storage temperature range:
Between -40 to 70 DEG C.
5-3 humidity range:
10%RH to 90% relative humidity.

REV. A	Product Name: 6PIN 母座连接器	GENERAL TOLERANCE		SCALE: 15:1	制图 高鹏	DATE 2024-06-13	DRAWING NO: XB-PGC-W-254-6P-M	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.
SHEET 1/1		XX. ±0.40		UNIT: mm	批准 贺龙飞	DATE		
.X ±0.10		.X° ±1.0°	SIZE: A4	审核 庞东	DATE	Material number:		
.XX ±0.05		.XX° ±0.5°						