

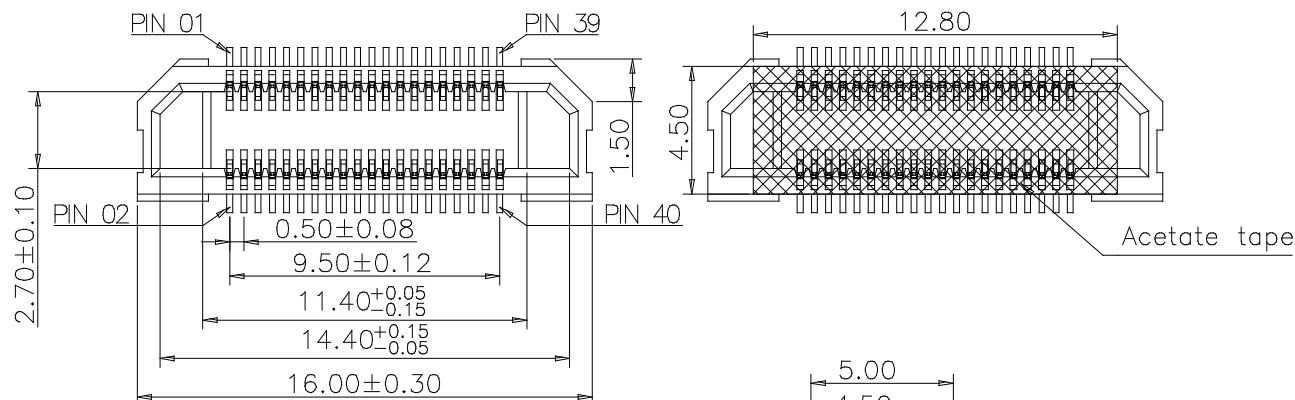




1 2 3 4 5 6 7 8 9



Specifications
Current Rating:0.5Amp
Insulation Resistance:500MΩMin.
Dielectric Withstanding Voltage:200VAC
Contact Resistance:30mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
All materials must meet XI BANG hazardous substances control standards.

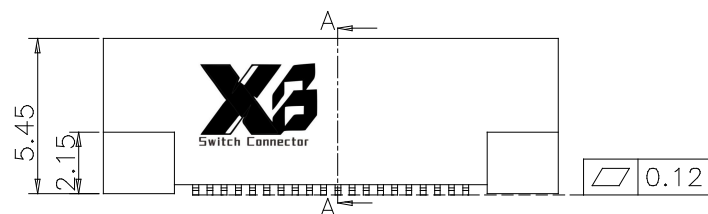

SECTION A-A

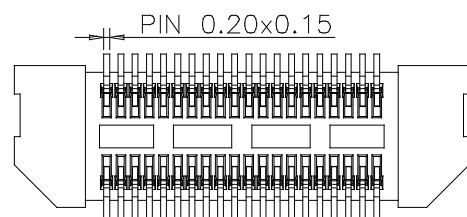

Ordering Information


XB-CAR-M-L230-SMD - XX XX A 001 C 1 T X

No. of Pins per Row
20


Standard Plating
02=Gold Flash
Selective Plating
01=Tin

Color
1=Black

Standard Packing
D=Tape&Reel
Selective Packing
H=Acetate tape+T&R

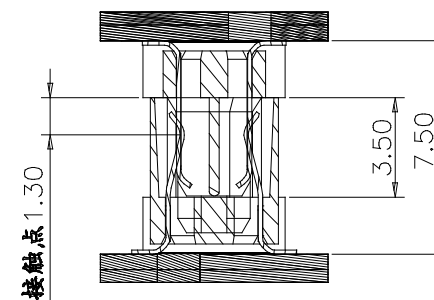

Recommended P.C.Board Layout
(Tolerance:±0.05)

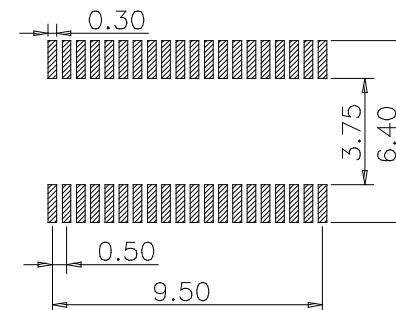

X3 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X.*±3.0°	.X.±0.25
.XX.*±2.0°	.XX.±0.15
.XXX.*±1.0°	.XXX.±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
XB-CAR-M-L230-SMD
PART NO.

TITLE.
0.50 B TO B FEMALE DUAL
ROWS SMT TYPE CONNECTOR

REV. 01 UNIT. mm SCALE. 4:1

1 2 3 4 5 6 7 8 9