

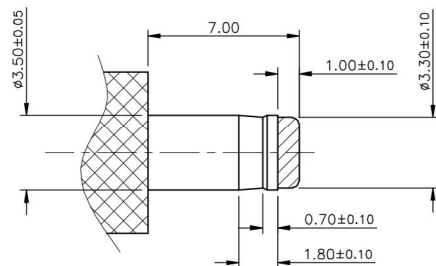





ROHS

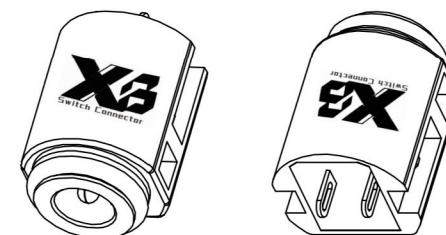

(3.50mm DC PLUG DETAIL DRAWING)

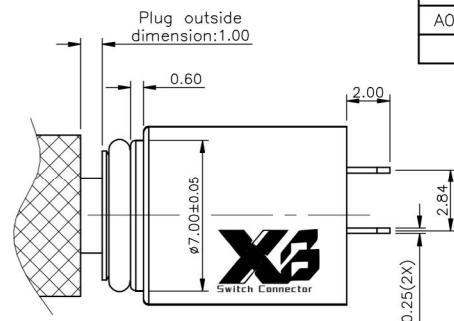


3D VIEW

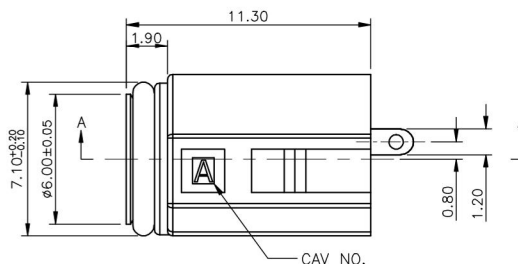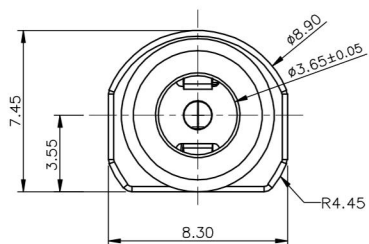

NOTES:

1. CONTACT CURRENT RATING: 3A;
2. CONTACT RESISTANCE: 60 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. INSERTION FORCE: 0.3~3.0kgf (3~30N);
7. EXTRACTION FORCE: 0.3~3.0kgf (3~30N);
8. WATERPROOF STRENGTH: IP-X7.
9. PRODUCT MEET THE REQUEST OF THE RoHS.



SCHEMATIC

SECTION A-A

06	GLUEWATER		环氧树脂 (EA235) 单组份	BLACK
05	O型圈	1 PCS	硅胶	RED UL 94V-0
04	COVER	1 PCS	PA66+30%GF	BLACK UL 94V-0
03	HOUSING	1 PCS	PA66+30%GF	BLACK UL 94V-0
02	PIN	1 PCS	BRASS T=0.25mm	1u" Au ALL OVER
01	CONTACT A	1 PCS	STAINLESS STEEL T=0.25mm	1u" Au ALL OVER
ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION

This document is the property of Xi Bang Electronic Technology Co., Ltd.		X3 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD	
Unless Otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 ANGLES ±3°		DESIGN: GAO PENG CHECKED: HE LONG FEI APPROVED: PANG DONG	DATE: 2016.01.11 DATE: DATE:
PART NO.: XB-DC-0317D20-IPX7		TITLE: DC POWER JACK CUSTOMER DRAWING	
DRAWING NO.:		REV.: A0	SCALE: 3:1
		SIZE: A4	UNIT: mm
		SHEET: 1/1	