

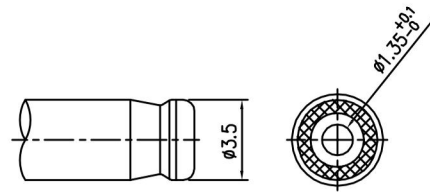
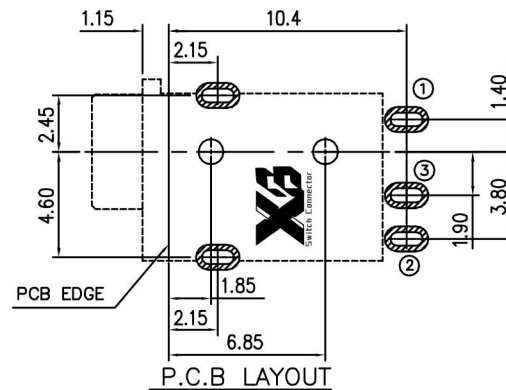
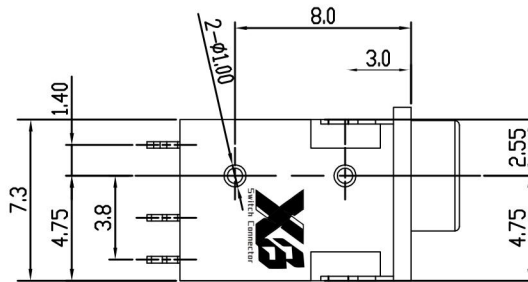
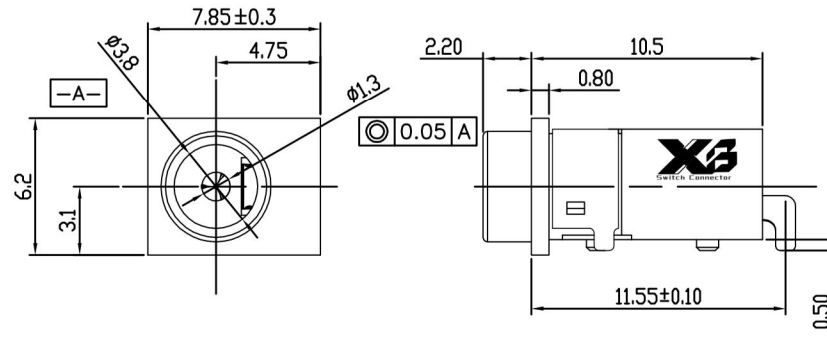


ROHS

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
AO	N/A		INITIAL RELEASE	2016.01.11	张丙行

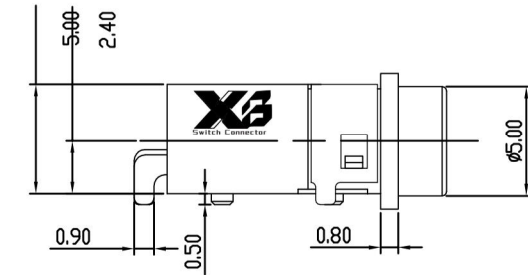

DC PLUG-REF



SCHEMATIC

SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-1.RATING: DC 3A 12V
 - 1-2.CONTACT RESISTANCE: 30mΩ MAX(INITAL)
 - 1-3.DIELECTRIC WITHSTANDING
VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN,
MEASURED BY 500V DC
- MECHANICAL PERFORMANCE
 - 2.1.OPERATING FORCE :0.5-2.0kgf
- LIFE TEST
 - 3.1.3-1.ELECTRONICS LIFE TEST 5,000 CYCLES.

4	TERMINAL3	C2680-H	1	Au PLATED
3	TERMINAL1,2	C5210-H	2	Au PLATED
2	INSERT MOLDING	PA10T UL94-V0	1	BLACK
1	HOUSING	PA10T UL94-V0	1	BLACK
NO.	PARTS	MATERIAL	QTY.	FINISHING

This document is the property of
Xi Bang Electronic Technology
Co., Ltd.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

Unless Otherwise
specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
ANGLES ±3°

DESIGN: GAO PENG

DATE: 2016.01.11

TITLE:

DC POWER JACK
CUSTOMER DRAWING

CHECKED: HE LONG FEI

DATE:

APPROVED: PANG DONG

DATE:

PART NO.: XB-DC-0318-IPX7

REV.: A0

SCALE: 3:1

UNIT: mm

DRAWING NO.:

SIZE: A4

SHEET: 1/1

