
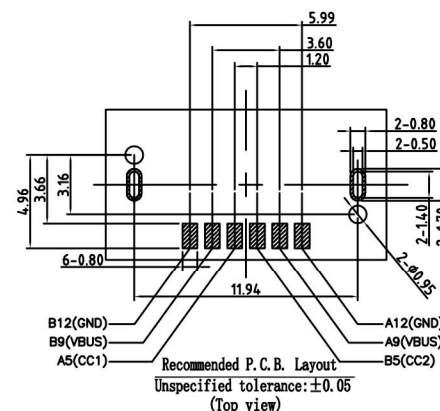
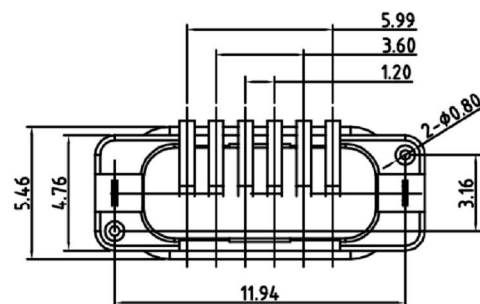
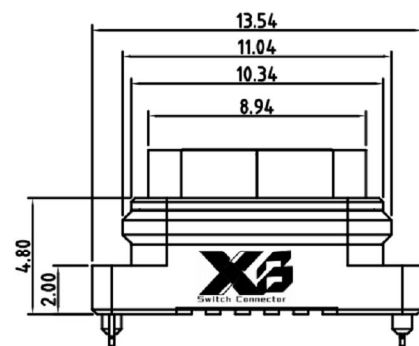
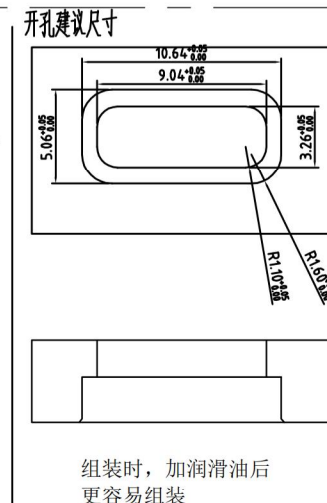
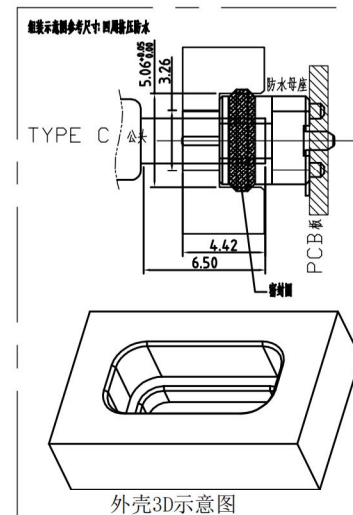
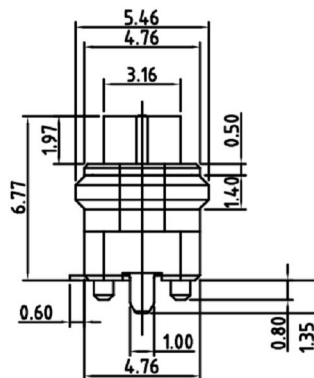


ROHS

REV.	ECN. NO.	APPD.

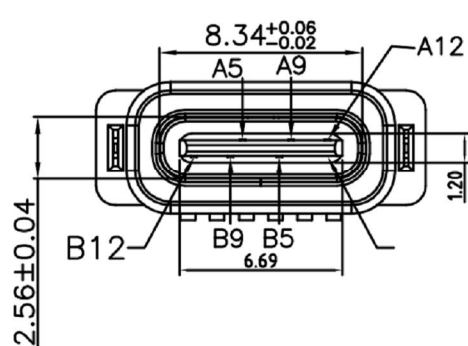

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05



NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE : 8N~20N
8. DURABILITY:5000 CYCLES

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

4	Shell1	1	SUS304 Ni Plating T=0.25mm	Ni40~120u ²
3	Housing2	1	LCP(G.F30%)	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni40~160u ² AwCONTACT AREA:3 OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PARTNAME	Q'TY	FINISH	NOTE

X.	± 0.50	X.*	$\pm 2^{\circ}$	UNITS
.X	± 0.30	.X*	$\pm 1^{\circ}$	mm
.XX	± 0.10	.XX*	$\pm 0.5^{\circ}$	MAT'L
.XXX	± 0.05			
MATERIAL	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XI BANG ELECTRONIC TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XI BANG ELECTRONIC TECHNOLOGY CO., LTD.			FINISH
				Q'TY

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.										
PART NO. XB-USB-C-6P-1143-6PIN-S-IPX7		TITLE: TYPE C 6Pin SMT 100%								
APPD: GAO. PENG		DWG NO: XB-USB-C-6P-1143-6PIN-S-IPX7								
CHKD: HE. LONG. FEI		 <table data-bbox="2013 1461 2145 1522"><tr><th>SCALE</th><th>SHEET</th><th>REV</th></tr><tr><td>1/1</td><td>1/2</td><td>A</td></tr></table>			SCALE	SHEET	REV	1/1	1/2	A
SCALE	SHEET				REV					
1/1	1/2	A								
DR: PANG. DONG										