


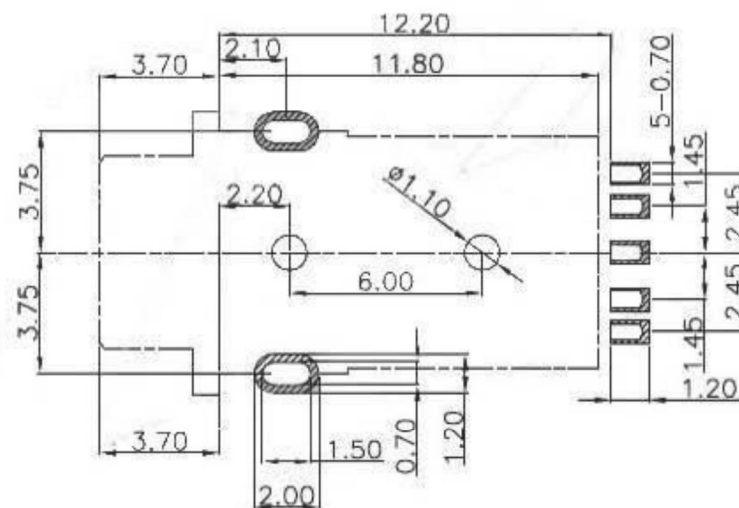
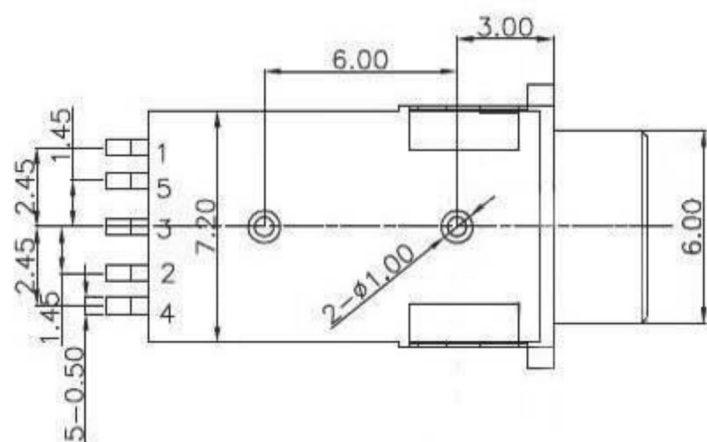
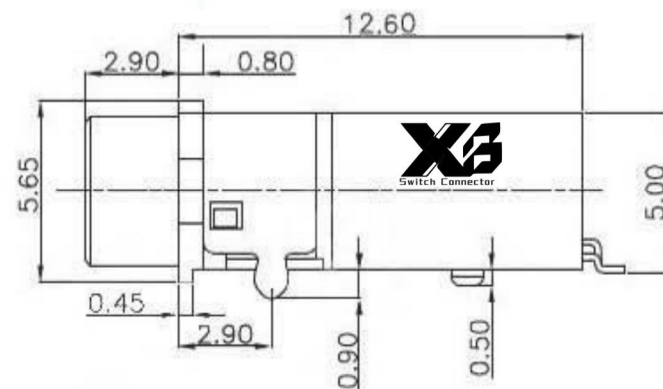
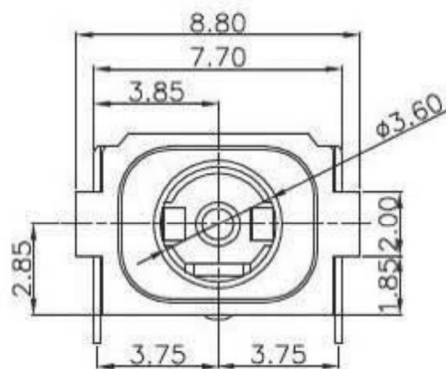


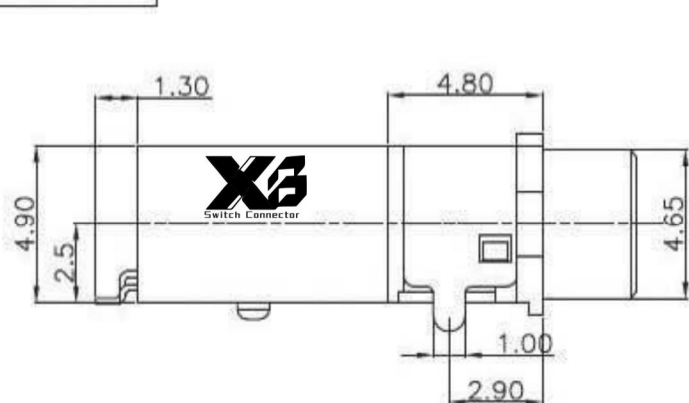

P.C.B Layout

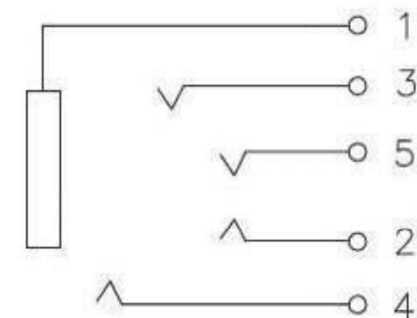

CIRCUIT DIAGRAM

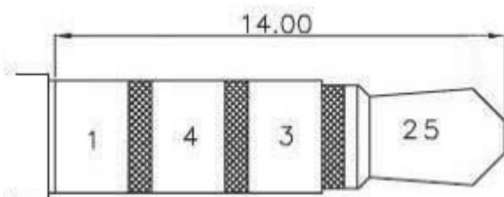

Φ3.5 MATE PLUG

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:10,000cycles

②	Terminal	——	5	Phosphor bronze	Au Plating	——
①	Housing	——	1	Nylon	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	
DRAWN						
CHECKED						
APPROVALS						
			TITLE:		PHONE JACKES	
			PART NO.		XB-PJ-32545-IPX7	
TOLERANCES ARE		30~40 ±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30 ±0.20				
		5~10 ±0.15				
		~ 5 ±0.10				
		±2°	DRAWING NO.	——	SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			