

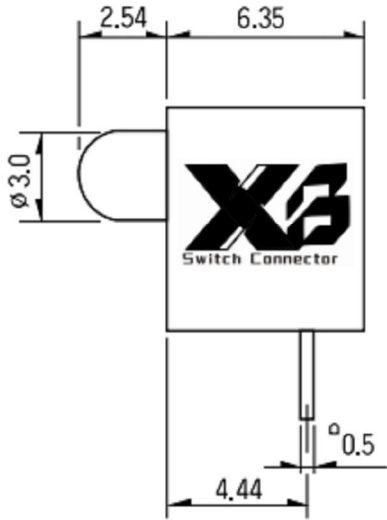



ROHS

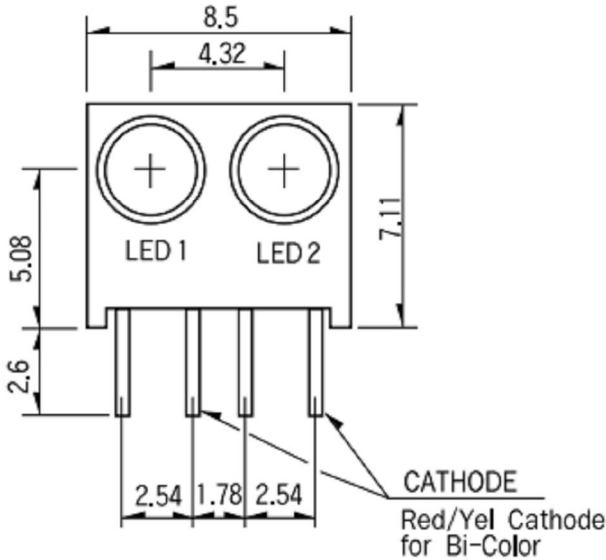

P.C.B DIMENSION

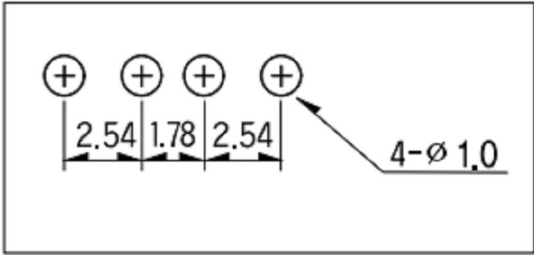

* Reverse Cathode Left : SEA-01 ☒ ☒ G
Housing Color : Gray



Number	0	1 (Bi-Color)	2	3	4 (Bi-Color)	8	9
Color	Blank	Red (Red/Green)	Green	Yellow	Amber (Yellow/Green)	Blue	White




Package	LED TYPE	Part No.	Chip		Lens Appearance	Absolute Maximum Ratings		Electro-optical Data (20mA)		Viewing Angle					
			Emitted Color	Peak Wavelength (nm)		ΔI (mW)	Pd (mW)	Vf (V)	Iv Typ. (mA)						
	High Efficiency	01	BL-B2141K	Green	568	Green Diffused	30	100	30	150	2.2	2.6	30.0	50	
		BL-B3141K	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	20.0	50		
		BL-B4141K	Amber	610	Amber Diffused	35	100	30	150	2.0	2.6	60.0	50		
		DL-D5141K	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	10.0	50		
		BL-BB41YIE	Super Blue	470	Blue Diffused	30	100	30	100	3.5	4.0	550	45		
	Low Current	02	BL-B5141K-L	Hi-Eff Red	635	Red Diffused	45	15	7	-	1.7	2.2	4.5	50	
		BL-B6141K-L	Green	568	Green Diffused	30	16	7	-	1.0	2.3	7.0	50		
		BL-B7141K-L	Yellow	585	Yellow Diffused	35	15	7	-	1.8	2.2	3.5	50		
		BR-B4541K-05V	Hi-Eff Red	635	Red Diffused	-	-	8	-	5	-	15.5	-		
		BR-B2141K-05V	Green	568	Green Diffused	-	-	8	-	5	-	15.5	-		
	Integral Resistor 5V	03	BR-B3141K-05V	Yellow	585	Yellow Diffused	-	-	8	-	5	-	14.0	-	
		BR-B4141K-05V	Orange	635	Orange Diffused	-	-	8	-	5	-	15.5	-		
		Bi-color	07	BL-BE2271E	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	25.0	45
			BL-BE2271E	Green	568	White Diffused	30	100	30	150	2.2	2.6	30.0	45	
			BL-BE2271E	Yellow	585	White Diffused	35	100	30	150	2.1	2.6	20.0	45	
	BL-BE2271E		Green	568	White Diffused	30	100	30	150	2.2	2.6	30.0	45		
		1.0" Lead Flangeless 4.8Ø	01	BL-B5133N	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	50.0	40
			BL-B2133N	Green	568	Green Diffused	30	100	30	150	2.2	2.6	65.0	40	
			BL-B3133N	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	50.0	40	
			BL-B5134N	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	13.0	45	
BL-B2134N			Green	568	Green Diffused	30	100	30	150	2.2	2.6	90.0	45		
T-1 3/4 1.0" Lead Flangeless 5Ø		07	BL-B3134N	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	70.0	45	
		BL-BB41R4N	Super Blue	470	Blue Diffused	30	100	30	100	3.5	4.0	550	45		
		BL-BE2274N	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	45.0	45		
		BL-BE2274N	Yellow	585	White Diffused	35	100	30	150	2.1	2.6	35.0	45		
		BL-BE2274N	Green	568	White Diffused	30	100	30	150	2.2	2.6	50.0	45		
	T-1 3/4 1.0" Lead Standard 15Ø	01	BL-BE2204	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	35.0	40	
		BL-BE2204	Green	568	White Diffused	30	100	30	150	2.2	2.6	45.0	40		
		BL-BE2204	Yellow	585	White Diffused	35	100	30	150	2.1	2.6	30.0	40		
		BL-BE2204	Green	568	White Diffused	30	100	30	150	2.2	2.6	45.0	40		
		BL-BE2204	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	4.0	80		
	2.0x5.0x7.0 1.0" Lead Rectangular	07	BL-RV7302R-B	Hi-Eff Red	635	Water Clear	45	100	30	150	2.0	2.6	4.5	80	
		BL-RV7302R-B	Green	568	Water Clear	30	100	30	150	2.2	2.6	4.5	80		
		BL-RV7302R-B	Yellow	585	Water Clear	35	100	30	150	2.1	2.6	4.5	80		
		BL-RV7302R-B	Green	568	Water Clear	30	100	30	150	2.2	2.6	4.5	80		
		BL-RV7302R-B	Hi-Eff Red	635	Water Clear	45	100	30	150	2.0	2.6	4.5	80		

Measuring items	Symbol	Measuring conditions	Judgment criteria for failure
Forward voltage	V _f (V)	I _f =20mA	Over U'x1.2
Reverse current	I _r (uA)	V _r =5V	Over U'x2
Luminous intensity	I _v (mcd)	I _f =20mA	Below S'X0.5



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB LED模块系列 XB LED MODULE Series
MODEL : XB-SEA-01xx



UNIT : MM	DWN.	ZENQ. CHEN	DATE	2024-4-8	TOLERANCE <=1.5mm ±0.1 >1.5mm ±0.2 >=10mm ±0.3	ANGLE TOL ±2°	2	TERMINAL	PBS STRIP	3	Au PLATED
SCALE : 7 : 1	CHK' D	DONG. PANG	DATE	2024-4-8			1	CASE	PBT	1	BLACK
VERSION	01	APPD.	FEI. LONG. HE	DATE	2024-4-8		NO.	PART NAME	MATERIAL	QTY	FINISHING