

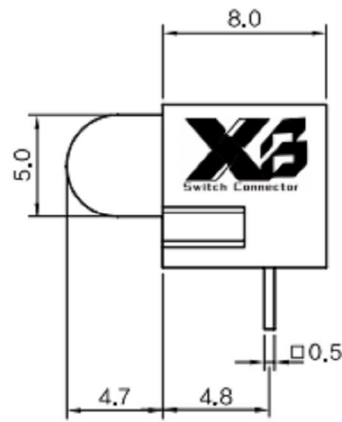
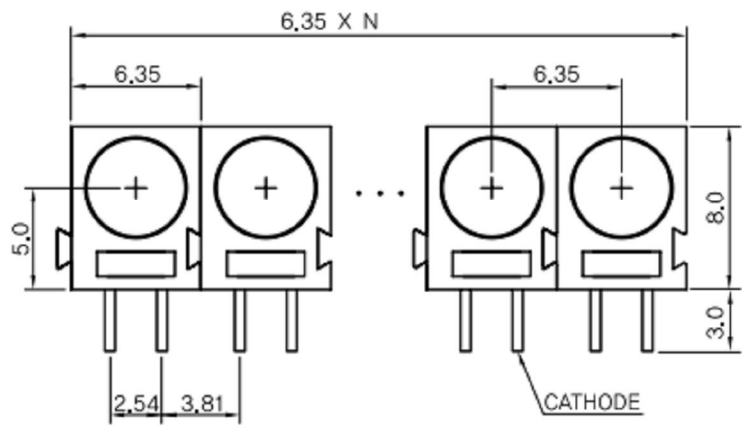


ROHS



* Reverse Cathode Left :
SUE-01- **XX** - **XX** G
Housing Color : Gray

P.C.B DIMENSION

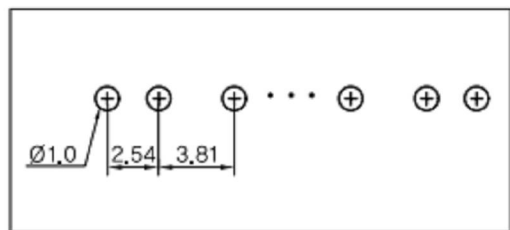

Number	0	1 (Bi-Color)	2	3	4 (Bi-Color)	8
Color	Blank	Red (Red/Green)	Green	Yellow	Amber (Yellow/Green)	Blue

Package	LED TYPE	Part No.	Chip		Lens	Absolute Maximum Ratings			Electro-optical Data (20mA)		Viewing Angle (°)			
			Emitted Color	Peak Peak Length (nm)		Appearance	ΔI (mW)	P_d (mW)	I_f (mA)	V_f (V)		I_v (mA)	I_v (mcd)	
	High Efficiency	01	BL-B2141K	Green	568	Green Diffused	30	100	30	150	2.2	2.6	30.0	50
			BL-B3141K	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	20.0	50
			BL-B41141K	Amber	610	Amber Diffused	35	100	30	150	2.0	2.6	60.0	50
			DL-D5141K	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	10.0	50
			BL-BB41Y1E	Super Blue	470	Blue Diffused	30	100	30	100	3.5	4.0	550	45
	Low Current	02	BL-B5141K-L	Hi-Eff Red	635	Red Diffused	45	15	7	-	1.7	2.2	4.5	50
			BL-B2141K-L	Green	568	Green Diffused	30	16	7	-	1.0	2.3	7.0	50
			BL-B3141K-L	Yellow	585	Yellow Diffused	35	15	7	-	1.8	2.2	3.5	50
			BR-B4541K-05V	Hi-Eff Red	635	Red Diffused	-	-	8	-	5	-	15.5	-
			BR-B2141K-05V	Green	568	Green Diffused	-	-	8	-	5	-	15.5	-
	Integral Resistor 5V	03	BR-B3141K-05V	Hi-Eff Red	635	Red Diffused	-	-	8	-	5	-	15.5	-
			BR-B3141K-05V	Green	568	Green Diffused	-	-	8	-	5	-	15.5	-
			BR-B4141K-05V	Yellow	585	Yellow Diffused	-	-	8	-	5	-	14.0	-
			BR-B4141K-05V	Orange	635	Orange Diffused	-	-	8	-	5	-	15.5	-
			BL-BE271E	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	25.0	45
	Bi-color	07	BL-BE271E	Green	568	White Diffused	30	100	30	150	2.2	2.6	30.0	45
			BL-BE271E	Yellow	585	White Diffused	35	100	30	150	2.1	2.6	20.0	45
			BL-BE271E	Green	568	White Diffused	30	100	30	150	2.2	2.6	30.0	45
			BL-B5133N	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	50.0	40
			BL-B2133N	Green	568	Green Diffused	30	100	30	150	2.2	2.6	65.0	40
	1.0" Lead Flangeless 4.82	01	BL-B3133N	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	50.0	40
			BL-B5134N	Bright Red	700	Red Diffused	90	50	15	50	2.2	2.6	13.0	45
			BL-B2134N	Green	568	Green Diffused	30	100	30	150	2.2	2.6	90.0	45
			BL-B3134N	Yellow	585	Yellow Diffused	35	100	30	150	2.1	2.6	70.0	45
			BL-BB41R4N	Super Blue	470	Blue Diffused	30	100	30	100	3.5	4.0	550	45
	T-1 3/4 1.0" Lead Flangeless 5.0	07	BL-BE274N	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	45.0	45
			BL-BE274N	Green	568	White Diffused	30	100	30	150	2.2	2.6	50.0	45
			BL-BE274N	Yellow	585	White Diffused	35	100	30	150	2.1	2.6	35.0	45
			BL-BE274N	Green	568	White Diffused	30	100	30	150	2.2	2.6	50.0	45
			BL-BE274N	Yellow	585	White Diffused	35	100	30	150	2.1	2.6	35.0	45
	T-1 3/4 1.0" Lead Standard 5.0	01	BL-BE274N	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	35.0	45
			BL-BE274N	Green	568	White Diffused	30	100	30	150	2.2	2.6	45.0	40
			BL-BE274N	Yellow	585	White Diffused	35	100	30	150	2.1	2.6	30.0	40
			BL-BE274N	Green	568	White Diffused	30	100	30	150	2.2	2.6	40.0	40
			BL-BE274N	Yellow	585	White Diffused	35	100	30	150	2.1	2.6	40.0	40
	2.0x5.0x7.0 1.0" Lead Rectangular	01	BL-BE274N	Hi-Eff Red	635	White Diffused	45	100	30	150	2.0	2.6	4.0	80
			BL-BE274N	Green	568	White Diffused	30	100	30	150	2.2	2.6	4.5	80
			BL-BE274N	Yellow	585	White Diffused	35	100	30	150	2.1	2.6	4.5	80
			BL-BE274N	Green	568	White Diffused	30	100	30	150	2.2	2.6	4.5	80
			BL-BE274N	Yellow	585	White Diffused	35	100	30	150	2.1	2.6	4.5	80