

F

E

D

C

B

A

F

E

D

C

B

A


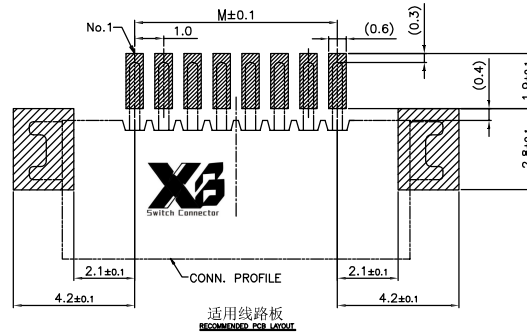
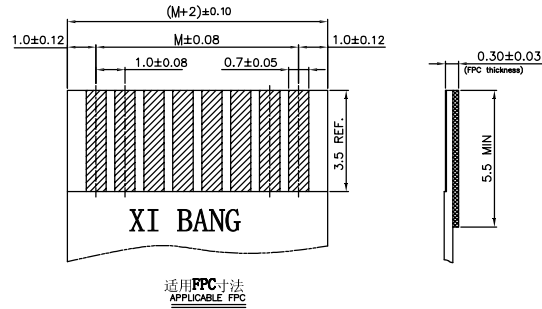




TABLE:

No. of Contacts	Dimension Information		
	M	L1	L
05	4.00	6.05	9.00
06	5.00	7.05	10.00
08	7.00	9.05	12.00
17	16.00	18.05	21.00
30	29.00	31.05	34.00



NOTES:

RATING
OPERATING TEMPERATURE: -25~85°C
OPERATING VOLTAGE: 125V AC/DC
CURRENT RATING: 0.5 AMPS
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC/Minute;
INSULATION RESISTANCE: 100MΩ Min;
CONTACT RESISTANCE: 0.03Ω Max;

MATERIAL;
CONTACT MATERIAL: PHOSPHOR BRONZE
FITTING NAIL: PHOSPHOR BRONZE
HOUSING MATERIAL: PA6T UL94V-0

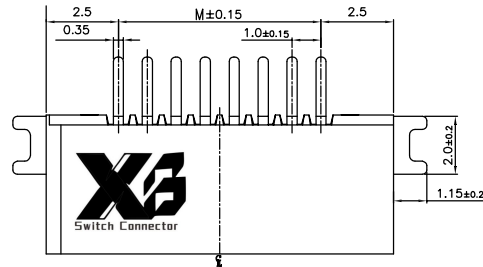

SECTION A-A

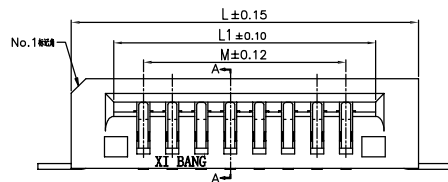

Ordering Information

XB-FPC-10-114-A020-XX-XX

A 020 B X

A X

No. of Pins per Row
SEE TABLE


Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash /Tin

Color
1=Black
2=White

Standard Packing
D=Tape Reel

 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.*±5.0°	X.±/
.X'±3.0°	.X±0.25
.XX'±2.0°	.XX±0.20
.XXX'±1.0°	.XXX±0.10

DESIGNED:

DATE:

DWG. NO.

XB-FPC-10-114-A020

TITLE.

1.0 FPC CONN. NON ZIF SMT B-3.1 LOWER CONTACT

CHECKED:

DATE:

PART NO.

APPROVED:

DATE:

REV. A	UNIT. mm	SCALE. 1:1
--------	----------	------------

1

2

3

4

5

6

7

8

9