
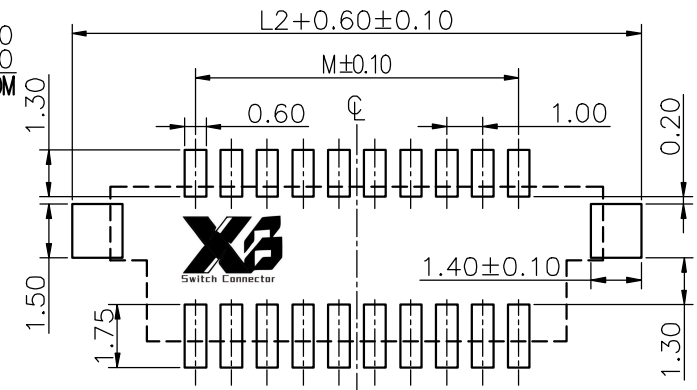
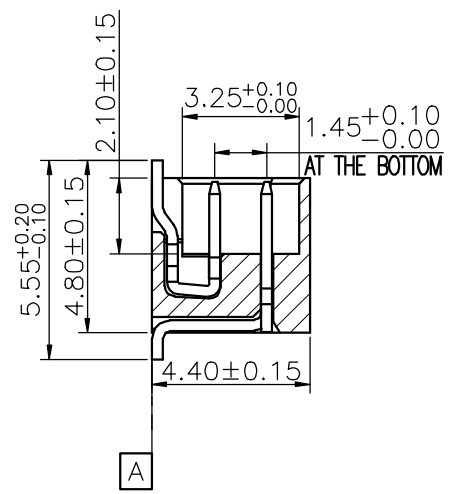
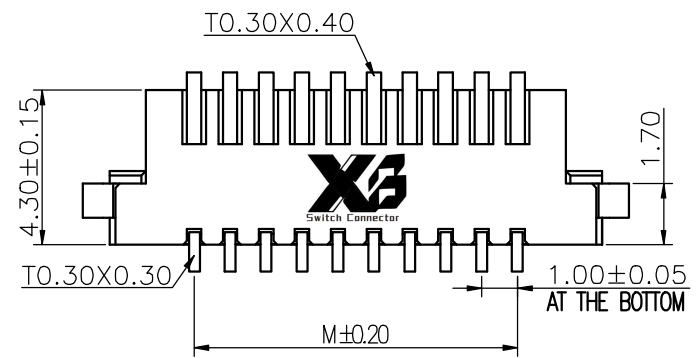


Specifications
Current Rating:1.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:
Nylon(High temperature resistance),
LCP(High temperature resistance),
UL 94V-0
All materials must meet XI BANG
hazardous substances control standards.

Recommended P.C.Board
Layout
(Tolerance:±0.05)

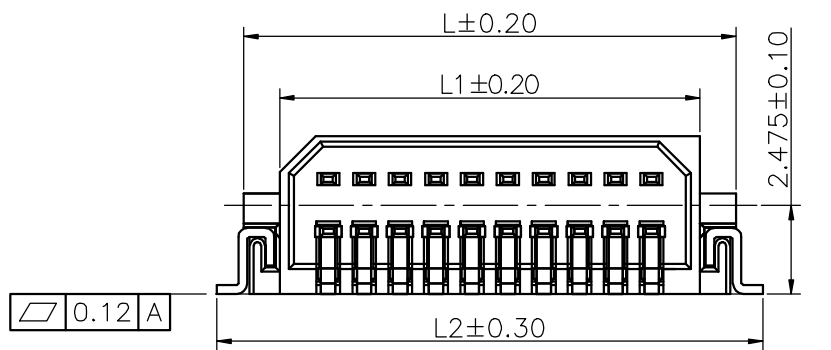

Ordering Information

XB-X-10-G-204 - XX XX A XXX C

Plastic specifications
1=Single row
2=Dual row
3=Tripe row
4=Quadruple

Water code

No. of Pins per Row
05~15

Positioning column information
A=No locating post
B=Round post
C=Square post

Pin length
See the drawing

Insulator Material
R=Nylon(Halogen Free)
C=LCP

Color
1=Black
E=Beige

Contact Material
A/S/K/T=Phosphor Bronze

Packing code
A=Box
B=Tray
C=Tube
D=Tape&Reel

No. of PIN/ROW	Dimension Information			
	M	L2	L1	L
05	4.00	10.25	6.70	8.70
06	5.00	11.25	7.70	9.70
07	6.00	12.25	8.70	10.70
08	7.00	13.25	9.70	11.70
09	8.00	14.25	10.70	12.70
10	9.00	15.25	11.70	13.70
11	10.00	16.25	12.70	14.70
12	11.00	17.25	13.70	15.70
13	12.00	18.25	14.70	16.70
14	13.00	19.25	15.70	17.70
15	14.00	20.25	16.70	18.70

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

REV.	UNIT.	SCALE.	PAGE.
01	mm	5:1	1/1

GENERAL TOLERANCE	
X.'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
CO SIGNED:	DATE:
APPROVED:	DATE:

DWG. NO.	TITLE.
XB-X-10-G-204	1.00Pitch ROWS BASE Board to Board MALE