


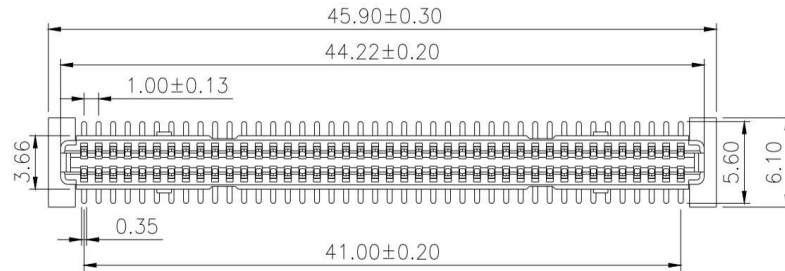




Specifications
Current Rating:1.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:
LCP(High temperature resistance),
UL 94V-0
All materials must meet XI BANG
hazardous substances control standards.

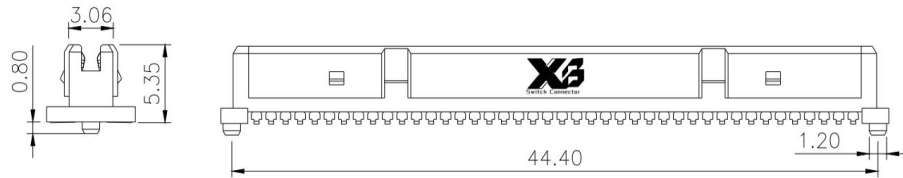

Mating with




B02

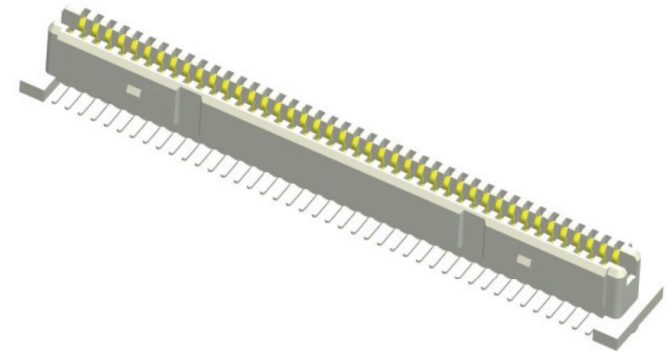

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

REV. 01 UNIT. mm SCALE. 5:1 PAGE. 1/1



GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:
CHECKED:
CO SIGEND:
APPROVED:

DATE:
DATE:
DATE:
DATE:

DWG. NO.
XB-X-10-M-L210
PART NO.

TITLE.
1.00 PITCH
FEMALE BOARD TO BOARD
SMT TYPE