



F

F



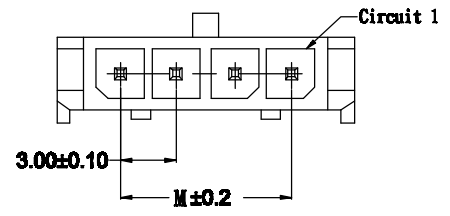


■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ


E

E

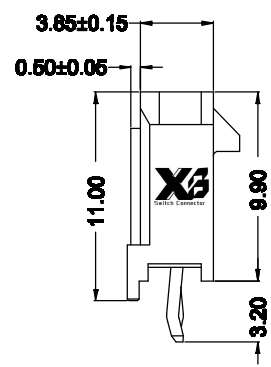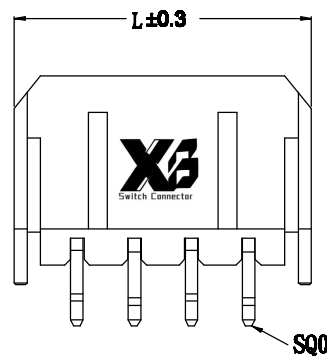

03-12PIN
Kink Cross

02PIN
Kink Identical

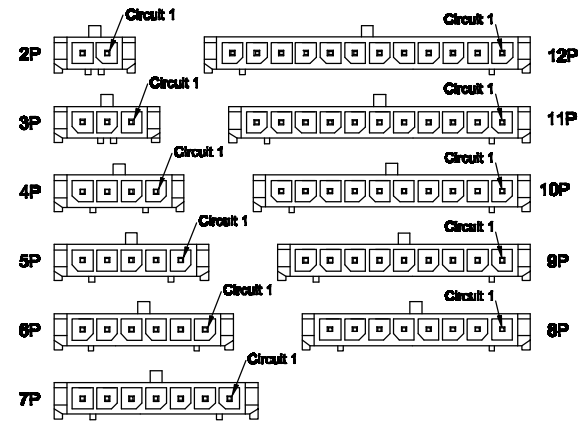


D

D

C

C

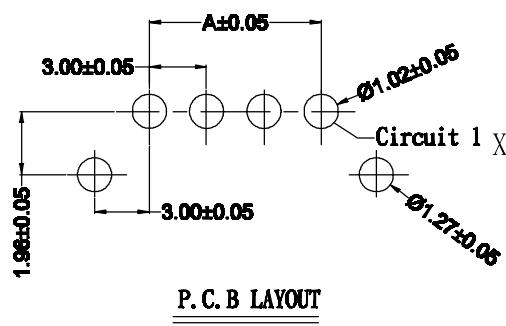

P. C. B LAYOUT

Ordering Information

XB-X30-PCB-108-XX XX A 802 A X B X

No. of Pins per Row: 02~12
Standard Plating: 01=Tin, Selective Plating: 02=Gold Flash
Color: 1=Black, ...
Standard Packing: N=PE Bag, Selective Packing: B=Tray

Poles	Dimensions(mm)	
	M	L
02	3.00	9.65
03	6.00	12.65
04	9.00	15.65
05	12.00	18.65
06	15.00	21.65
07	18.00	24.65
08	21.00	27.65
09	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

A

A

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	3RD.ANG PROJ. 	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. XB-X30-PCB-108	TITLE. 3.00mm Crimp Style Connectors
		X: ±5.0°	X: ±/				
REV. A	UNIT. mm	SCALE. N:A	PAGE. 1/1	APPROVED:	DATE:	PART NO.	