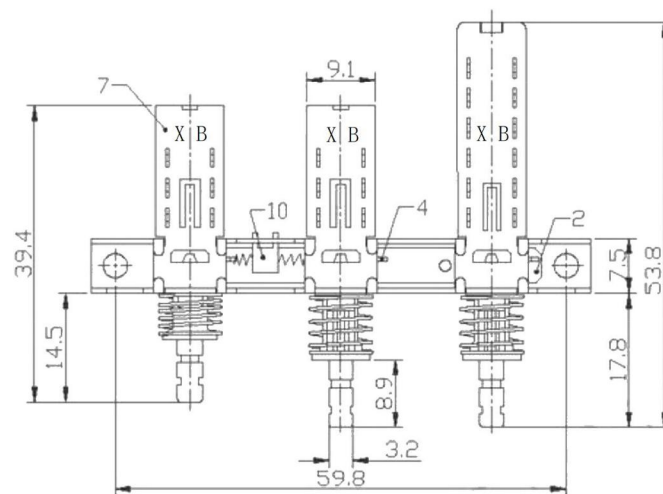
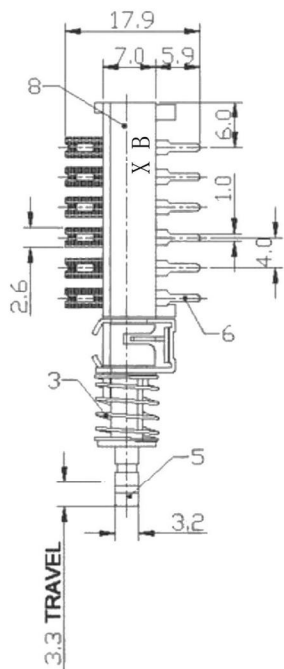


ITEM: PERFORMANCE

Title: PUSH BUTTOMN SWICH

Model: XB-PBS-3B-IA2IB-F18H

Rating: 0.3A 50V DC

Function: 6P2T

Timing: Non-shorting

Contact Resistance (mohms): 30mΩ max

Insulation Resistanc (Mohms): 100mΩ min at 500V DC

Dielectric Strength (V): AC 500V for 1 min

Life Test: 10000 Cycles



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : PUSH BUTTON SWITCH

MODEL : XB-PBS-5D-IAIBIA3-F18H



TOLERANCE
≤5.0mm ±0.1
>5.0mm ±0.2

ANGLE TOL
±2°

10	POSITION PLATE	IRON STRIP	1	Ni PLATED
9	CONTACT	BRASS STRIP	8	Ag PLATED
8	CASE	ABS	1	BLACK
7	COVER	ABS	1	CLEAR
6	TERMINAL	BRASS STRIP	24	Ag PLATED
5	KNOB	POM	1	WHITE
4	POSITION PLATE	IRON STRIP	3	Ni PLATED
3	SPRING	STEEL WIRE	4	NATURE
2	BLOCK	SUS	1	NATURE
1	FRAME	IRON STRIP	1	Zn PLATED
NO.	PART NAME	MATERIAL	QTY	FINISHING

UNIT : MM	DWN.		DATE	
SCALE : 1 : 1	CHK'D		DATE	
VERSION	01	APPD.	DATE	