
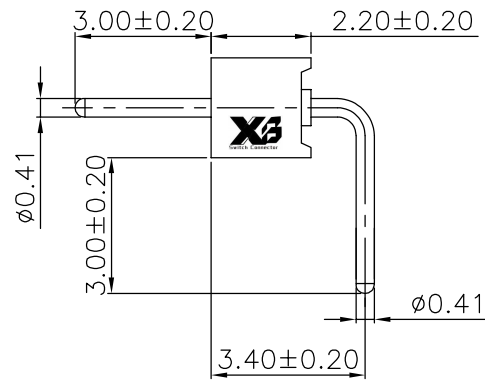


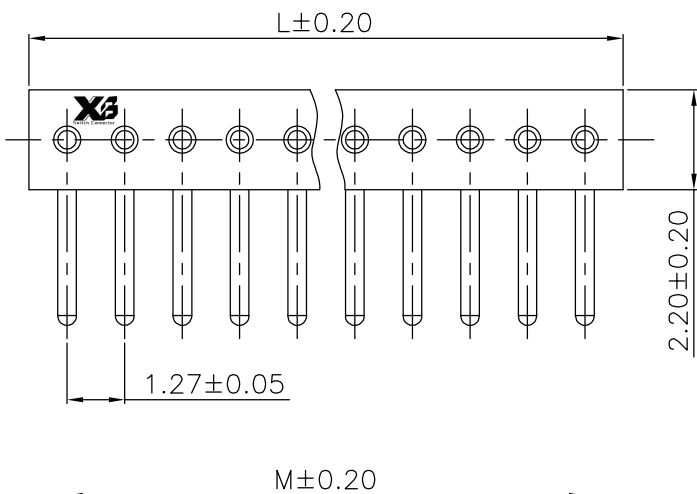

Ordering Information

XB-PM-Y-127X - XX XX A 003 S X B X

No. Of Pins Per Row
01~40


Standard Plating
01=Tin
02=Gold Flash
B1=Gold 3u"

Color
1=Black

Standard Packing
C=Tube
N=PE Bag

Specifications
Current Rating:3A
Dielectric Withstanding Voltage: 1000V
Contact Resistance: 10mΩ Max.
Materials
Contact Material: Brass
Insulator Material:PPS,UL 94V-0
All materials must meet XI BANG
hazardous substances control standards.

No. of PIN/ROW	M	L
01	0	1.68
02	1.27	2.95
03	2.54	4.22
04	3.81	5.49
05	5.08	6.76
06	6.35	8.03
07	7.62	9.30
08	8.89	10.57
09	10.16	11.84
10	11.43	13.11
11	12.70	14.38
12	13.97	15.65
13	15.24	16.92
14	16.51	18.19
15	17.78	19.46
16	19.05	20.73
17	20.32	22.00
18	21.59	23.27
19	22.86	24.54
20	24.13	25.81
21	25.40	27.08
22	26.67	28.35
23	27.94	29.62
24	29.21	30.89
25	30.48	32.16
26	31.75	33.43
27	33.02	34.70
28	34.29	35.97
29	35.56	37.24
30	36.83	38.51
31	38.10	39.78
32	39.37	41.05
33	40.64	42.32
34	41.91	43.59
35	43.18	44.86
36	44.45	46.13
37	45.72	47.40
38	46.99	48.67
39	48.26	49.94
40	49.53	51.21

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD			 PAGE. 1/1	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. XB-PM-Y-127X-101-A003	TITLE. 1.27mm PIN R/A TYPE CONNECTOR
REV. A	UNIT. mm	SCALE. 1:1		X.±3'	X.±/	CHECKED:	DATE:		
				.X'±3'	.X±0.30	APPROVED:	DATE:		
				.XX'±3'	.XX±0.25			PART NO.	
				.XXX'±3'	.XXX±0.20				