
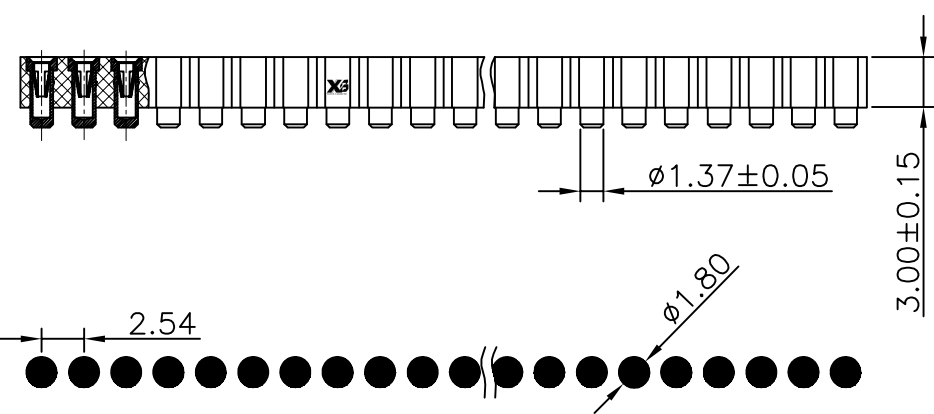


F
E
D
C
B
A

F
E
D
C
B
A

AV

123456789

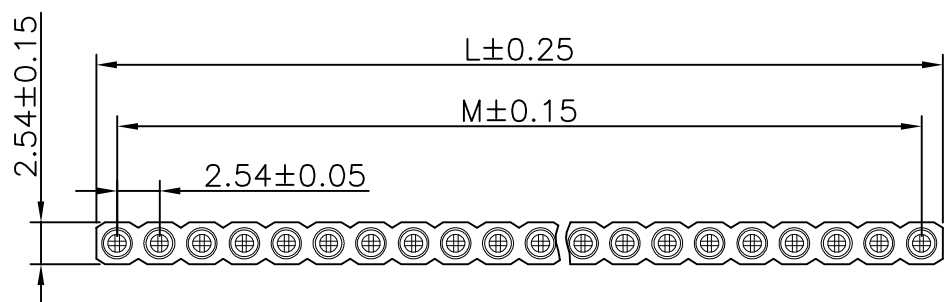

Specifications
Current Rating:3A
Contact Resistance:10mΩMax.
Dielectric Withstanding Voltage:1000V RMS
Mating pins: Outside Diameter 0.40 to 0.66 mm
Forces: (polished steel gauge 0.46 mm)
Insertion:2.5 N typ.
Withdrawal:0.7N typ.
Operating Temperature:-60°C to +85°C
Materials
Contact Material:Brass
Contact clip(4 finger):Berylliumcopper (C17200)
Insulator Material: UL 94V-0 PPS
All materials must meet XI BANG
hazardous substances control standards.

No. of PIN/ROW	M	L
01	0	2.34
02	2.54	4.88
03	5.08	7.42
04	7.62	9.96
05	10.16	12.50
06	12.70	15.04
07	15.24	17.58
08	17.78	20.12
09	20.32	22.66
10	22.86	25.20
11	25.40	27.74
12	27.94	30.28
13	30.48	32.82
14	33.02	35.36
15	35.56	37.90
16	38.10	40.44
17	40.64	42.98
18	43.18	45.52
19	45.72	48.06
20	48.26	50.60
21	50.80	53.14
22	53.34	55.68
23	55.88	58.22
24	58.42	60.76
25	60.96	63.30
26	63.50	65.84
27	66.04	68.38
28	68.58	70.92
29	71.12	73.46
30	73.66	76.00
31	76.20	78.54
32	78.74	81.08
33	81.28	83.62
34	83.82	86.16
35	86.36	88.70
36	88.90	91.24
37	91.44	93.78
38	93.98	96.32
39	96.52	98.86
40	99.06	101.6

Ordering Information

103 - XX XX A 001 S X B X
No. Of Pins Per Row 01~40
Standard Plating
01=Tin
02=Gold Flash
05=Gold Flash/Tin
64=Gold 3u"/Tin
Color
1=Black
Standard Packing
D=T&R

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD			3RD.ANG PROJ. PAGE. 1/1	GENERAL TOLERANCE X.*±5.0° X.±0.38 .X*±3.0° .X±0.30 .XX*±2.0° .XX±0.25 .XXX*±1.0° .XXX±0.20		DESIGNED:	DATE:	DWG. NO. XB-PM-Y-254M-103-A001 PART NO.	TITLE. 2.54mm SIP Socket H=3.00mm SMT type L=4.2
REV. A	UNIT. mm	SCALE. 1:1				CHECKED:	DATE:		
						APPROVED:	DATE:		

123456789