


ROHS

版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20181112

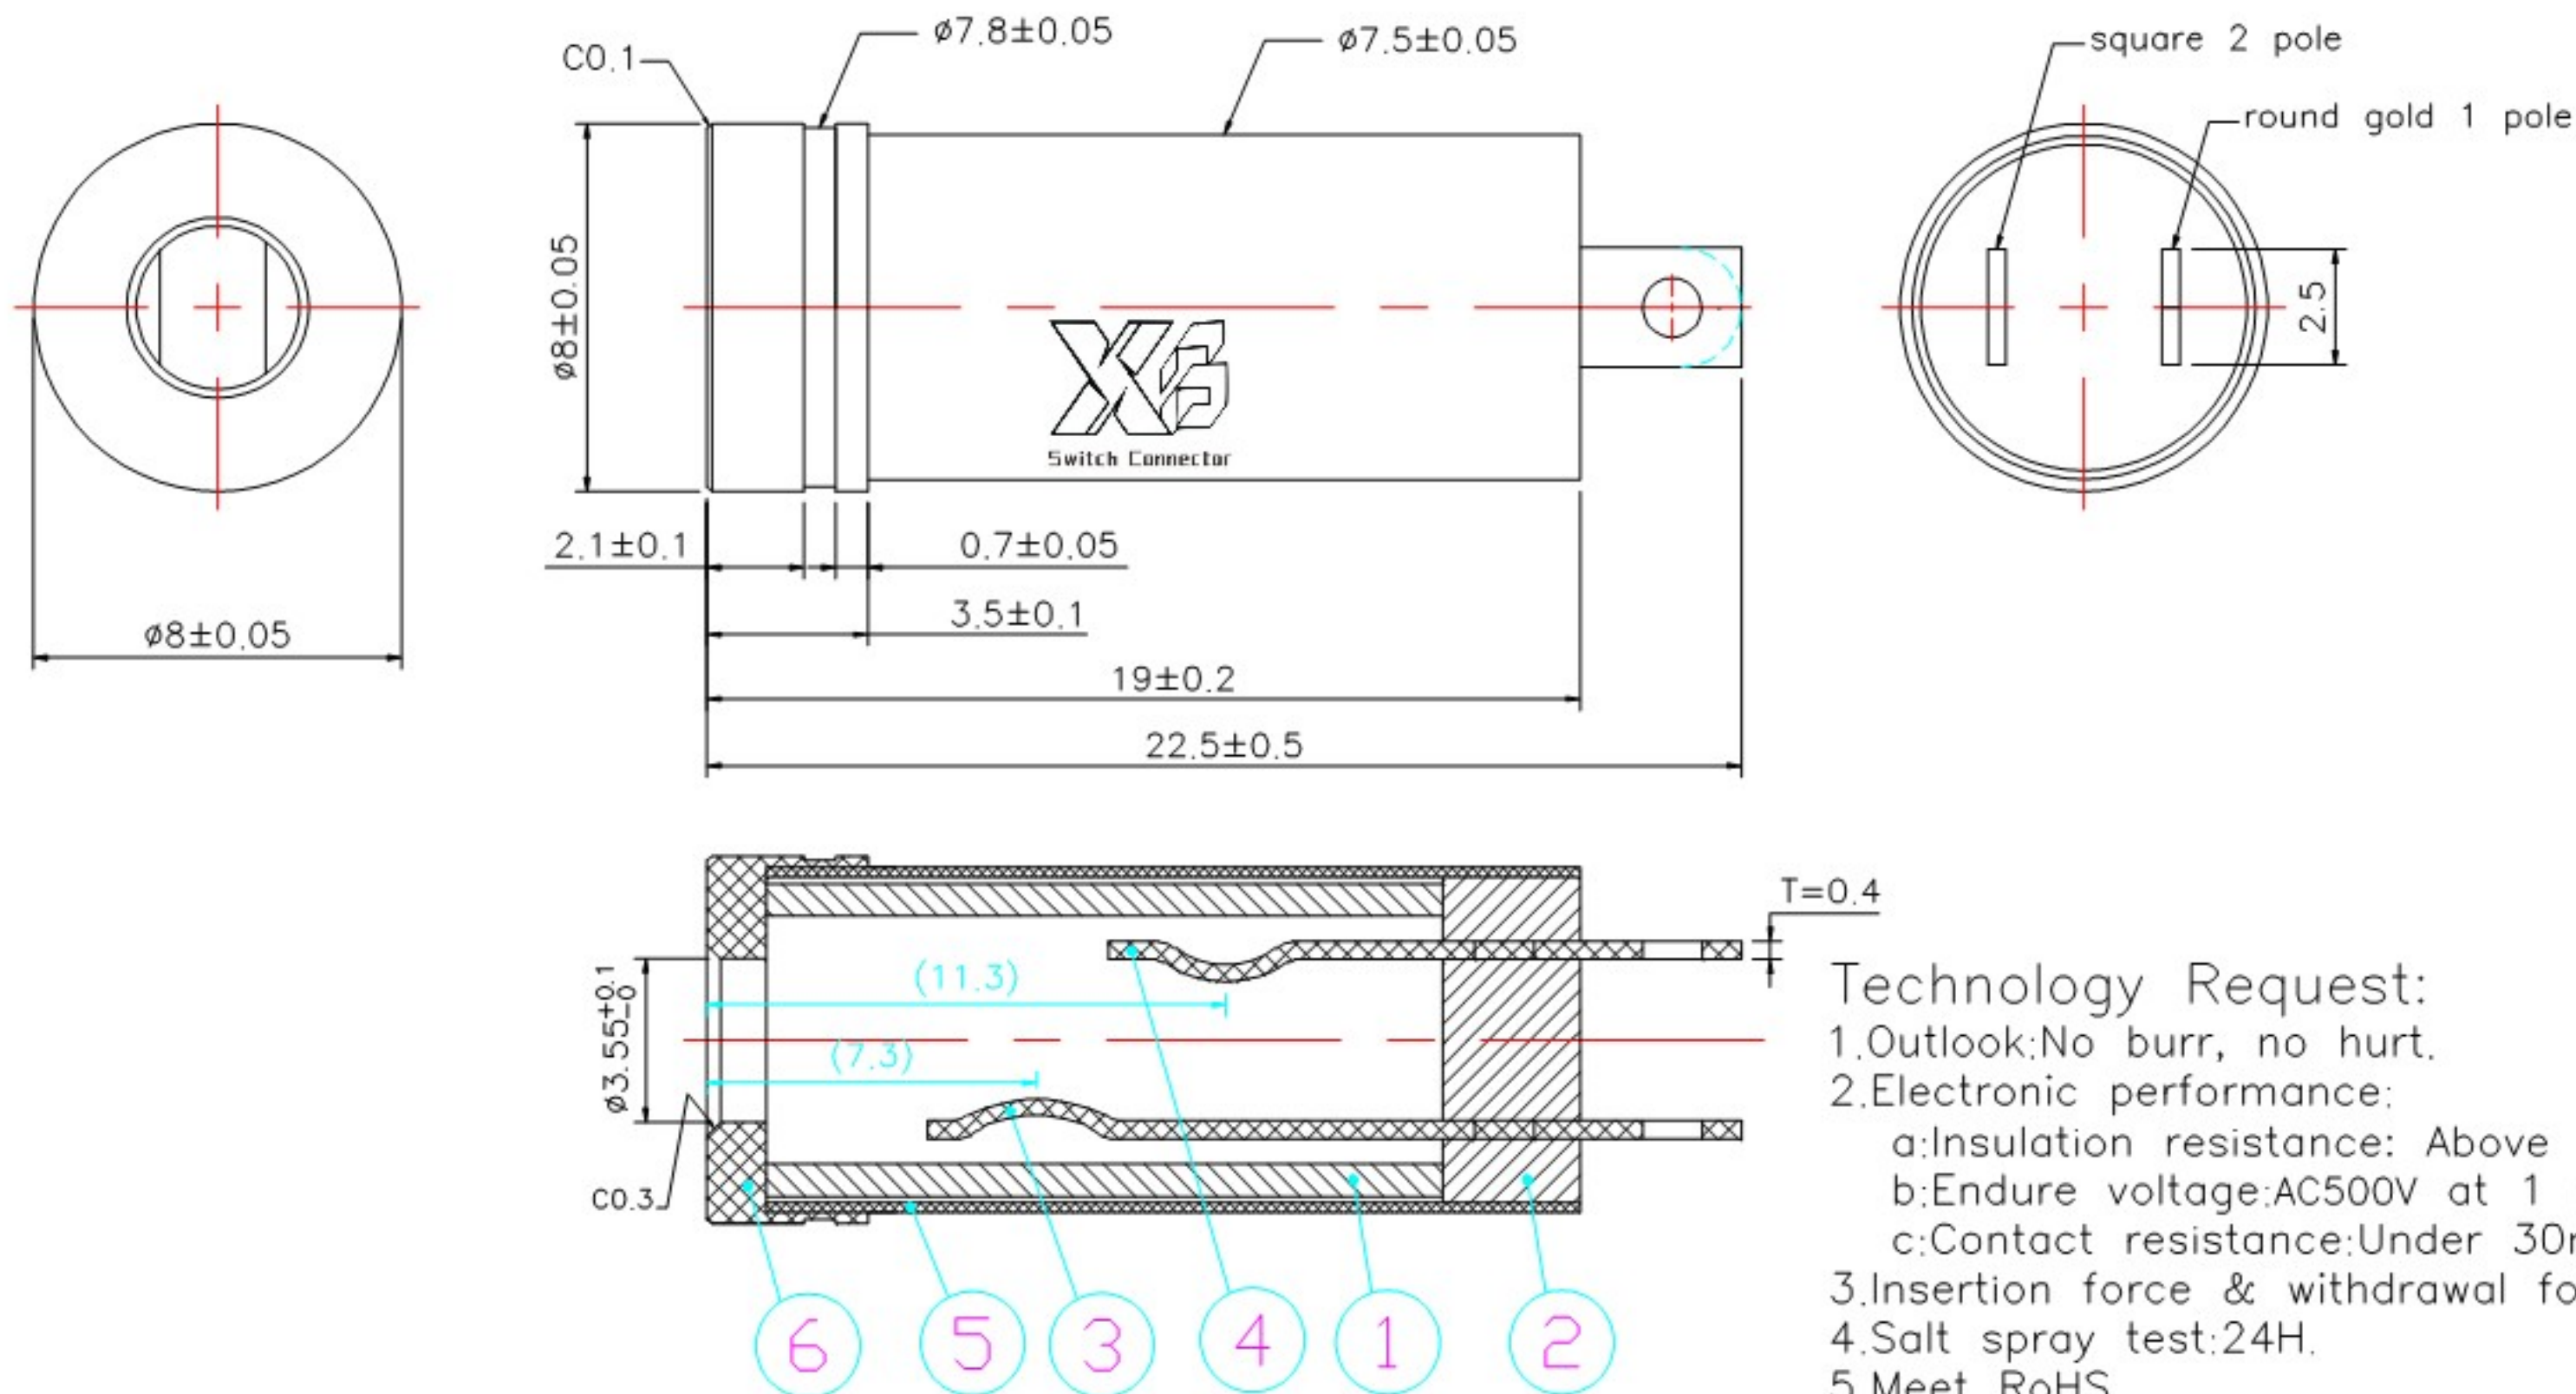

Technology Request:

- 1.Outlook:No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance: Above DC500V/100MΩ;
 - b:Endure voltage:AC500V at 1 minute;
 - c:Contact resistance:Under 30mΩ;
- 3.Insertion force & withdrawal force:0.3-3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7	8*3.5 盖子	C3604	Ni 1-3um	核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	规格 DESCRIPTION:	3.5 AUDIO JACK $\phi 3.5 * \phi 8.0 * 22.5$
比例 Scale	5:1	xx.: ± 0.3	6	7.5*17.8*0.225 铜管	H65	Ni 1-3um				品名 P/N:	J35380
视图 Third angle projection		x.x.: ± 0.1	5	J35380 短片	C5191	Ni50u" Au1u"				图号 DRAWN NO:	CP-06-0036
		.xx.: ± 0.05	4	J35380 长片	C5191	Ni 1-3um					
			3	PLASTIC	PBT	WHITE					
			2	PLASTIC	POM	WHITE					
			1	PART	MATERIAL	PLATING					
			NO.								