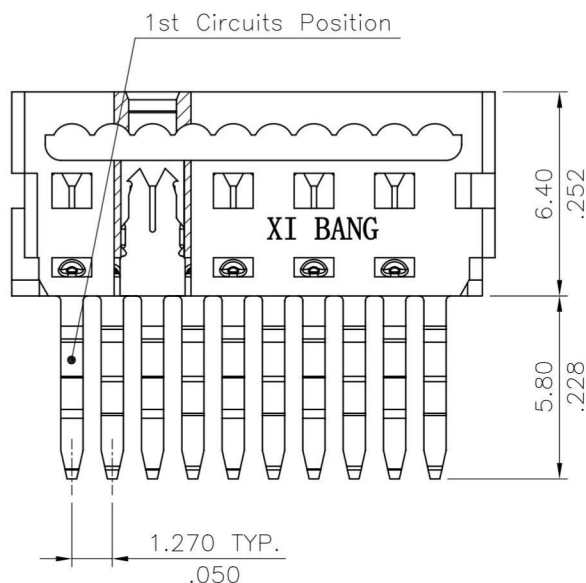
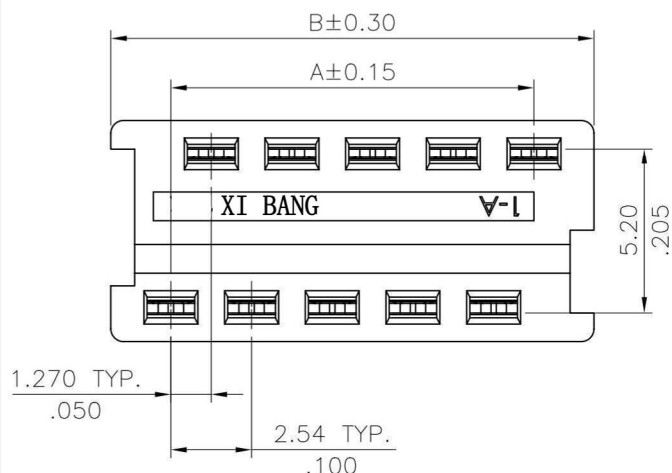


Material:

* Insulation:

Base: Glass filled polyester UL 94V-0

* Contact: Phosphor Bronze

Ordering Code:

CA34 ** P 1 0 00 - NH
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.:

② No. of Circuits: 04 to 26

③ Contacts Type: P= Pin Header

④ Plating option:

1= Matte Tin over Nickel plated

⑤ Color: 0= Nature



⑥ Option: 00= Standard (Tube Packing)

⑦ NH= For Lead Free IR Processes and Halogen-Free

DIM.A= 1.27 x No. of Spaces

DIM.B= DIM.A + 3.78

*Available in 4 ~ 26 Circuits

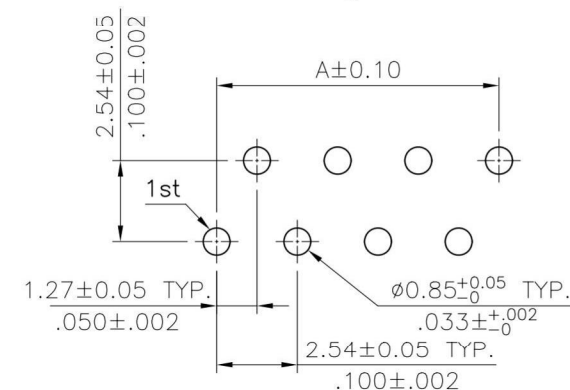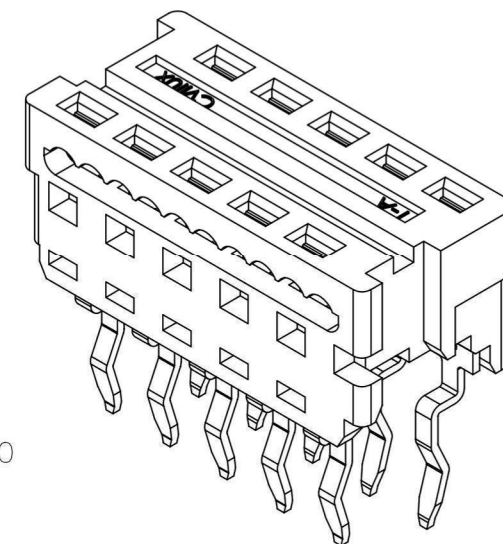

Recommended
P.C. Board Layout

Halogen-Free

RoHS Compliant

4					DATE	UNIT: mm / inch		TITLE: 1.27mm PICO-FLEX IDC PLUG Headers	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Clark	1/15-10'	TOLERANCE UNLESS OTHERWISE SPECIFIED .X ± 0.30/.012 X' ± 1' .XX ± 0.20/.008 X' ± .XXX ± 0.10/.004 XX' ±			MATERIAL:		
2				ENGINEER:	Clark	1/18-10'		FINISH:				
1				CHECKED BY:	Eisley	1/22-10'						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	1/22-10'			DRAWING NO.	CA3401SA	PART NO.	CA34**P1000-NH
									SCALE	4 / 1	SHEET	1 OF 1