




XB-MSK-008N-U

Model No.	X (mm)
Blank	2.0
A	4.0

SLIDER COLOR :

Black : B

White : W

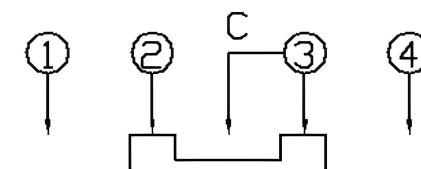





CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	100mA , 12V DC
Insulation Resistance	100MΩ Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100mΩ Max.
Operating Force	200 ± 70gf
Operating Life	10,000 cycles

E	TERMINAL	3	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	PHOSPHOR BRONZE	Ag plated
C	COVER	1	SUS	
B	BASE	1	PA	Black
A	SLIDER	1	PA	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

MAT'L		TITLE	SWITCH
FINISH		MODLE	SLIDE SWICTH
SCALE	1 : 1	DWG NO.	XB-MSK-008N-U
SHEET NO.	1 of 1	PART NO.	
			SIZE
			A4
			VER
			R

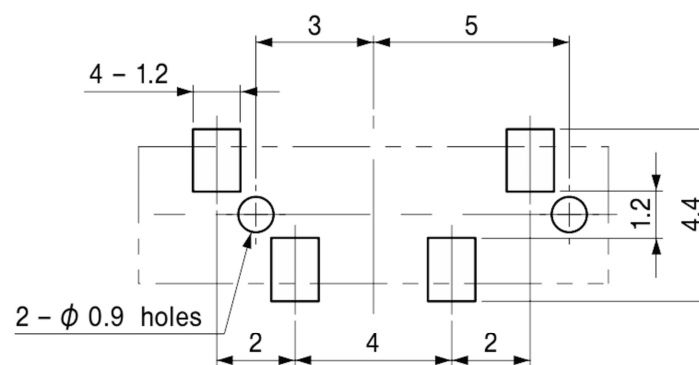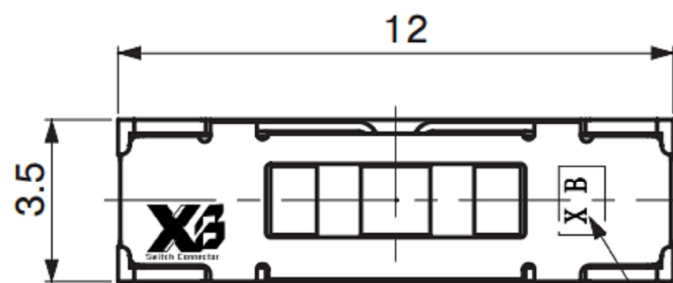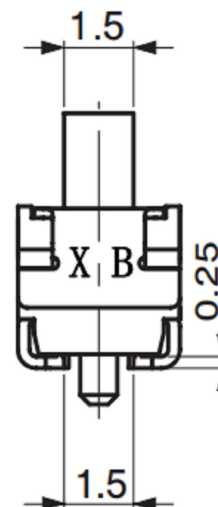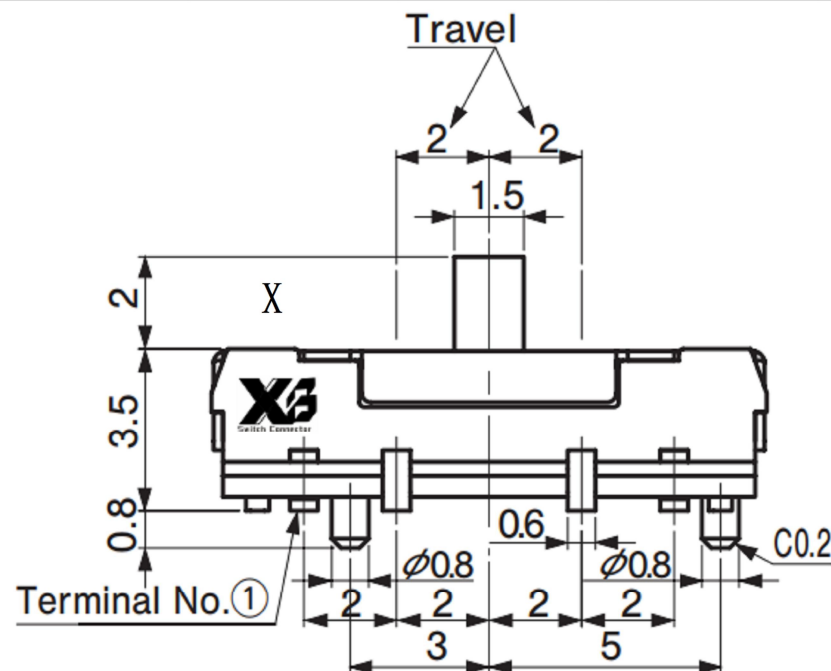

P.C.B LAND PATTERN

Production date code

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 09/09/21
DATE: 09/09/21
DATE: 09/09/21

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------