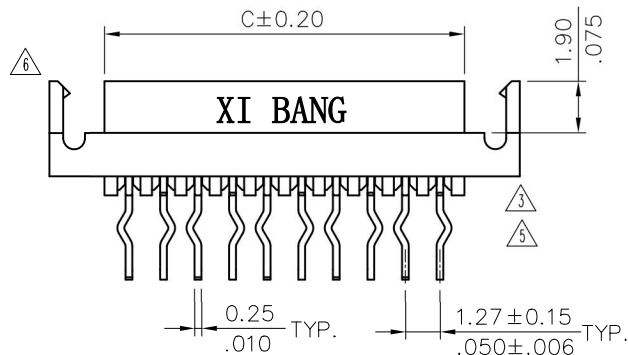
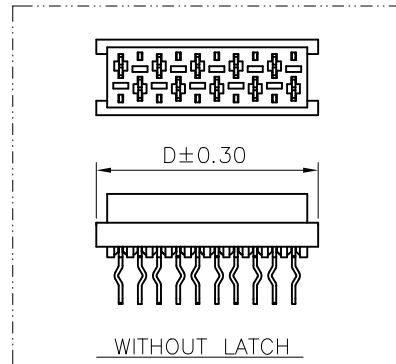
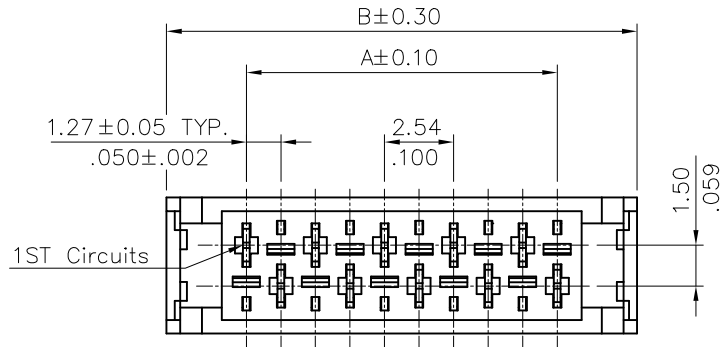


DIM.A= 1.27 x No. of Spaces
 DIM.B= DIM.A + 5.87
 DIM.C= DIM.A + 1.80
 DIM.D= DIM.A + 3.27

*Available in 4 ~ 26 Circuits

Material:

* Insulation:

Glass Filled Polyester UL 94V-0

* Contact: Phosphor Bronze

Ordering Code:

CA32 ** V 1 3 * *
 ① ② ③ ④ ⑤ ⑥ ⑦

① Series No.:

② No. of Circuits: 04 to 26

③ Contacts Type:
 V= Straight Type

④ Plating option:

1= Tin over Nickel plated
 (Matte Tin Plated)


⑤ Color: 3= Red

⑥ Option: 0=Tube Packing
 R=Tape & Reel Packing

⑥ Other Option:

0= Without Latch

L= With Latch



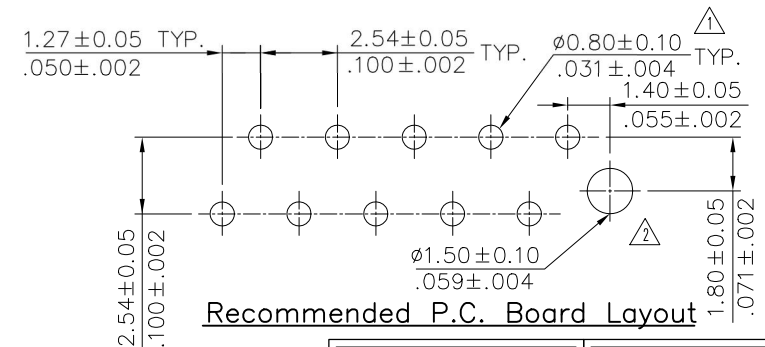


Recommended P.C. Board Layout

Lead Free Process

RoHS Compliant

⑥	Sun	3/11-16'	ECRT116009/ECNT116035		DATE	UNIT: mm / inch	TITLE: 1.27mm Pitch Female	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
⑤	Sandy	12/20-07	ECN07540	DRAWN BY: Sun	3/14-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED	Top entry DIP Type Connector				
④	Sandy	11/20-07	ECN07473/ECR07081-1	ENGINEER: Sun	3/14-16'	.X ± 0.3/.012 X' ± 1"	MATERIAL:				
③	Sandy	10/04-07	ECN07378	CHECKED BY: Eisley	3/15-16'	.XX ± 0.2/.008 X' ±	FINISH:				
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	3/15-16'	.XXX ± 0.1/.004 X' ±			DRAWING NO. CA3202SG	PART NO. CA32**V13**	
									SCALE 4 / 1	SHEET 1 OF 2	

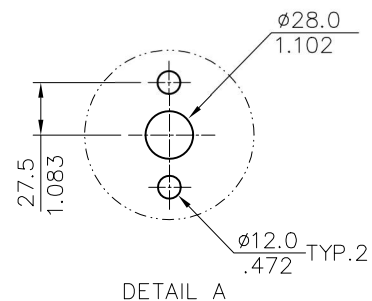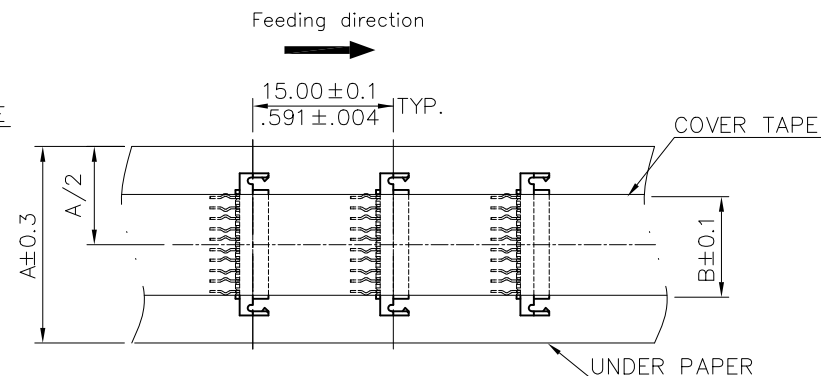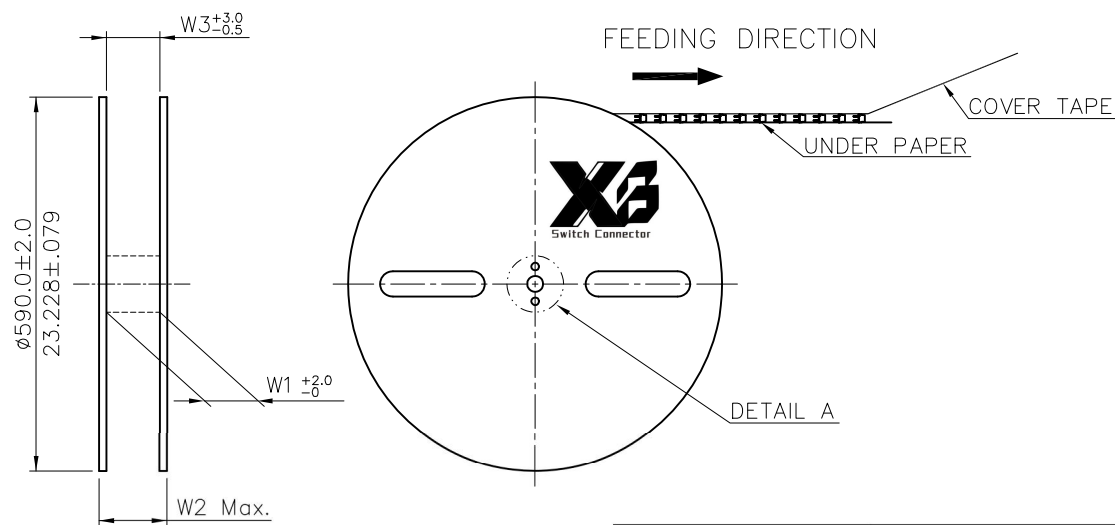

Circuits	Dimension				
	A	B	W1	W2	W3
4	11.0(.433)	6.0(.236)	13.0(.512)	23.0(.906)	13.0(.512)
6	17.0(.669)	6.0(.236)	18.0(.709)	28.0(1.102)	18.0(.709)
8	17.0(.669)	6.0(.236)	18.0(.709)	28.0(1.102)	18.0(.709)
10	21.0(.827)	6.0(.236)	22.0(.866)	32.0(1.260)	22.0(.866)
12	21.0(.827)	6.0(.236)	22.0(.866)	32.0(1.260)	22.0(.866)
14	24.0(.945)	6.0(.236)	25.0(.984)	35.0(1.378)	25.0(.984)
16	29.0(1.142)	6.0(.236)	30.0(1.181)	40.0(1.575)	30.0(1.181)
18	29.0(1.142)	6.0(.236)	30.0(1.181)	40.0(1.575)	30.0(1.181)
20	32.0(1.260)	6.0(.236)	33.0(1.299)	43.0(1.693)	33.0(1.299)
22	36.0(1.417)	6.0(.236)	37.0(1.457)	47.0(1.850)	37.0(1.457)
24	36.0(1.417)	6.0(.236)	37.0(1.457)	47.0(1.850)	37.0(1.457)
26	39.0(1.535)	6.0(.236)	40.0(1.575)	50.0(1.969)	40.0(1.575)

* Quantity : 2500 PCS/Reel/Caton

RoHS Compliant

△6	Sun	3/11-16'	ECRT116009/ECNT116035		DATE	UNIT: mm / inch	TITLE: TAPE & REEL PACKAGING FOR CA32 SERIES SMT TYPE	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
△5	Sandy	12/20-07	ECN07540	DRAWN BY:	Sun	3/14-16'					
△4	Sandy	11/20-07	ECN07473/ECR07081-1	ENGINEER:	Sun	3/14-16'	MATERIAL:	DRAWING NO.	CA3202SG	PART NO.	CA32**V13**
△3	Sandy	10/04-07	ECN07378	CHECKED BY:	Eisley	3/15-16'					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/15-16'	FINISH:	SCALE		SHEET	2 OF 2