

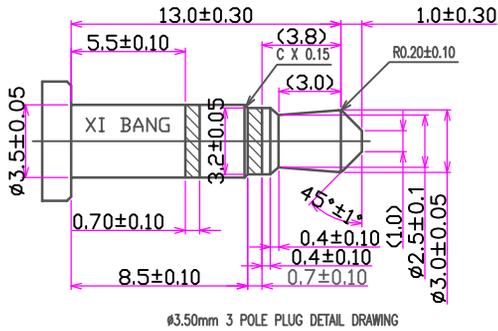
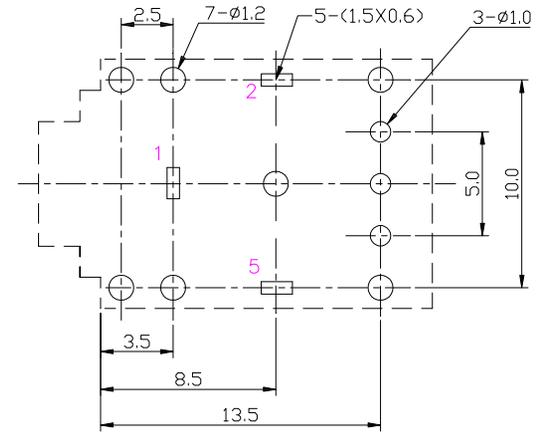
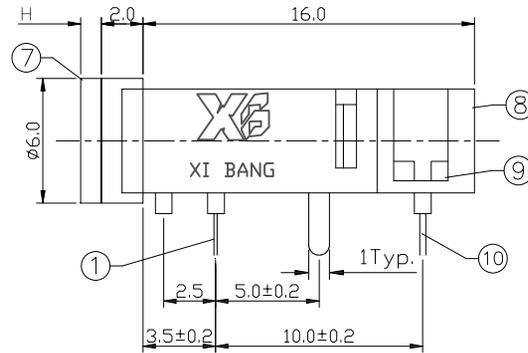


P. C. B LAYOUT
TOP VIEW

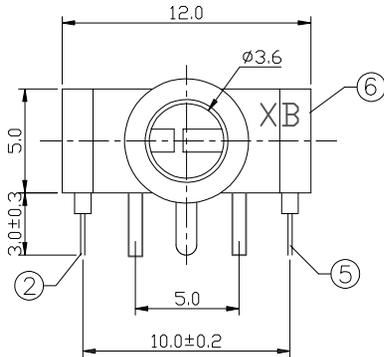

H	1.3
APPD.	

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $< 0.03\Omega$;
3. Insulation resistance: $> 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
10	CONTACT FOOT	3	H62 BRASS T=0.35	Ag-Plating
9	SWITCH COVER	1	PF	
8	SWITCH HOUSING	1	POM	
7	AXIS SUPPORT	1	H59 BRASS	Ni-Plating
6	HOUSING	1	PBT	
5	5# CONTACT FOOT	1	SUS301 T=0.25	Sn-Plating
4				
3				
2	2# CONTACT FOOT	1	SUS301 T=0.2	Sn-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE T=0.2	Sn-Plating

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1	
	PHONE JACK	XB-PJ-307A0-3单排	TOLERANCE	ANGLES	SCALE
			± 0.15	$\pm 1.5^\circ$	3:1
DESIGNER BY:	Gao. Peng	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			
CHECK BY:	He. Long. Fei				
APPROVED BY:	Pang. Dong				