
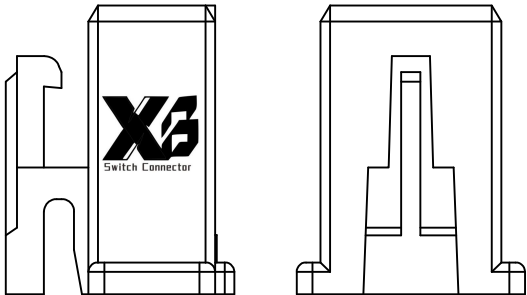


Material:
Nylon 66 UL 94V-0, Color Nature


Ordering Code

CI30 ** S L000-A
① ② ③ ④


- ① Series No.
- ② No. of Circuits:
- ③ S= Connector housing
- ④ Other option: L000-A= Locking Latch

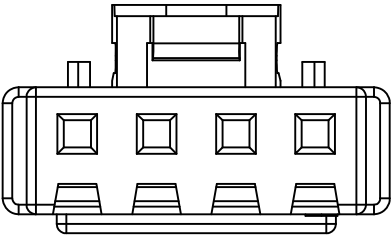

2-3P

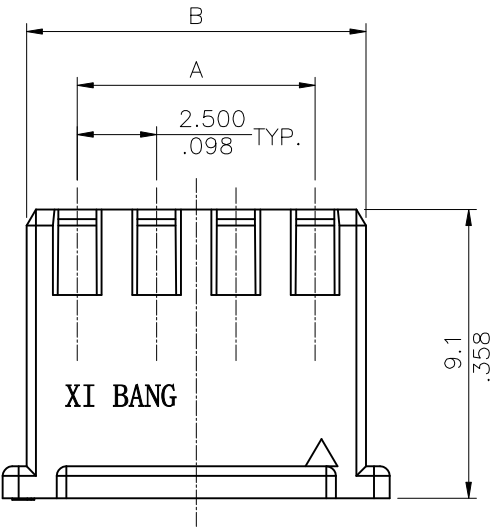

4~16P

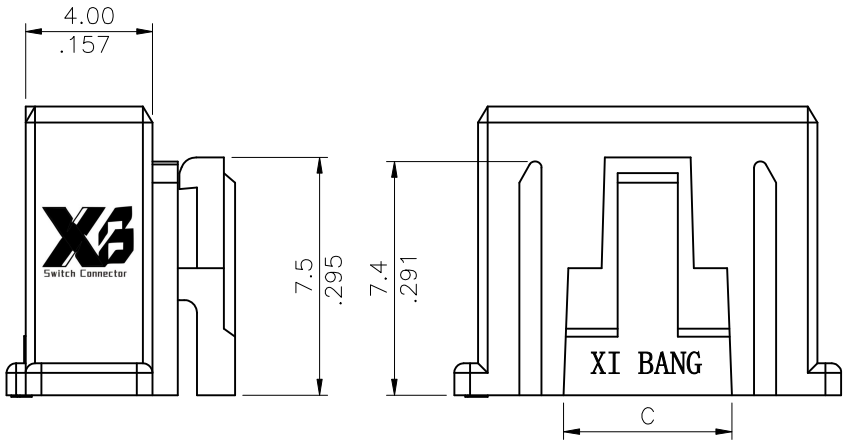

Circuits	Dimension		
	A	B	C
2	2.50 (.098)	5.85 (.230)	3.0 (.118)
3	5.00 (.197)	8.35 (.329)	3.0 (.118)
4	7.50 (.295)	10.85 (.427)	5.3 (.209)
5	10.00 (.394)	13.35 (.526)	6.5 (.256)
6	12.50 (.492)	15.85 (.624)	6.5 (.256)
7	15.00 (.591)	18.35 (.722)	11.5 (.453)
8	17.50 (.689)	20.85 (.821)	14.0 (.551)
9	20.00 (.787)	23.35 (.919)	14.0 (.551)
10	22.50 (.886)	25.85 (1.018)	14.0 (.551)
11	25.00 (.984)	28.35 (1.116)	14.0 (.551)
12	27.50 (1.083)	30.85 (1.215)	14.0 (.551)
13	30.00 (1.181)	33.35 (1.313)	14.0 (.551)
14	32.50 (1.280)	35.85 (1.411)	14.0 (.551)
15	35.00 (1.378)	38.35 (1.510)	14.0 (.551)
16	37.50 (1.476)	40.85 (1.608)	14.0 (.551)

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 2.50mm(.098")	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
③				DRAWN BY:	Karen	10/28-19'	CRIMP TERMINAL HOUSING				
②				ENGINEER:	Sun	10/30-19'	MATERIAL:	DRAWING NO.	CI3014SA	PART NO.	CI30**SL000-A
①				CHECKED BY:	Eisley	10/30-19'					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	10/30-19'	FINISH:	SCALE	4 / 1	SHEET	1 OF 1