
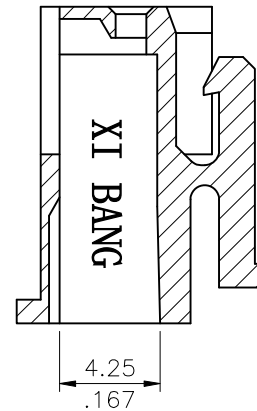
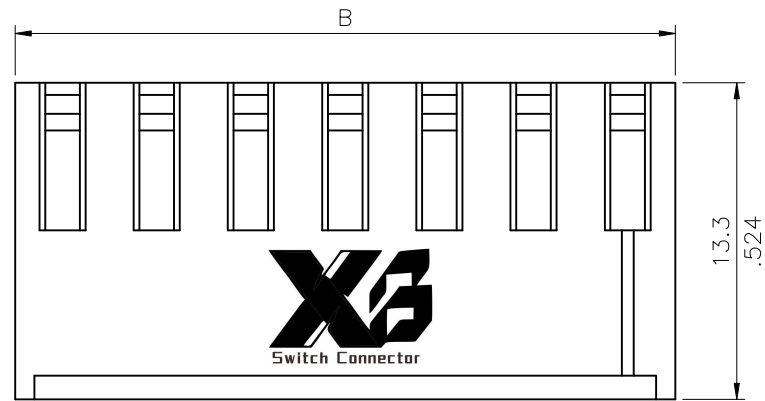


Material: Nylon 66 UL 94V-0
Color Nature

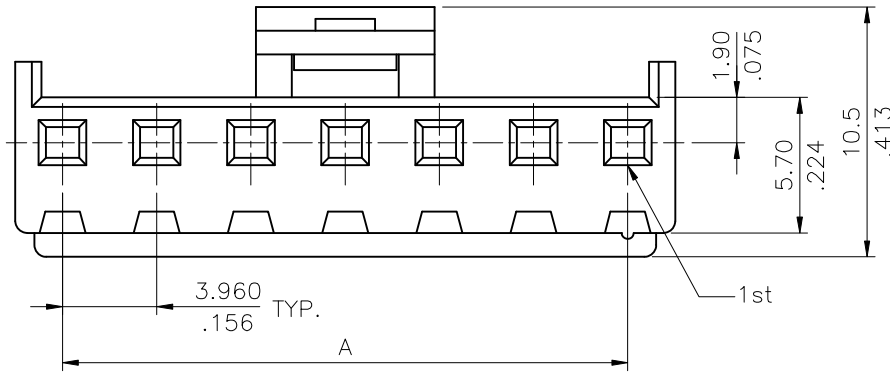

Ordering Code:


CI52 ** S 0000
① ② ③ ④

- ① Series No.
- ② No. of Circuits
- ③ S= Connector housing
- ④ Other option: 0000= Standard

Circuits	Dimension	
	A	B
2	3.96(.156)	8.1(.319)
3	7.92(.312)	12.1(.476)
4	11.88(.468)	15.8(.622)
5	15.84(.624)	19.8(.780)
6	19.80(.780)	23.8(.937)
7	23.76(.935)	27.7(1.091)
8	27.72(1.091)	31.7(1.248)
9	31.68(1.247)	35.6(1.402)
10	35.64(1.403)	39.6(1.559)
11	39.60(1.559)	43.6(1.717)
12	43.56(1.715)	47.5(1.870)

Halogen-Free

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 3.96MM(.156") CRIMP TERMINAL HOUSING	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.
③				DRAWN BY: Sun	9/2-22'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②				ENGINEER: Sun	9/2-22'	.X ± 0.38 / .015 X' ± 1'	FINISH:	
①	Sun	9/02-22'	ECNT122167	CHECKED BY: Eisley	9/5-22'	.XX ± 0.25 / .010 .X' ±		DRAWING NO. CI5201SC PART NO. CI52**S0000
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	9/5-22'	.XXX ± 0.10 / .004 .XX' ±	SCALE 3 / 1	SHEET 1 OF 1

Notes:




1. Material:

Insulation: Nylon 6 UL 94V-2 Color Nature

⚠ 2. Glow wire requirement:

IEC 60695-2-12 GWFI 960°C@0.38mm & 930°C@0.75mm & 960°C@1.50mm & 960°C@3.00mm

IEC 60695-2-11 GWEPT 750°C ≤2S

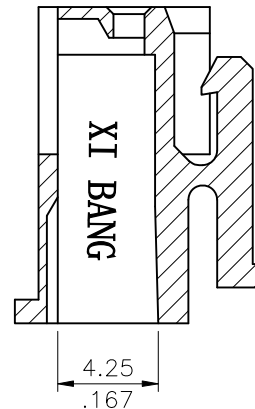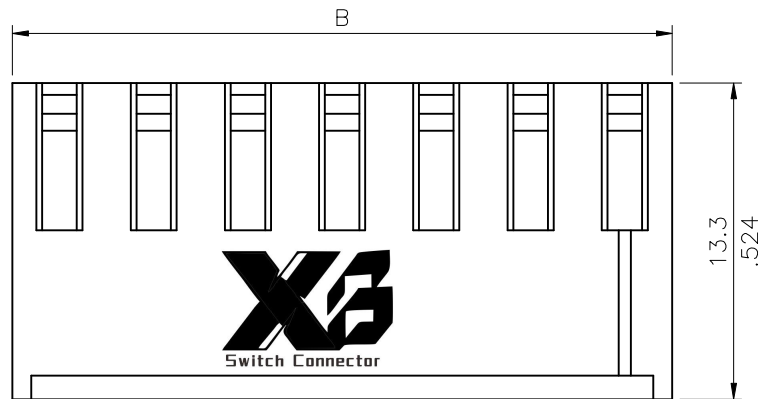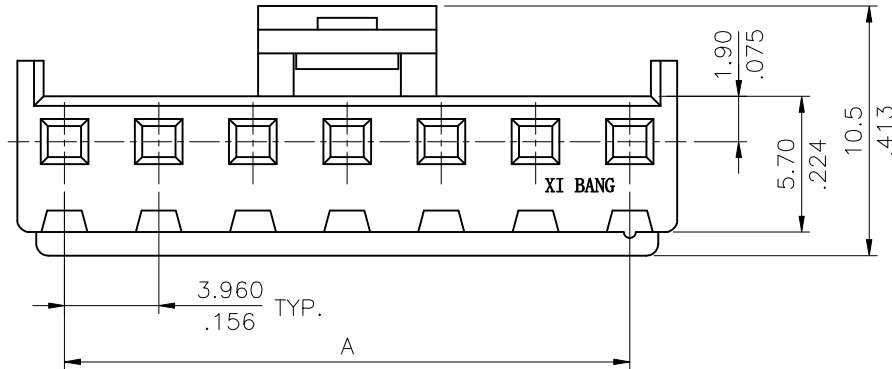

Ordering Code:

CI52 ** S 000M
 ① ② ③ ④

① Series No.

② No. of Circuits

③ S=Connector housing


④ Other option: 000M= Standard




(Glow wire available)

Circuits	Dimension	
	A	B
2	3.96(.156)	8.1(.319)
3	7.92(.312)	12.1(.476)
4	11.88(.468)	15.8(.622)
5	15.84(.624)	19.8(.780)
6	19.80(.780)	23.8(.937)
7	23.76(.935)	27.7(1.091)
8	27.72(1.091)	31.7(1.248)
9	31.68(1.247)	35.6(1.402)
10	35.64(1.403)	39.6(1.559)
11	39.60(1.559)	43.6(1.717)
12	43.56(1.715)	47.5(1.870)



RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 3.96MM(.156") CRIMP TERMINAL HOUSING	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.
③				DRAWN BY: Sun	9/8-22'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②	Sun	9/02-22'	ECNT122167	ENGINEER: Sun	9/8-22'	.X ± 0.38 / .015 X' ± 1"	FINISH:	DRAWING NO. CI5266SC PART NO. CI52**S000M
①	Kenny	8/26-20'	ECNT120227	CHECKED BY: Eisley	9/13-22'	.XX ± 0.25 / .010 X' ±		SCALE 3 / 1 SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	9/13-22'	.XXX ± 0.10 / .004 XX' ±		

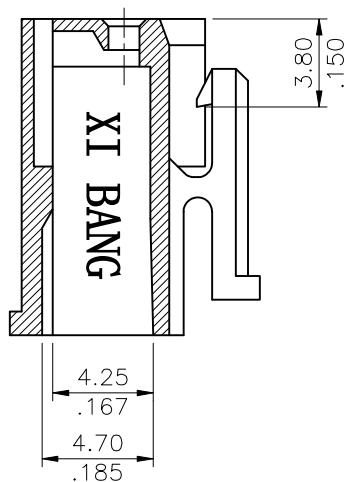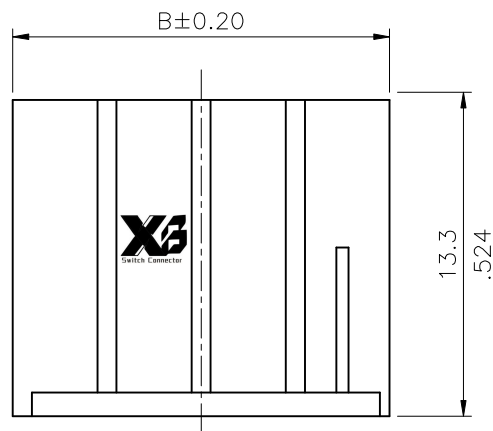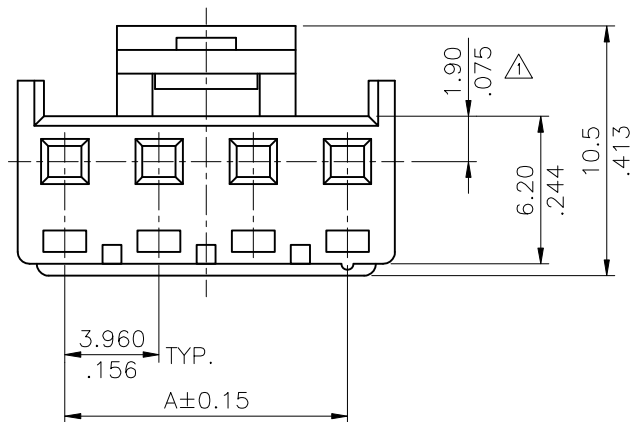

MATERIAL: NYLON 66 UL 94V-0
COLOR NATURE

CIRCUITS	DIM. A	DIM. B
2	3.96(.156)	7.92(.312)
3	7.92(.312)	11.88(.468)
4	11.88(.468)	15.84(.634)

Ordering Code:

CI52 ** S M000
① ② ③ ④

- ① Series No.
- ② No. of Circuits
- ③ S=Connector housing
- ④ Other option: M000= High voltages type

Halogen-Free

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch
4						TITLE: 3.96MM(.156") CRIMP TERMINAL HOUSING
3				DRAWN BY: Sun	8/22-22'	TOLERANCE UNLESS OTHERWISE SPECIFIED
2				ENGINEER: Sun	8/22-22'	.X ± 0.30/.012 X' ± 1'
1	Sun	8/22-22'	ECNT122156	CHECKED BY: Eisley	8/25-22'	.XX ± 0.20/.008 X' ±
				APPROVED BY: Eisley	8/25-22'	.XXX ± 0.10/.004 .XX' ±

MATERIAL:	
FINISH:	



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DRAWING NO.	CI5204SB	PART NO.	CI52**SM000
SCALE	3 / 1	SHEET	1 OF