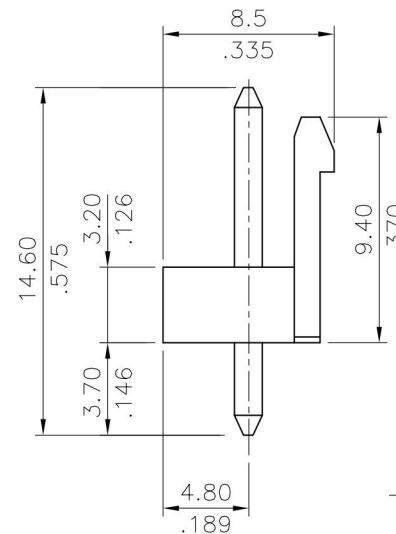
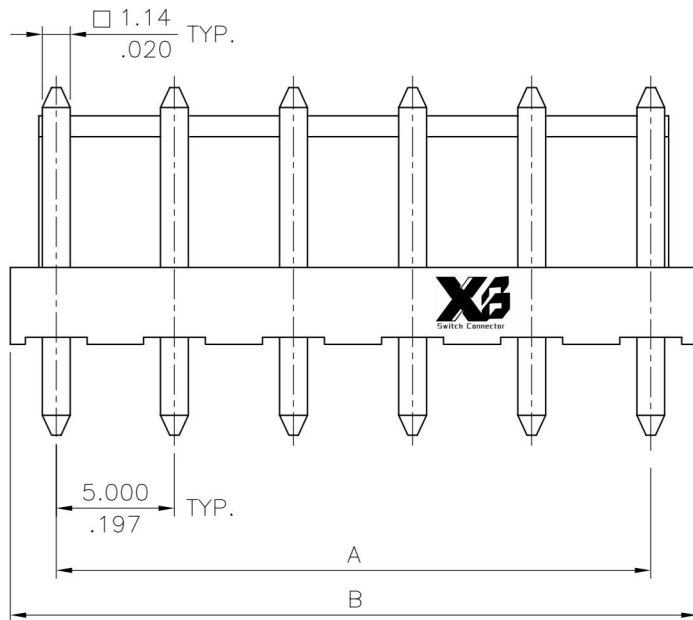


Material:

* Insulation: Nylon 66 UL 94V-0
Color Nature

* Contact: Brass

Circuits	Dimension	
	A	B
2	5.00(.197)	9.9(.390)
3	10.00(.394)	14.9(.587)
4	15.00(.591)	19.9(.783)
5	20.00(.787)	24.9(.980)
6	25.00(.984)	29.9(1.177)
7	30.00(1.181)	34.9(1.374)
8	35.00(1.378)	39.9(1.571)
9	40.00(1.575)	44.9(1.768)
10	45.00(1.772)	49.9(1.965)
11	50.00(1.969)	54.9(2.161)
12	55.00(2.165)	59.9(2.358)

Halogen-Free

Tin-Lead Process

RoHS Compliant

Recommended P.C. Board Layout

4					DATE	UNIT: mm / inch	TITLE: 5.00MM(.197") STRAIGHT HEADERS	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Sandy	08/13-96'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2				ENGINEER:	David	08/13-96'	.X ± 0.38 / .015 X' ± 1"	DRAWING NO. CI7501SA PART NO. CI75**P1V00			
1				CHECKED BY:	Alex	08/14-96'	.XX ± 0.25 / .010 .X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	08/14-96'	.XXX ± 0.15 / .006 .XX' ±	SCALE 3 / 1 SHEET 1 OF 1			