
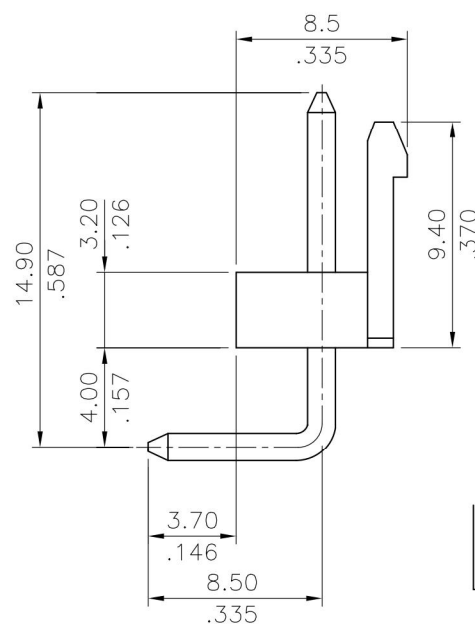
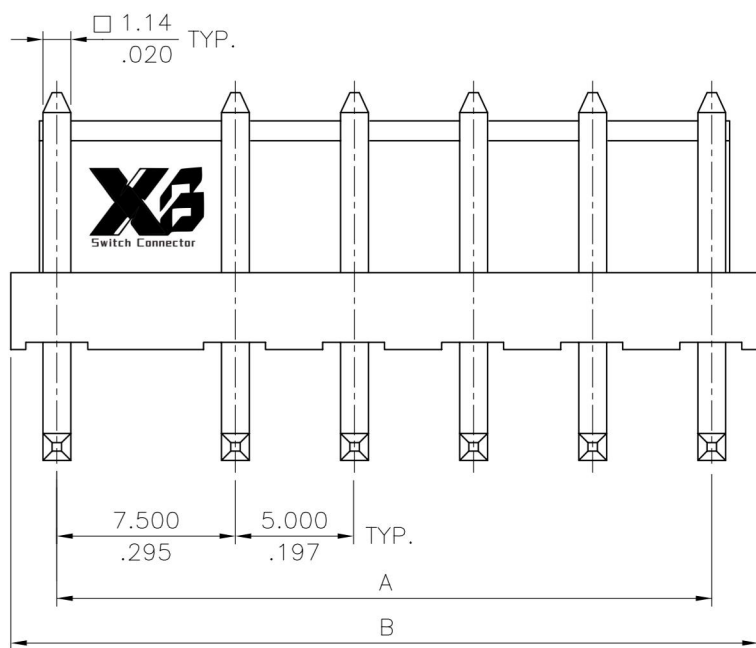


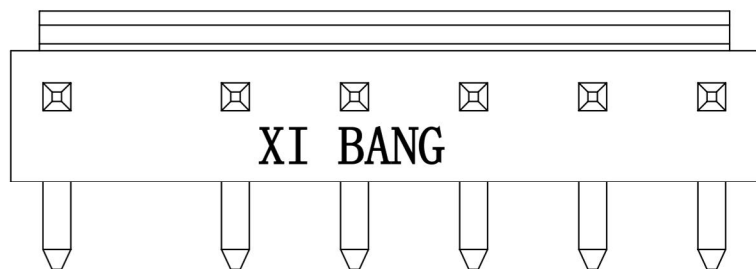


Material:

* Insulation: Nylon 66 UL 94V-0
Color Nature

* Contact: Brass

Circuits	Dimension	
	A	B
2	7.50(.295)	12.4(.488)
3	12.50(.492)	17.4(.685)
4	17.50(.689)	22.4(.882)
5	22.50(.886)	27.4(1.079)
6	27.50(1.083)	32.4(1.276)
7	32.50(1.280)	37.4(1.472)
8	37.50(1.476)	42.4(1.669)
9	42.50(1.673)	47.4(1.866)
10	47.50(1.870)	52.4(2.063)
11	52.50(2.067)	57.4(2.260)
12	57.50(2.264)	62.4(2.457)

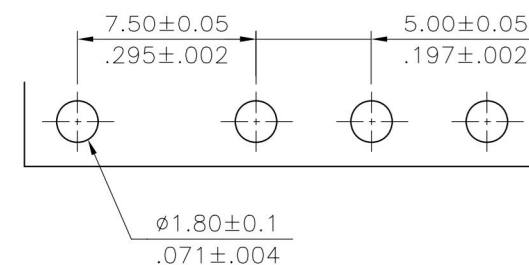

Halogen-Free

Tin-Lead Process

RoHS Compliant

Recommended P.C. Board Layout

4					DATE	UNIT: mm / inch	TITLE: 7.50-5.00MM(.295"-.197") RIGHT ANGLE HEADERS	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Sandy	08/15-96'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2				ENGINEER:	David	08/15-96'	.X ± 0.38 / .015 X" ± 1"	DRAWING NO. CI7602SA PART NO. CI76**P1H00			
1				CHECKED BY:	Alex	08/16-96'	.XX ± 0.25 / .010 .X" ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	08/16-96'	.XXX ± 0.15 / .006 .XX" ±	SCALE 3 / 1 SHEET 1 OF 1			