

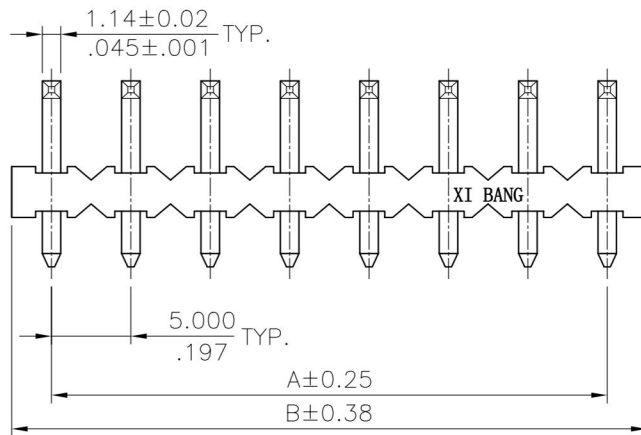
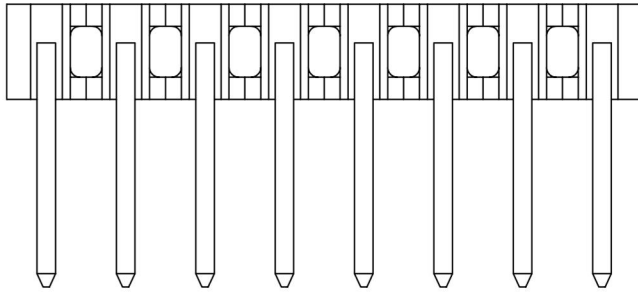




A = 5.00 * No. of Spaces

B = A + 5.00

* Available in 2 through 20 circuits

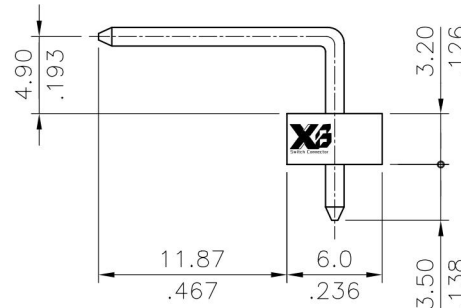

Material:

* Insulation: Glass filled polyester UL 94V-0

* Contact: Brass

Ordering Code:

CI78 ** P 1 H 00
① ② ③ ④ ⑤ ⑥

① Series No.

CI78= 5.0mm center spacing

② No. of Circuits

③ Contact type: P= Pin header

④ Plating option:

1= 3.05μm(120μ") Min. Tin
over 0.76μm(30μ") Nickel

2= Gold flash plated over
1.27μm(50μ") Nickel

3= 0.38μm(15μ") Gold plated
over 1.27μm(50μ") Nickel

4= 0.76μm(30μ") Gold plated
over 1.27μm(50μ") Nickel

⑤ Tail Style: H= Right angle

⑥ Option: 00= Color White(Nature)

Recommended P.C. Board Layout

Tin-Lead Process

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 5.00MM(.197")	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
3				DRAWN BY:	Betty	09/28-01'	BOARD MOUNT PIN HEADER			
2				ENGINEER:	David	09/28-01'	MATERIAL:	DRAWING NO.	CI7802SC	PART NO.
1				CHECKED BY:	David	09/28-01'				
SYMBOL	NAME	DATE	REVISIONS	APPROVED BY:	Alex	09/28-01'	FINISH:	SCALE	2 / 1	SHEET 1 OF 1
						TOLERANCE UNLESS OTHERWISE SPECIFIED				
						.X ± 0.38/.015	X' ± r			
						.XX ± 0.25/.010	.X' ±			
						.XXX ± 0.10/.004	.XX' ±			