
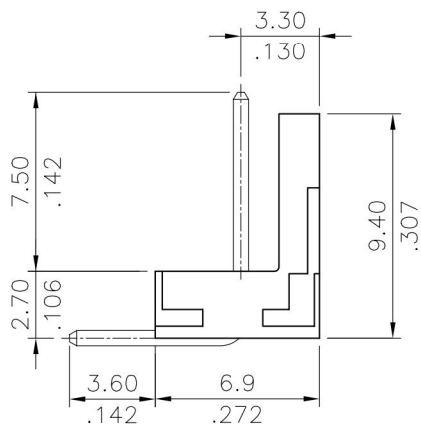
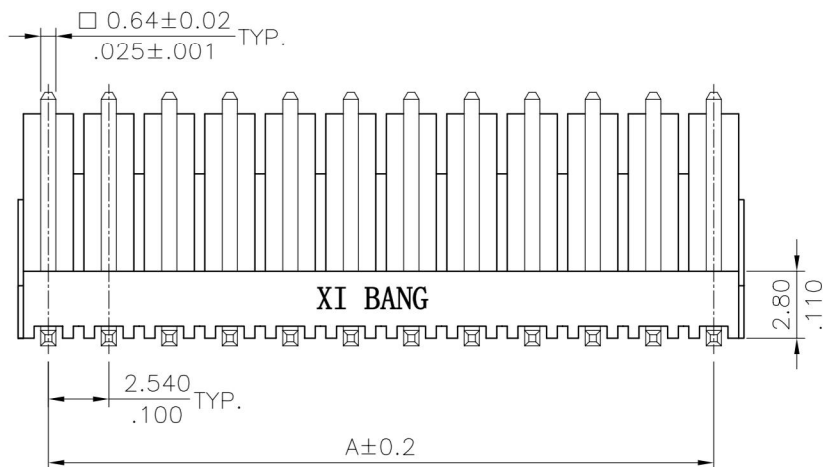


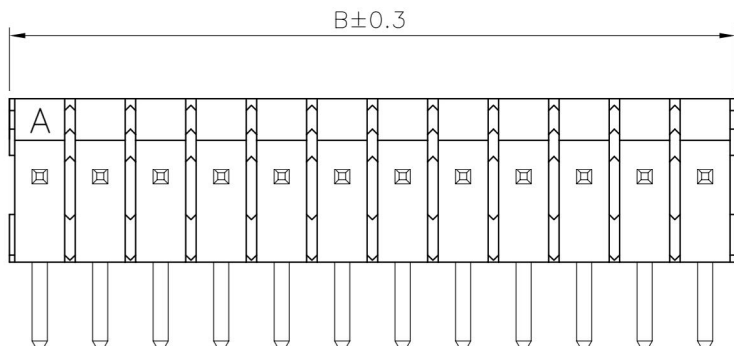

Material:

* Insulation: Glass filled polyester UL 94V-0
Color White(Nature)

* Contact: Brass

Ordering Code:

CI83 ** P * H OL
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits

③ Contact type: P= Pin header

④ Plating option:

1= 3.05μm(120μ") Min. Tin
over 0.76μm(30μ") Nickel

2= Gold flash plated over
1.27μm(50μ") Nickel

3= 0.38μm(15μ") Gold plated
over 1.27μm(50μ") Nickel

4= 0.76μm(30μ") Gold plated
over 1.27μm(50μ") Nickel


⑤ Tail Style: H= Right angle

⑥ Option: OL= Without Locking Ramp

A = 2.54 x No. of Spaces

B = A + 2.54

* Available in 2 through 36 circuits

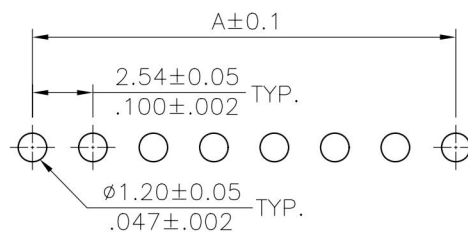

Recommended P.C. Board Layout

Tin-Lead Process

RoHS Compliant

4					DATE	UNIT: mm / inch		TITLE: 2.54MM(.100") RIGHT ANGLE HEADER	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY: Jim	03/13-06'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:		
2				ENGINEER: Eisley	03/20-06'	.X ± 0.30/.012	X" ± 1"	FINISH:				
1	Jim	3/13/06'	ECN06083/ECR06013-1	CHECKED BY: David	03/20-06'	.XX ± 0.20/.008	.X" ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	03/20-06'	.XXX ± 0.10/.004	.XX" ±		DRAWING NO.	CI8303SD	PART NO.	CI83**P*HOL
									SCALE	3 / 1	SHEET	1 OF 1