

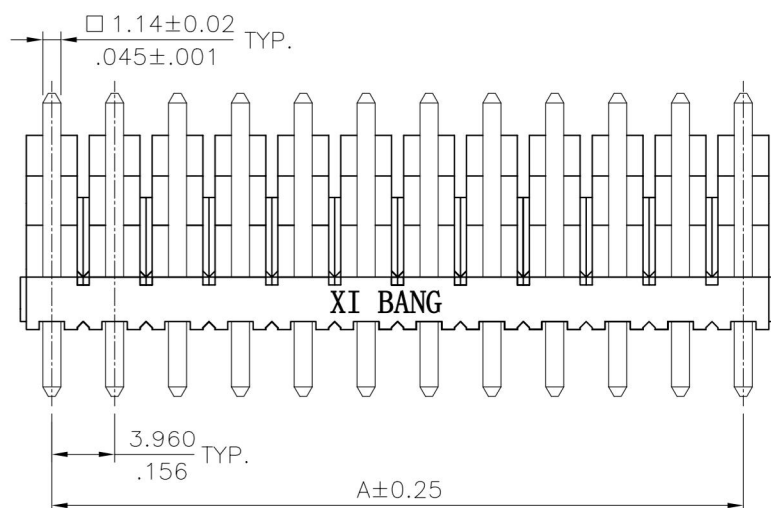
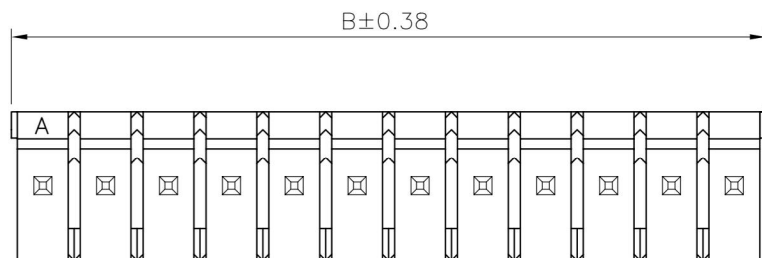


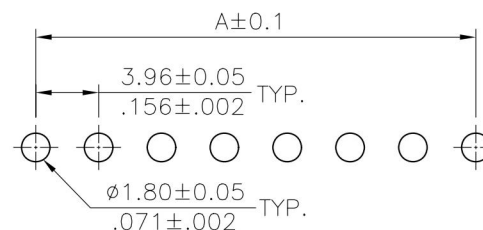

A = 3.96 x No. of Spaces

B = A + 3.96

* Available in 2 through 24 circuits

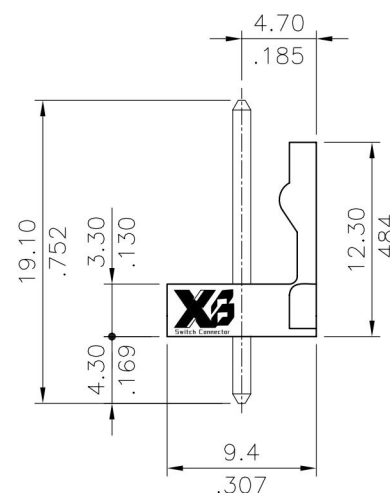

Recommended P.C. Board Layout

Material:

* Insulation: Glass filled polyester UL 94V-0

Color White(Nature)

* Contact: Brass

Ordering Code:

CI82 ** P * V 00
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits

③ Contact type: P= Pin header

④ Plating option:

1= 3.05μm(120μ") Min. Tin
over 0.76μm(30μ") Nickel

2= Gold flash plated over
1.27μm(50μ") Nickel

3= 0.38μm(15μ") Gold plated
over 1.27μm(50μ") Nickel

4= 0.76μm(30μ") Gold plated
over 1.27μm(50μ") Nickel

⑤ Tail Style: V= Straight

⑥ Option: 00= Standard

Tin-Lead Process

RoHS Compliant

4						DATE	UNIT: mm / inch	TITLE: 3.96MM(.156") STRAIGHT DIP HEADER	 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Sun	11/02-04'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2				ENGINEER:	Eisley	11/04-04'	.X ± 0.38/.015	X' ± 1"		MATERIAL:		
1	SUN	9/30/03'	ECN03330/ECR03030-0	CHECKED BY:	David	11/04-04'	.XX ± 0.25/.010	.X" ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	11/04-04'	.XXX ± 0.10/.004	.XX" ±		FINISH:		
									DRAWING NO.	CI8201SD	PART NO.	CI82**P*V00
									SCALE	2 / 1	SHEET	1 OF 1