

Notes :

- * Body: High temperature plastic UL 94V-0, Color Nature
- * Cover: High temperature plastic UL 94V-0, Color Black
- * Contact: Phosphor Bronze
- * For Lead-Free IR Reflow process

Ordering Code

CF79 21 Z U 0 R 0 -NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② No. of Circuits

③ Plating code:

Z= 2.0u"Gold plated over 1.27um(50u")min.Nickel






④ Contact style: U= Upside contact

⑤ Color: 0= Nature


⑥ Packing option: R0= Tape & Reel

⑦ Other option:

-NH= For Lead Free IR Processes

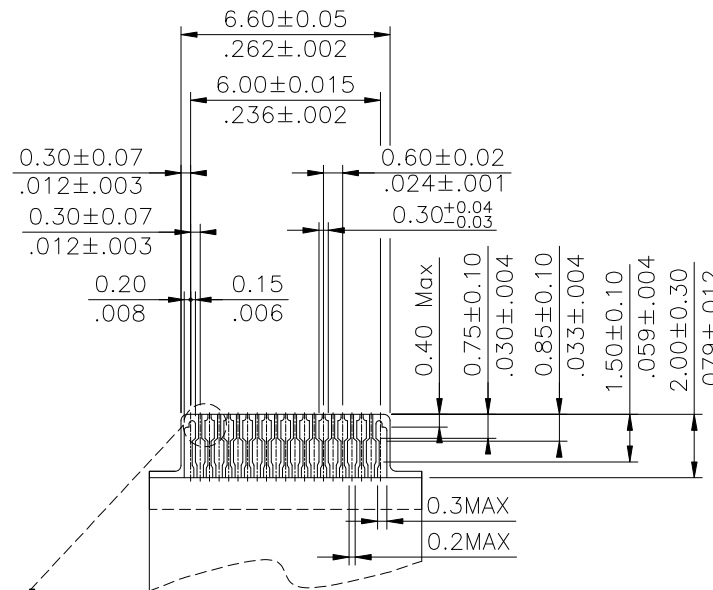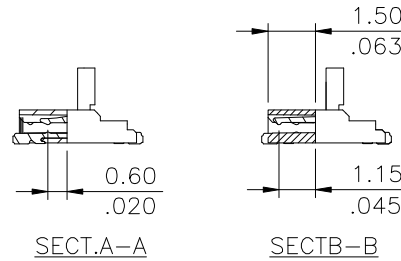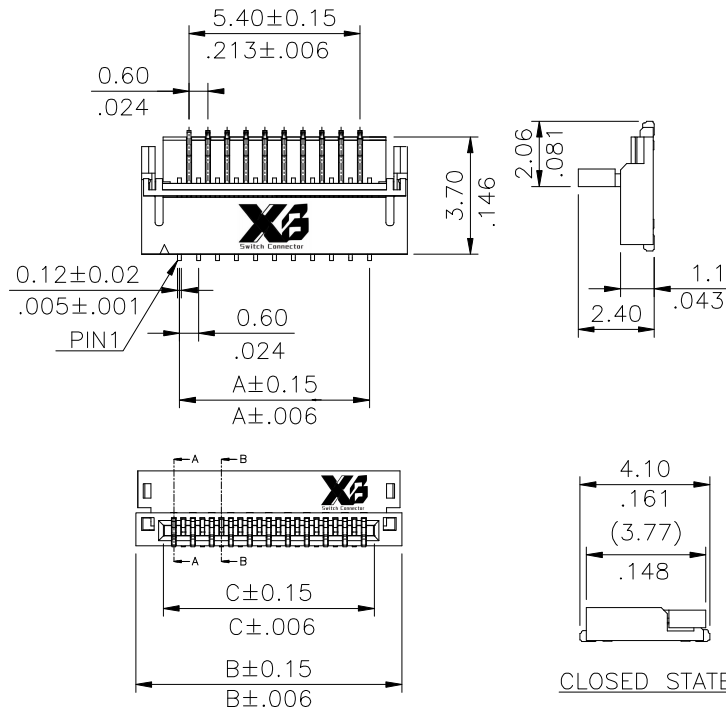

Accommodated FFC/FPC
Thickness= 0.20±0.03mm

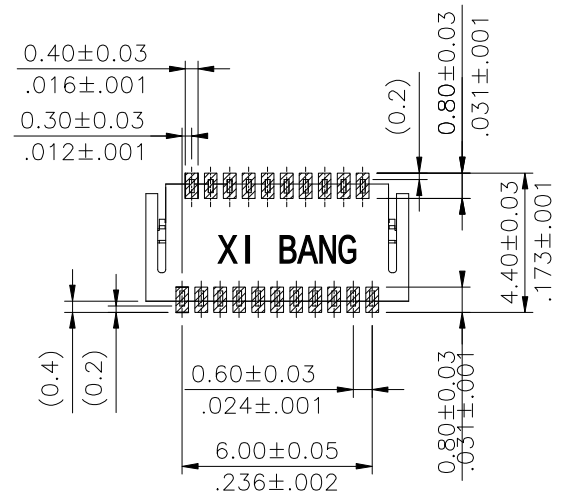

P.C. Board Layout

Circuits (N)	Dimension		
	A	B	C
21	6.0(.236)	8.4(.331)	6.7(.263)

Lead Free Process



RoHS Compliant

4						UNIT: mm / inch	TITLE: 0.30mm(.012") ZIF FFC/FPC ONE-TOUCH CONNECTOR (1.1H Back-Flip)
3					DRAWN BY: yanxu	11/9-23'	
2					ENGINEER: yanxu	11/9-23'	MATERIAL:
1					CHECKED BY: Kevin	11/9-23'	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Phil	11/9-23'		FINISH:

DRAWING NO.	CF7901S2	PART NO.	CF79***U0R0-NH
SCALE	4 / 1	SHEET	1 OF 2



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

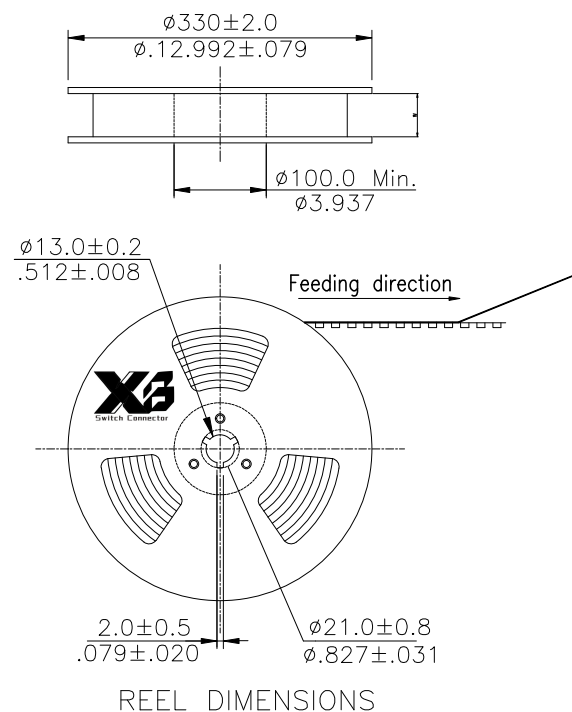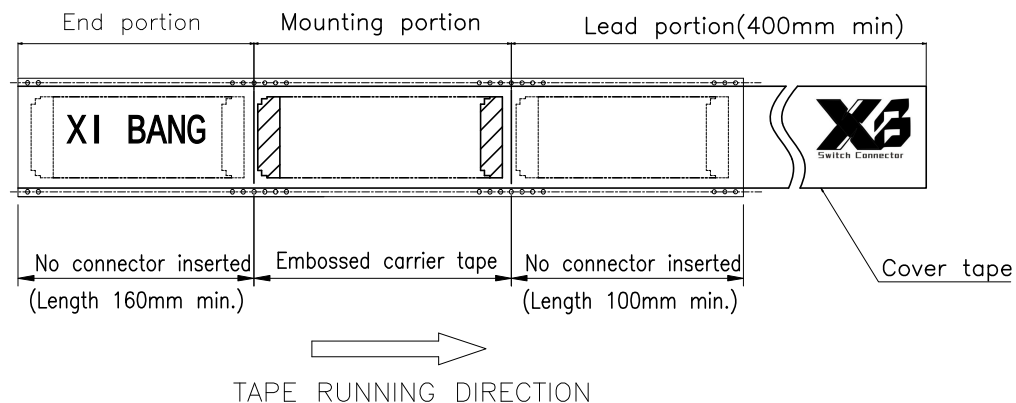


REEL DIMENSIONS

Notes:

1. 10 sprocket hole pitch cumulative tolerance ± 0.2
2. Material: Polystyrene.
4. All dimensions meet EIA-481-B requirements.
3. Quantity: 2000 Pcs/Reel

Circuits	Dimension		Packing (Reel/Caton)
	W	F	
21	24.0(.630)	11.50(.453)	9

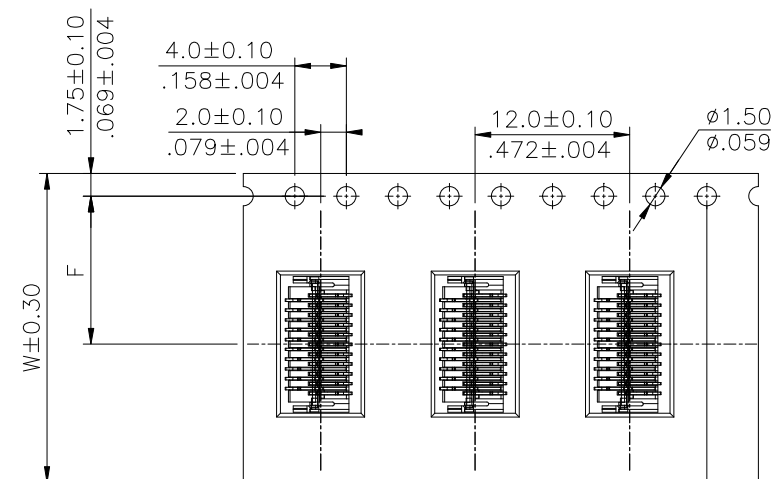

WIDTH : 24 mm Carrier

Lead Free Process

RoHS Compliant

4						UNIT: mm / inch	TITLE: 0.30mm(.012") ZIF FFC/FPC ONE-TOUCH CONNECTOR (1.1H Back-Flip)	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	DRAWING NO. CF7901S2 PART NO. CF79***UOR0-NH		
3				DRAWN BY: yanxu	11/9-23'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2				ENGINEER: yanxu	11/9-23'		MATERIAL:				
1				CHECKED BY: Kevin	11/9-23'						
Sym	NAME	DATE	REVISIONS		APPROVED BY: Phil	11/9-23'	.X ± 0.025/.010 X.* ± 0°30'				
							.XX ± 0.15/.006 X.* ±				
							.XXX ± 0.10/.004 XX.* ±				