
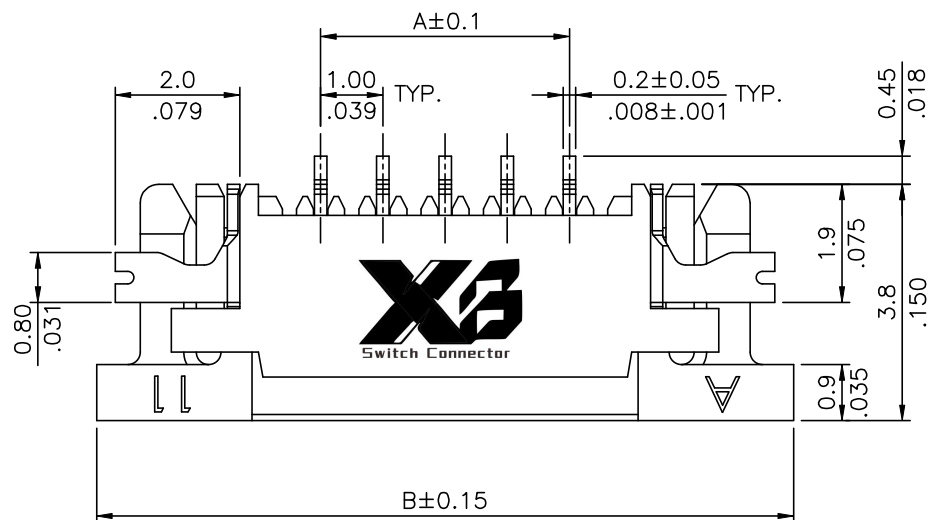



$$A = 1.00 * \text{No. of Spaces}$$

$$B = A + 7.2$$

$$C = A + 2.1$$

①② * Available in 2 through 20 & 24 circuits



SEC.: X-X'

Notes :

- △ * Body : High temperature plastic UL 94V-0, Color Nature
- △ * Slider : High temperature plastic UL 94V-0, Color Black
- * Contact : Phosphor Bronze
With Matte Tin plated
- * Fixed tab : Brass, with Matte Tin plated
- * For Lead-Free IR Reflow process

Ordering Code

△ CF23 ** 1 U 0 * 0 -10 -NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No.

② No. of Circuits

③ Plating code:

1 = 3.05 μm (120 μ") Min. Tin

over 0.76 μm (30 μ") Nickel (Matte Tin Finish)

2 = Gold flash plated over 50 μ" min. Nickel

④ Contact style: U = Upside contact

⑤ Color: 0 = Nature

⑥ Packing option: R = Tape & Reel
T = Tube Packing

△ △ ⑦ Option: 0 = With Logo (Standard)

⑧ Other option:

-10 = Pitch 1.0mm


⑨ -NH = For Lead Free IR Processes
and Halogen-Free

Lead Free Process


Halogen-Free

RoHS Compliant


④					DATE	UNIT: mm / inch		TITLE: 1.0mm(.039") ZIF FFC/FPC UPSIDE CONTACT SLIM SURFACE MOUNT CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
③	Jason	2/16-24'	ECRT124001/ECNT124024	DRAWN BY:	Jason	2/16-24'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
②	Karen	4/03-15'	ECNT115075/ECRT115016	ENGINEER:	Sun	2/16-24'	.X ± 0.15/.006 X.* ± 1"	MATERIAL:	DRAWING NO.	CF2335SC	PART NO.	CF23***U0*0-10-NH
①	Steven	4/8-11'	ECR11021-0/ECN11065	CHECKED BY:	Eisley	2/16-24'	.XX ± 0.10/.004 .X* ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	2/16-24'	.XXX ± 0.05/.002 .XX* ±	FINISH:	SCALE	8 / 1	SHEET	1 OF 3

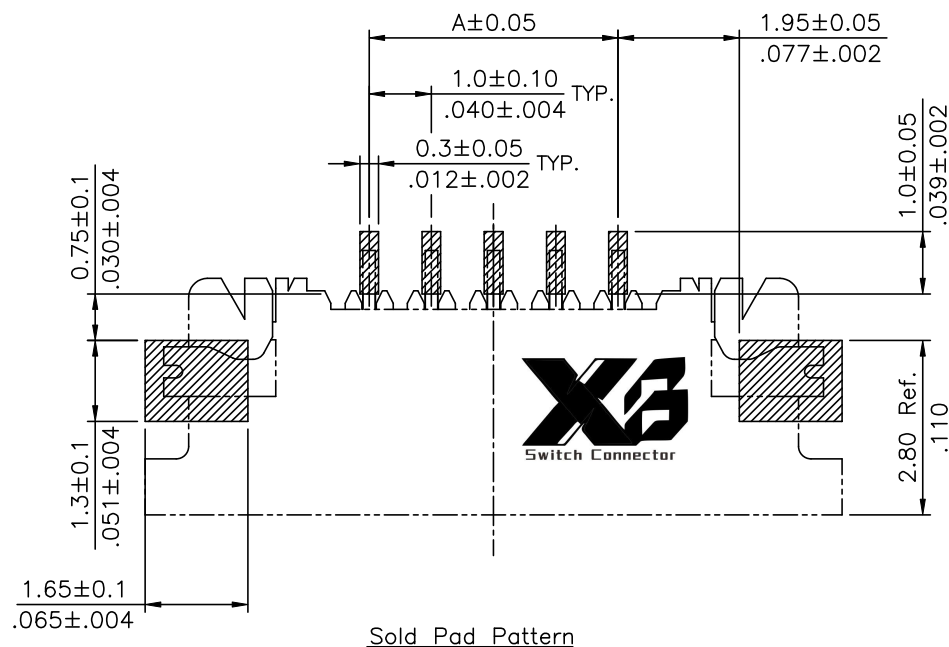

Sold Pad Pattern

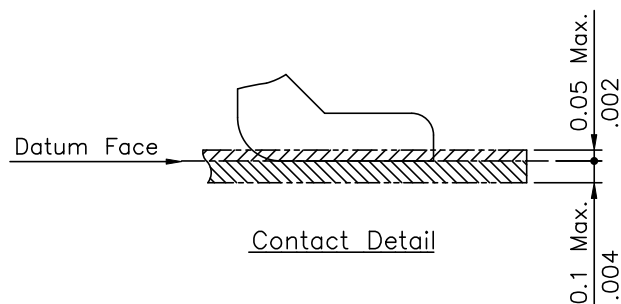

Contact Detail

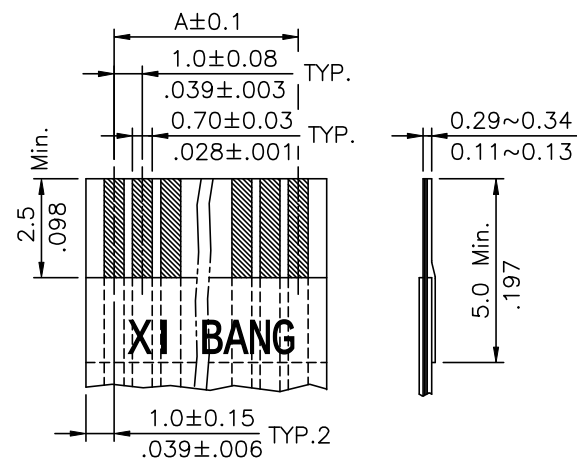

Accommodated FFC/FPC

Halogen-Free


Lead Free Process

RoHS Compliant



4					DATE	UNIT: mm / inch	TITLE: 1.0mm(.039") ZIF FFC/FPC UPSIDE CONTACT SLIM SURFACE MOUNT CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3	Jason	2/16-24'	ECRT124001/ECNT124024	DRAWN BY:	Jason	2/16-24'					
2	Karen	4/03-15'	ECNT115075/ECRT115016	ENGINEER:	Sun	2/16-24'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:			
1	Steven	4/8-11'	ECR11021-0/ECN11065	CHECKED BY:	Eisley	2/16-24'					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	2/16-24'	.X $\pm 0.15/.006$	X' $\pm 1'$	DRAWING NO. CF2335SC		
							.XX $\pm 0.10/.004$	.X' $\pm$	PART NO. CF23***U0*0-10-NH		
							.XXX $\pm 0.05/.002$	.XX' $\pm$	SCALE 8 / 1		
									SHEET 2 OF 3		

NOTES:

- 10 sprocket hole pitch cumulative tolerance ± 0.20 .
- Carrier camber is within 1 mm in 250 mm.
- Material : Clear,Transparent Polystyrene Alloy (UP-6000).
- All dimensions meet EIA-481-B requirements.
- Thickness : 0.30 ± 0.05 mm.
- Component load per 13" reel : 4000 pcs.

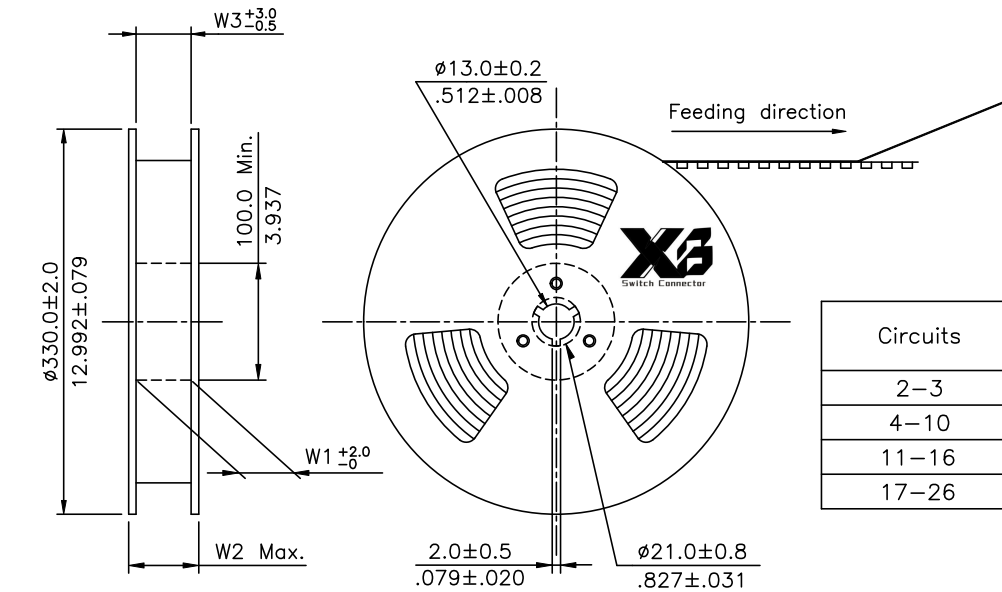

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
2-3	16.0(.630)	-	16.5(.650)	22.5(.886)	16.5(.650)	11
4-10	24.0(.945)	-	24.5(.965)	30.5(1.201)	24.5(.965)	9
11-16	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
17-26	44.0(1.732)	40.40(1.596)	44.5(1.751)	50.4(1.984)	44.5(1.751)	5

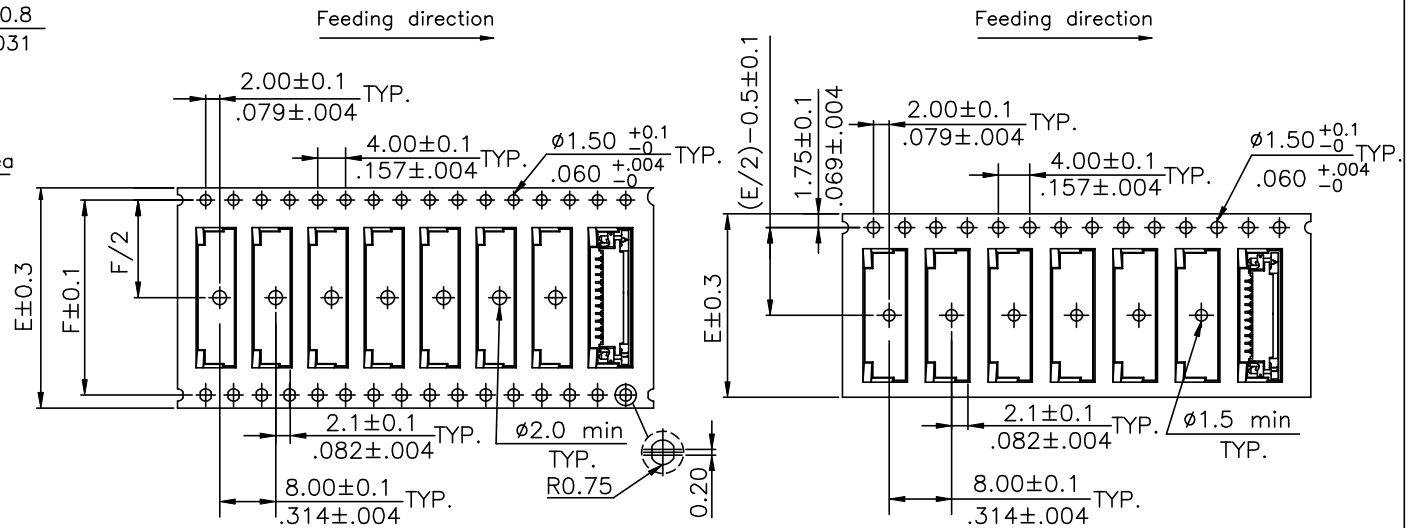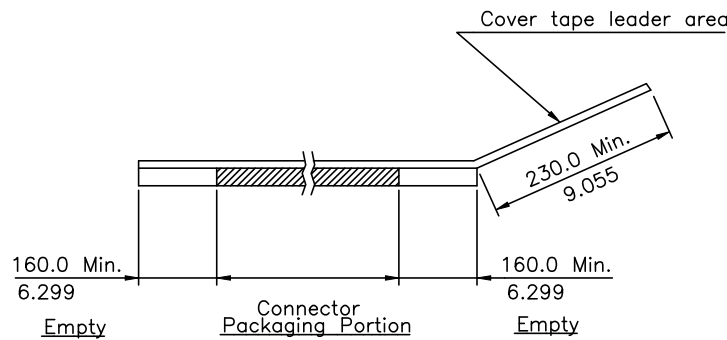

WIDTH : 32, 44 mm Carrier

WIDTH : 16, 24 mm Carrier

RoHS Compliant

4						DATE	UNIT: mm / inch	TITLE: 1.0mm(.039") ZIF FFC/FPC UPSIDE CONTACT SLIM SURFACE MOUNT CONNECTOR	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3	Jason	2/16-24'	ECRT124001/ECNT124024	DRAWN BY:	Jason	2/16-24'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2	Karen	4/03-15'	ECNT115075/ECRT115016	ENGINEER:	Sun	2/16-24'	.X ± .XX ±		MATERIAL:	DRAWING NO.	CF2335SC	PART NO.
1	Steven	4/8-11'	ECR11021-0/ECN11065	CHECKED BY:	Eisley	2/16-24'	.X* ± .XXX ±	FINISH:				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	2/16-24'	.XX* ±					