


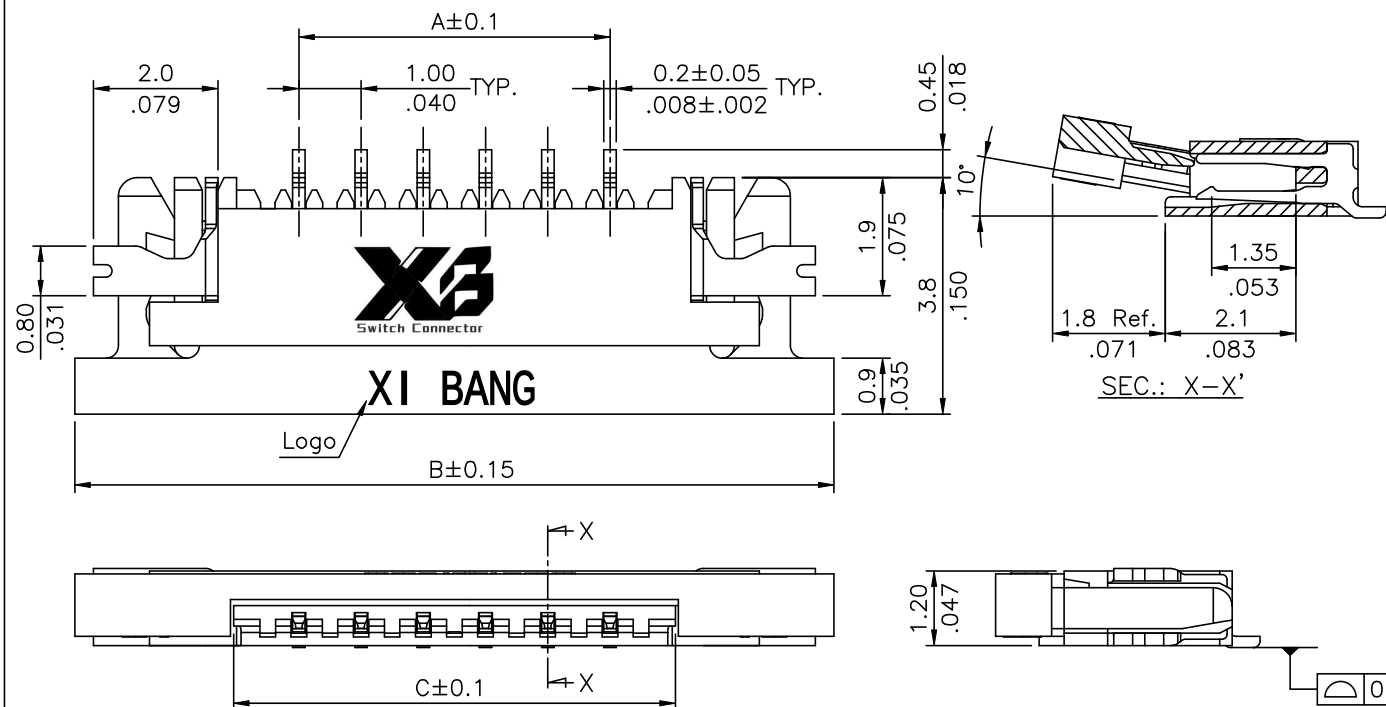

Ordering Code

CF23 ** * D 0 * 0 -10 -NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
② No. of Circuits
③ Plating code:
1= 3.05μm(120μ") Min. Tin
over 0.76μm(30μ") Nickel(Matte Tin Finish)
2= Gold flash plated over 50μ"min. Nickel
④ Contact style: D= Downside contact
⑤ Color: 0= Nature
⑥ Packing option: R= Tape & Reel
T= Tube Packing
⑦ Option: 0= With Logo (Standard)
⑧ Other option:
-10= Pitch 1.0mm
⑨ Other option:
-NH= For Lead Free IR Processes
and Halogen-Free

Notes :

- * Body : High temperature plastic UL 94V-0,
Color Nature
- * Slider : High temperature plastic UL 94V-0,
Color Black
- * Contact : Phosphor Bronze
With Matte Tin plated
- * Fixed tab : Brass, with Matte Tin plated
- * For Lead-Free IR Reflow process

Halogen-Free

Lead Free Process

RoHS Compliant





A = 1.0 * No. of Spaces

B = A + 7.2

C = A + 2.1

* Available in 2 through 20 circuits

④					DATE	UNIT: mm / inch	TITLE: 1.0mm(.039") ZIF FFC/FPC DOWNSIDE CONTACT SLIM SURFACE MOUNT CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
③				DRAWN BY: Jason	2/19-24'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
②	Jason	2/19-24'	ECRT124001/ECNT124024	ENGINEER: Sun	2/19-24'	.X ± 0.15/.006 X' ± 1'	FINISH:	DRAWING NO.	CF2345SC	PART NO.	CF23***D0*0-10-NH
①	Karen	4/03-15'	ECNT115075/ECRT115016	CHECKED BY: Eisley	2/19-24'	.XX ± 0.10/.004 X' ±		SCALE	8 / 1	SHEET	1 OF 3
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	2/19-24'	.XXX ± 0.05/.002 XX' ±					

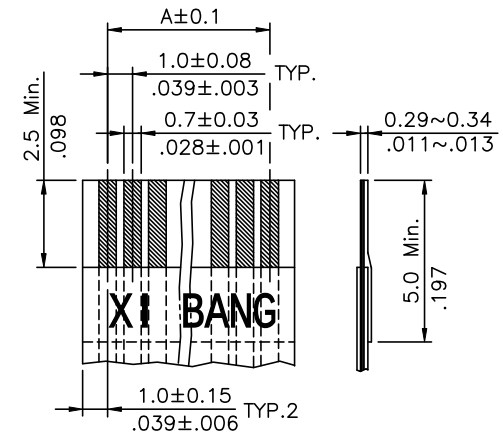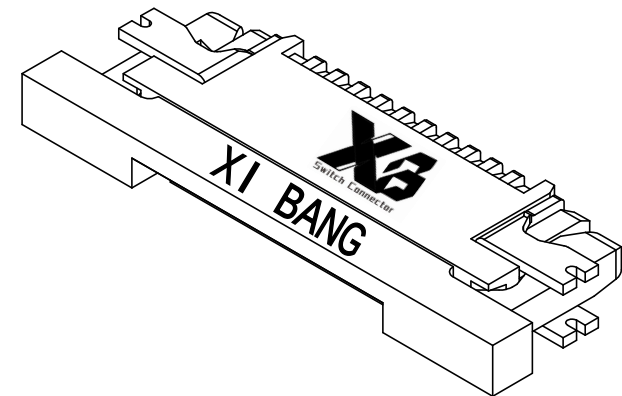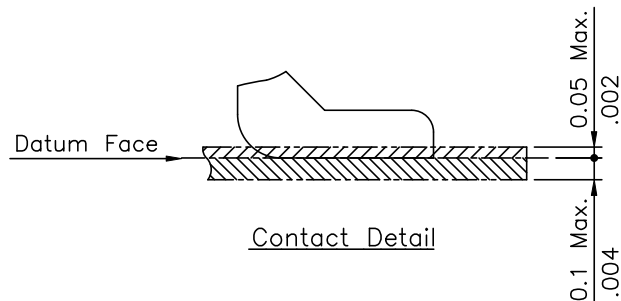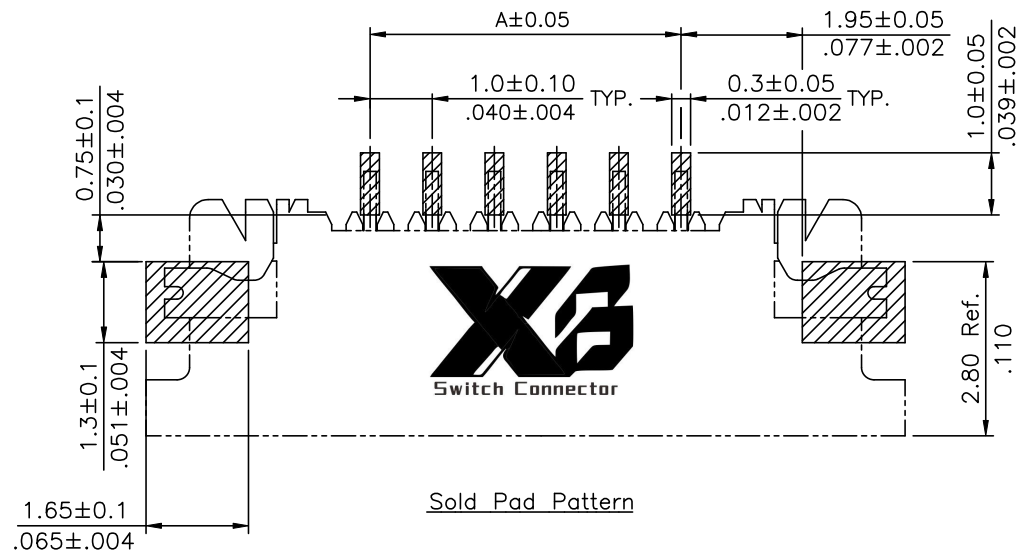


Accommodated FFC/FPC

Halogen-Free

Lead Free Process

RoHS Compliant



4					DATE	UNIT: mm / inch	TITLE: 1.0mm(.039") ZIF FFC/FPC DOWNSIDE CONTACT SLIM SURFACE MOUNT CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.
3				DRAWN BY: Jason	2/19-24'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
2	Jason	2/19-24'	ECRT124001/ECNT124024	ENGINEER: Sun	2/19-24'	.X $\pm 0.15/.006$ X' $\pm 1'$	MATERIAL:	DRAWING NO. CF2345SC PART NO. CF23***D0*0-10-NH
5	Karen	4/03-15'	ECNT115075/ECRT115016	CHECKED BY: Eisley	2/19-24'	.XX $\pm 0.10/.004$ X" $\pm$		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	2/19-24'	.XXX $\pm 0.05/.002$ XX" $\pm$	FINISH:	SCALE 8 / 1 SHEET 2 OF 3

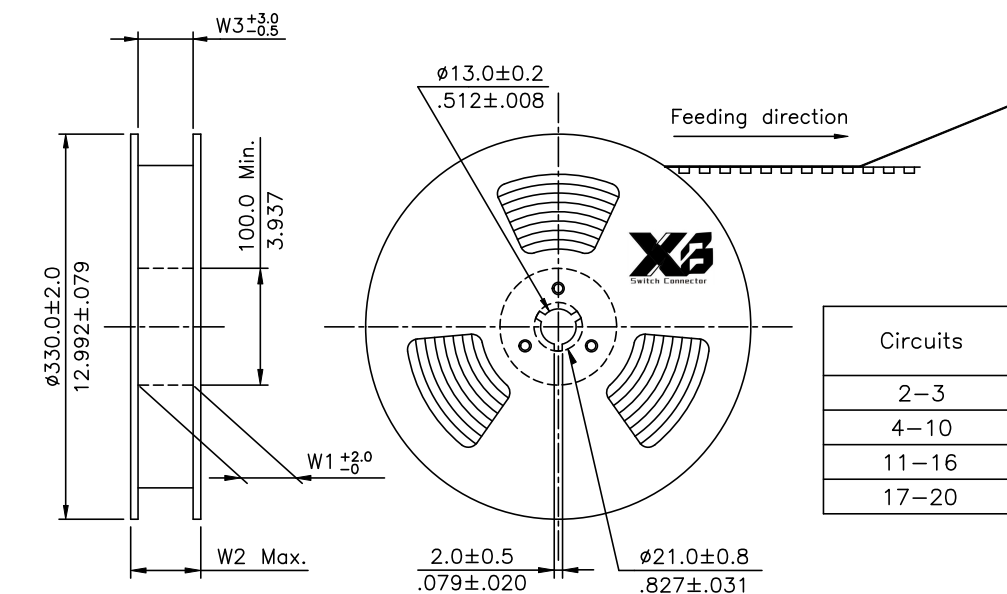

NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Clear,Transparent Polystyrene Alloy (UP-6000).
4. All dimensions meet EIA-481-B requirements.
5. Thickness : 0.30 ± 0.05 mm.
6. Component load per 13" reel : 4000 pcs.

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
2-3	16.0(.630)	—	16.5(.650)	22.5(.886)	16.5(.650)	11
4-10	24.0(.945)	—	24.5(.965)	30.5(1.201)	24.5(.965)	9
11-16	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
17-20	44.0(1.732)	40.40(1.596)	44.5(1.751)	50.4(1.984)	44.5(1.751)	5

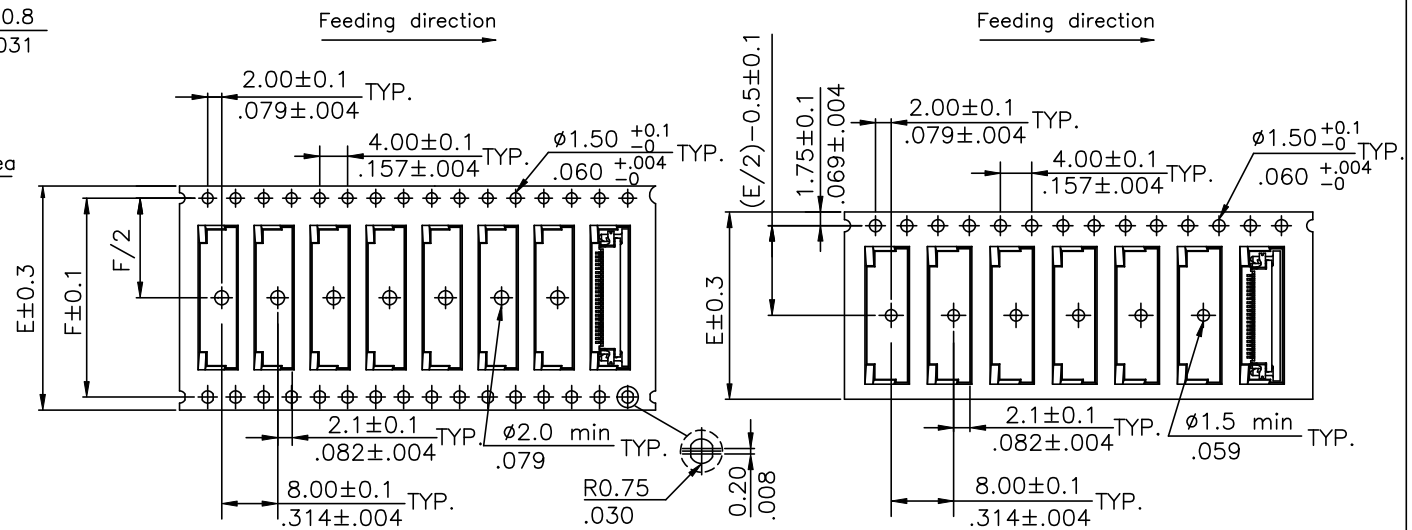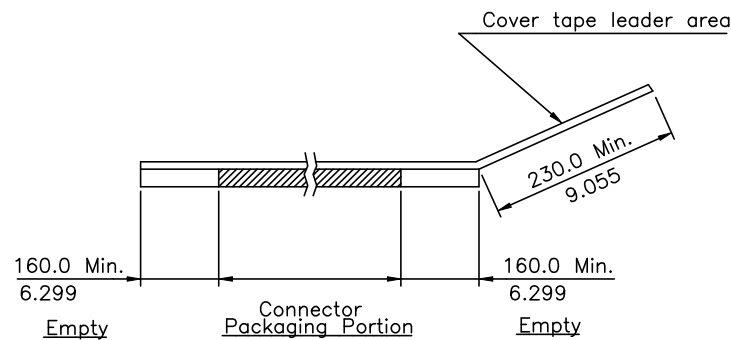

WIDTH : 32,44 mm Carrier

WIDTH : 16, 24 mm Carrier

RoHS Compliant

4						DATE	UNIT: mm / inch		TITLE: 1.0mm(.039") ZIF FFC/FPC DOWNSIDE CONTACT SLIM SURFACE MOUNT CONNECTOR	Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Jason	2/19-24'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:		
2	Jason	2/19-24'	ECRT124001/ECNT124024	ENGINEER:	Sun	2/19-24'	.X ±	X' ± 1'					
1	Karen	4/03-15'	ECNT115075/ECRT115016	CHECKED BY:	Eisley	2/19-24'	.XX ±	.X' ±			FINISH:		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	2/19-24'	.XXX ±	.XX' ±					
										DRAWING NO.	CF2345SC	PART NO.	CF23***D0*0-10-NH
										SCALE		SHEET	3 OF 3