


Materials:

- * Insulator: Glass filled polyester UL 94V-0
- * Contacts: Copper alloy
- △ * Shell: Steel, Nickel plated as standard

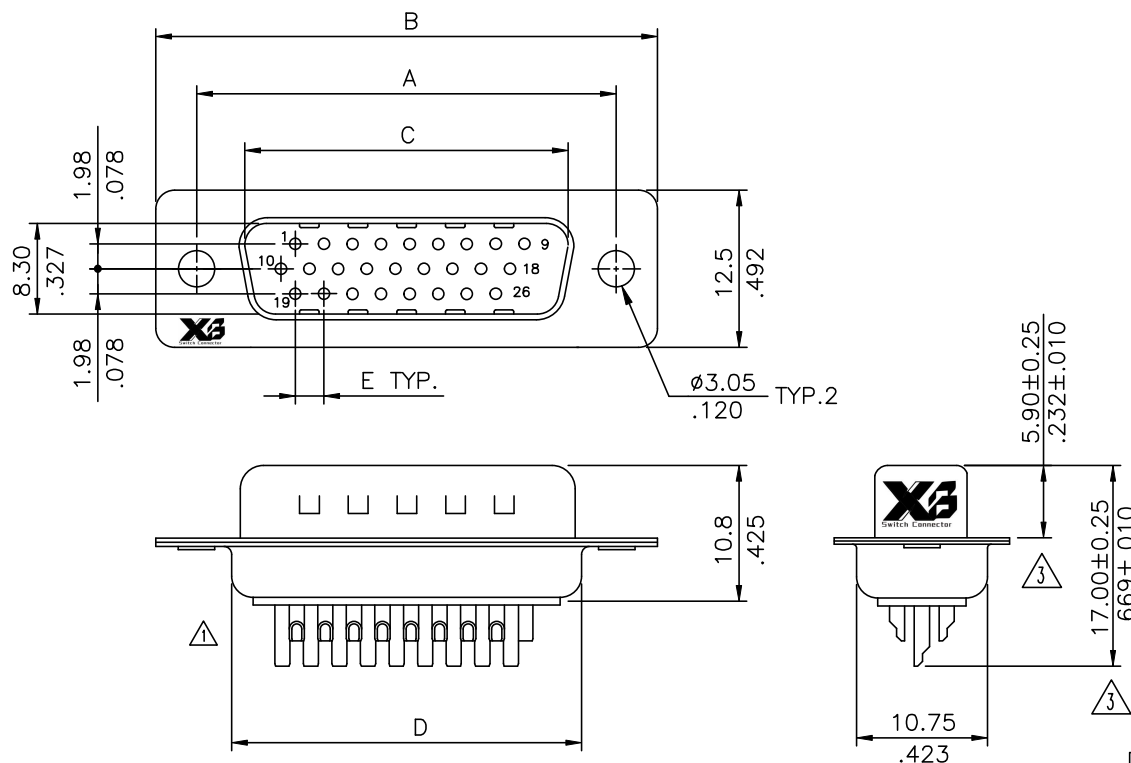

Circuits	Dimension				
	A	B	C	D	E
15	25.00(.984)	30.8(1.213)	16.92(.666)	19.20(.756)	2.29(.090)
26	33.32(1.312)	39.2(1.543)	25.25(.994)	27.70(1.091)	2.29(.090)
44	47.04(1.852)	53.1(2.091)	38.96(1.534)	41.10(1.618)	2.29(.090)
62	63.50(2.500)	69.4(2.732)	55.42(2.182)	57.30(2.256)	2.41(.095)

Ordering Code :

CD01 ** P * * **
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits
- ③ Contact type: P= Plug(Male)
- ④ Plating code:
 2= Gold flash plated over Nickel
 A= Selective Gold flash plated over Nickel
 B= Selective 0.38 μ m(15 μ "") Gold plated over 1.27 μ m(50 μ "") Nickel
 C= Selective 0.76 μ m(30 μ "") Gold plated over 1.27 μ m(50 μ "") Nickel
- ⑤ Color: 1= Black, 7= Blue, 0= White
- ⑥ Mounting style:
 00= With ϕ 3.05mm holes on shell(Standard)
 A0= Riveted #4-40 UNC close nuts on front shell
 B0= Riveted #4-40 UNC open nuts on front shell
 C0= Riveted #4-40 UNC open nuts on rear shell

Mounting Style

Code	00	Code	A0	Code	B0	Code	C0
	DIM. L= 5.8mm		DIM. L= 4.0mm		DIM. L= 4.0mm		

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: HIGH-DENSITY D-SUB SOLDER CUP MALE CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
③	Jessie	5/16-23'	ECRT123028/ECNT123111	DRAWN BY:	Jessie	6/26-23'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
②	Ken	3/12-18'	ECRT117079/ECNT118047	ENGINEER:	Sun	6/26-23'	X ± 0.30/.012 X' ± 1"	MATERIAL:			
①	Ken	7/19-16'	ECRT116029/ECNT116156	CHECKED BY:	Eisley	6/26-23'	XX ± 0.20/.008 .X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	6/26-23'	XXX ± 0.10/.004 .XX' ±	FINISH:			
								DRAWING NO.	CD0102SI	PART NO.	CD01**P****
								SCALE	2 / 1	SHEET	1 OF 1