

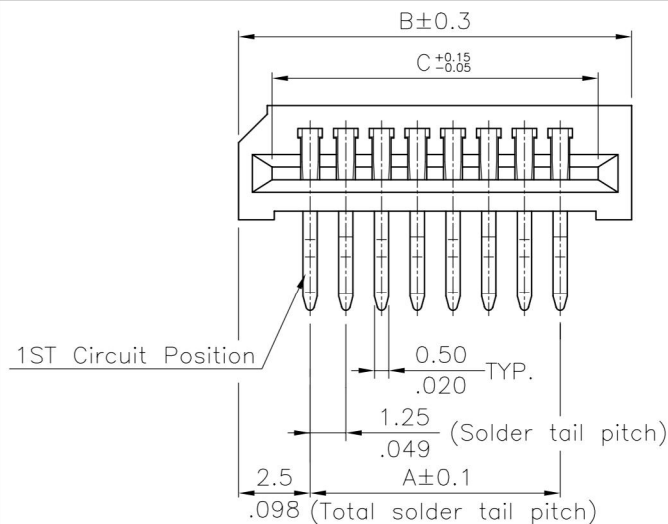
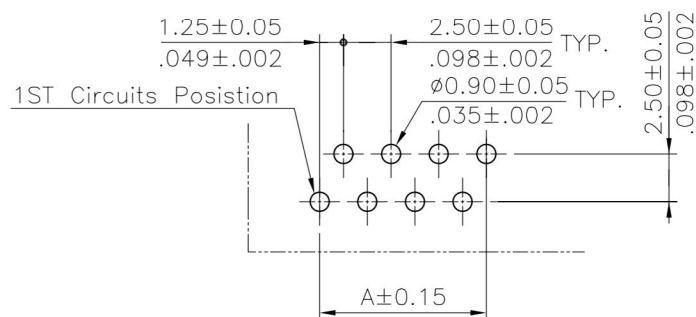
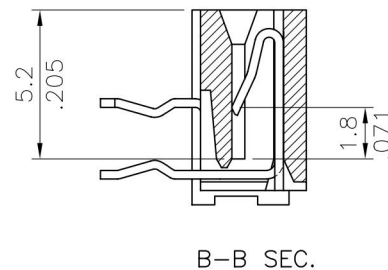



4						DATE	UNIT: mm / inch		TITLE: 1.25mm(.049") R/A DIP TYPE LIF FFC/FPC CONNECTOR	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Sandy	9/22-07'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:	DRAWING NO.	CF1202SE
2	Sandy	9/22-07'	ECN07381/ECR07065-1	ENGINEER:	Eisley	9/28-07'	.X ± 0.15/.006	X* ± 1"	FINISH:				
1	Eisley	1/9-06"	ECN06010	CHECKED BY:	David	9/28-07'	.XX ± 0.10/.004	X* ±		SCALE	3 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	9/28-07'	.XXX ± 0.05/.002	XX* ±					

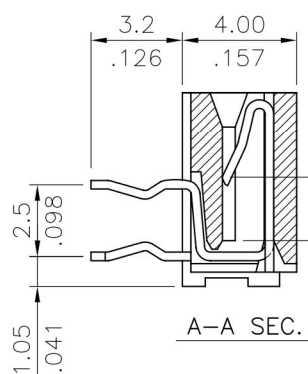


$A = 1.25 \times \text{No. of Spaces}$
 $B = A + 5.0$
 $C = A + 2.66$
 * Available in 3 through 36 circuits

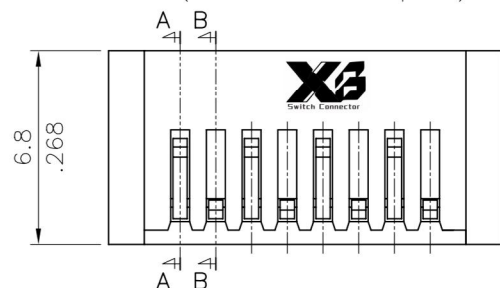

Recommended P.C. Board Layout

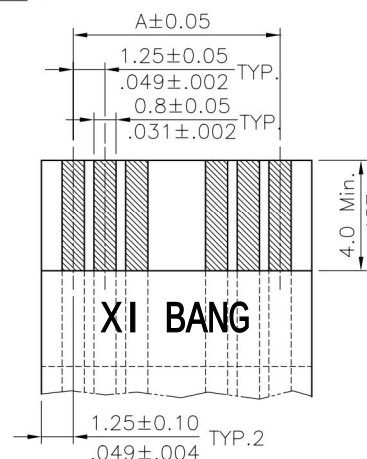

* ACCOMMODATED FFC

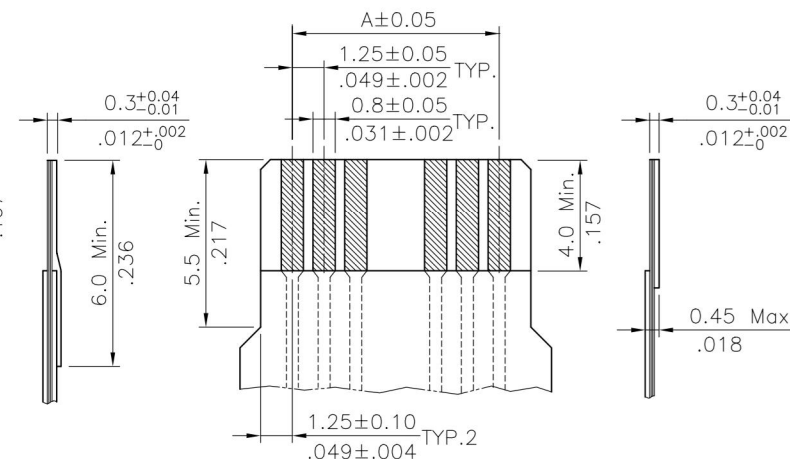

* ACCOMMODATED FPC

Material:




- * Insulation: Nylon46 with 40% GF.
UL 94V-0, Color Black
- * Contact: Phosphor Bronze

Ordering Code



CF12 ** 1 H0 T 0 -LF
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② No. of Circuits
- ③ Plating code:
1 = 2.54μm(100μ") Tin over
0.76μm(30μ") Nickel(Matte Tin Finish)
- ④ Contact type : H0= Right angle type
- ⑤ Packing : T= Tube Packaged
- ⑥ Other option: 0= Standard
- ⑦ -LF= For Leadfree IR Processes

4						DATE	UNIT: mm / inch		TITLE: 1.25mm(.049") R/A DIP TYPE LIF FFC/FPC CONNECTOR	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Karen	3/9-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2				ENGINEER:	Eisley	3/10-09'	.X ± 0.15/.006	X" ± 1"	MATERIAL:				
1				CHECKED BY:	David	3/10-09'	.XX ± 0.10/.004	X" ±					
Sym	NAME	DATE	REVISIONS	APPROVED BY:	Alex	3/10-09'	.XXX ± 0.05/.002	.XX" ±	FINISH:				
										DRAWING NO.	CF1213SA	PART NO.	CF12**1H0T0-LF
										SCALE	3 / 1	SHEET	1 OF 1

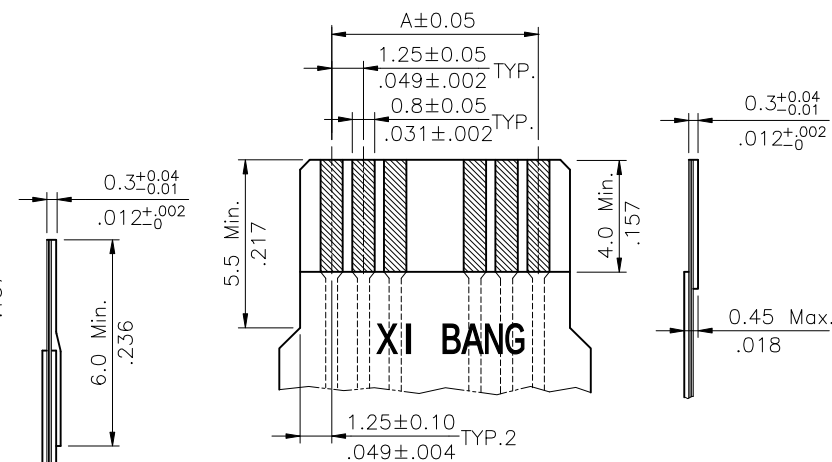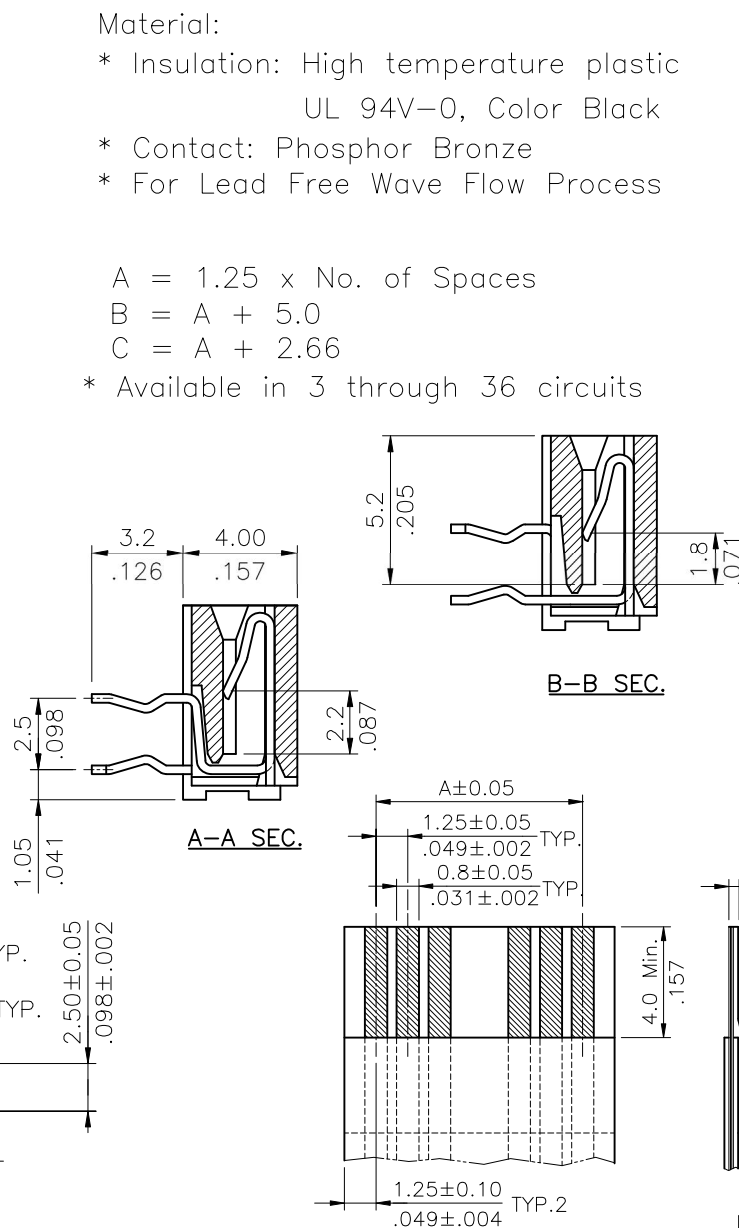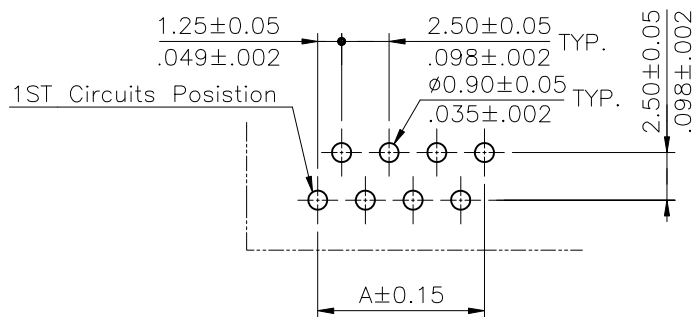

4					DATE	UNIT: mm / inch		TITLE: 1.25mm(.049") R/A DIP TYPE LIF FFC/FPC CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.
3				DRAWN BY: Sun	6/20-19'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2				ENGINEER: Sun	6/20-19'	.X ± 0.15/.006	X: ± .1"	MATERIAL:	DRAWING NO. CF1217SA PART NO. CF12**1HOTO-NH
1				CHECKED BY: Eisley	6/24-19'	.XX ± 0.10/.004	.X ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	6/24-19'	.XXX ± 0.05/.002	.XX ±	FINISH:	SCALE 3 / 1 SHEET 1 OF 1

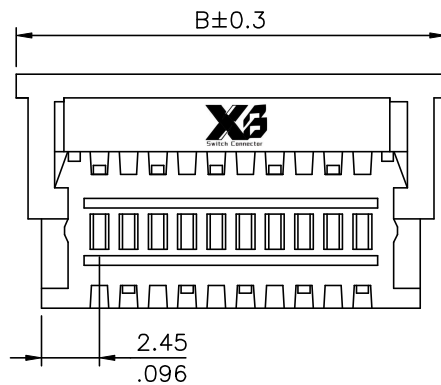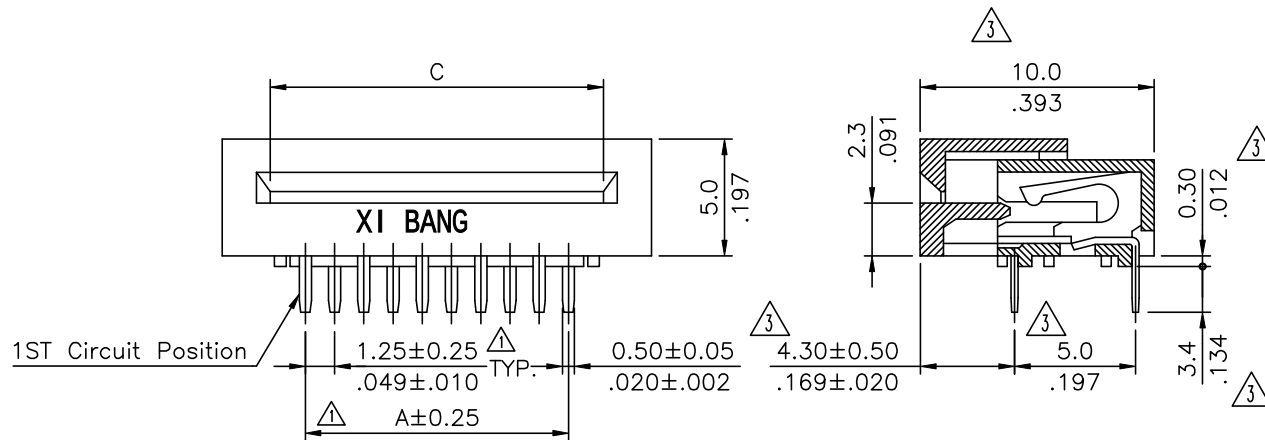


A = 1.25 * No. of Spaces

B = A + 7.05

C = A + 2.7

④ * Available in 10,13&14 circuits

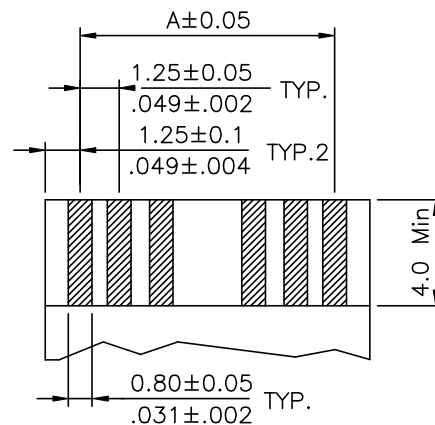

Accommodated FPC/FPC
(Thickness: 0.3mm±0.05)

Material:

* Insulation: Glass filled polyester UL 94V-0

* Contact: Phosphor Bronze

Ordering Code

CF01 ** 1 H 0 00
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits: 10,13&14


③ Plating code:

1 = Tin plated over Nickel

④ Entry option: H = Right angle

⑤ Color: 0 = Nature

⑥ Other options: 00 = Standard

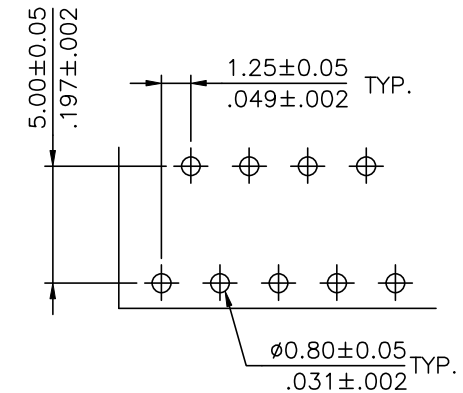

Recommended P.C. Board Layout

RoHS Compliant

④	Jessie	11/21-23'	ECNT123255/ECRT123078			DATE	UNIT: mm / inch	TITLE: 1.25mm(.049")	X3 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.
③	Yushu	7/28-20'	ECNT120192/ECRT120046	DRAWN BY:	Jessie	11/24-23'	TOLERANCE UNLESS OTHERWISE SPECIFIED	ZIF FPC/FPC SOCKET	
②	Karen	9/03-15'	ECNT115199/ECRT115075	ENGINEER:	Sun	11/24-23'	.X ± 0.30/.012 X' ± 1"	MATERIAL:	DRAWING NO. CF0104SE PART NO. CF01**1H000
①	Karen	10/1-08'	ECR08076-0/ECN08494	CHECKED BY:	Eisley	11/24-23'	.XX ± 0.25/.010 X' ±	FINISH:	SCALE 3 / 1 SHEET 1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	11/24-23'	.XXX ±		