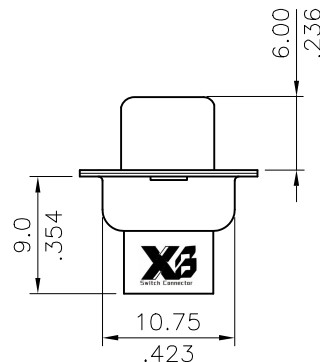
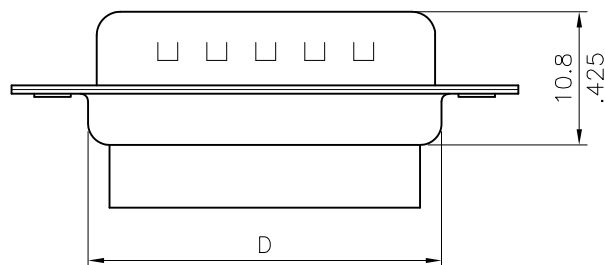
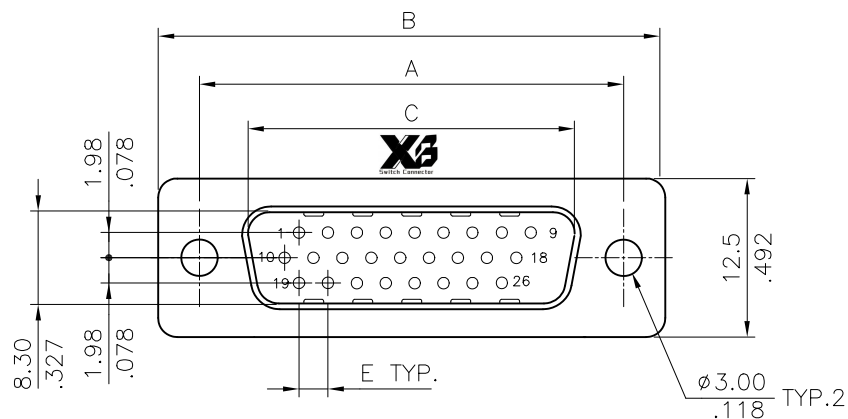




Materials:

* Insulator: Glass filled polyester UL 94V-0

* Contacts: Copper alloy

△ * Shell: Steel, Nickel plated as standard

Ordering Code :

CD02 26 P 0 1 00
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits

③ Contact type: P= Plug(Male)

④ Plating code:

⑤ Color: 1= Black, 7= Blue, 0= White

⑥ Mounting style:

△ 00= With $\phi 3.00$ mm holes on shell(Standard)

A0= Riveted #4-40 UNC close nuts on front shell





B0= Riveted #4-40 UNC open nuts on front shell

C0= Riveted #4-40 UNC open nuts on rear shell

Circuits	Dimension				
	A	B	C	D	E
15	25.00(.984)	30.8(1.213)	16.92(.666)	19.20(.756)	2.29(.090)
26	33.32(1.312)	39.2(1.543)	25.25(.994)	27.70(1.091)	2.29(.090)
44	47.04(1.852)	53.1(2.091)	38.96(1.534)	41.10(1.618)	2.29(.090)
62	63.50(2.500)	69.4(2.732)	55.42(2.182)	57.30(2.256)	2.41(.095)

Mounting Style

RoHS Compliant

Code	00	Code	A0	Code	B0	Code	C0
		DIM. L= 5.8mm 		DIM. L= 4.0mm 		DIM. L= 4.0mm 	

△4					DATE	UNIT: mm / inch	TITLE: HIGH-DENSITY D-SUB CRIMP TYPE MALE CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD
△3				DRAWN BY: Ken	3/12-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
△2	Ken	3/12-18'	ECRT117079/ECNT118047	ENGINEER: Sun	3/13-18'	.X ± 0.30/.012 X' ± 1'	MATERIAL:	DRAWING NO. CD0202SE PART NO. CD02**P0***
△1	Sandy	3/25-10'	ECN10079	CHECKED BY: Eisley	3/15-18'	.XX ± 0.20/.010 X' ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	3/15-18'	.XXX ± 0.10/.004 X' ±	FINISH:	SCALE 2 / 1 SHEET 1 OF 1