


Materials:

* Insulator: Glass filled polyester UL 94V-0

* Contacts: Copper alloy

△ * Shell: Steel, Nickel plated as standard

Recommended P.C. Board Layout see drawing No. CD0303S*

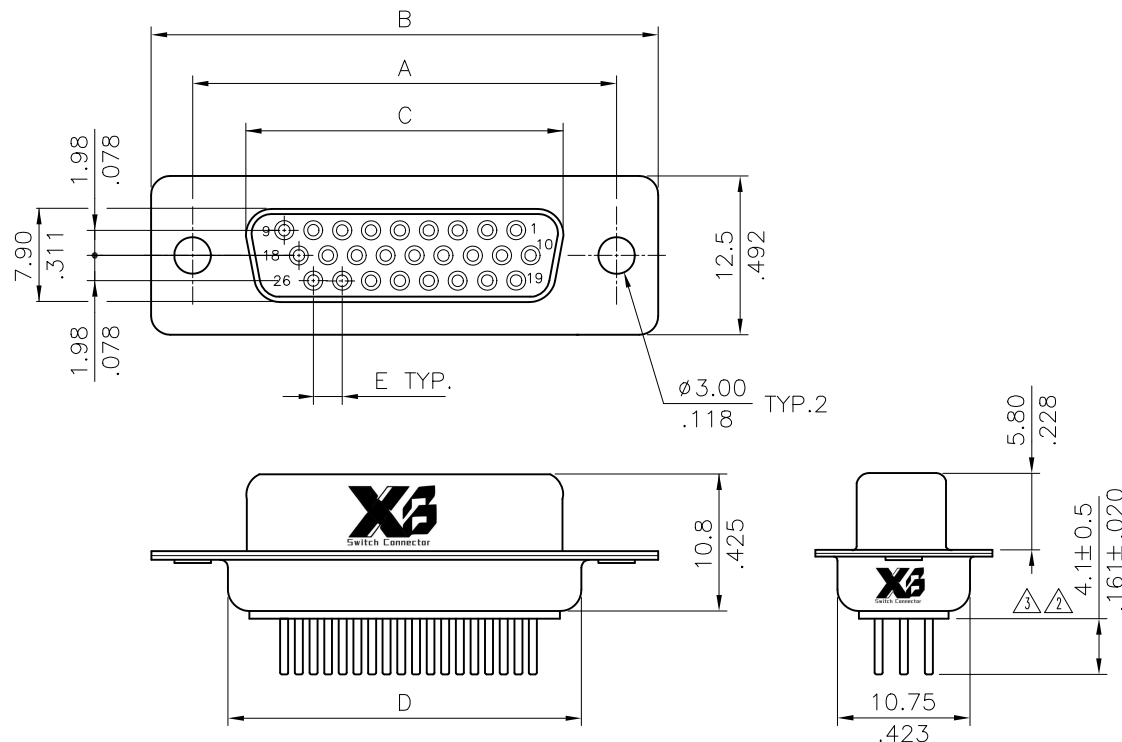

Circuits	Dimension				
	A	B	C	D	E
15	25.00(.984)	30.8(1.213)	16.30(.642)	19.20(.756)	2.29(.090)
26	33.32(1.312)	39.2(1.543)	24.60(.969)	27.70(1.091)	2.29(.090)
44	47.04(1.852)	53.1(2.091)	38.30(1.508)	41.10(1.618)	2.29(.090)
62	63.50(2.500)	69.4(2.732)	54.80(2.157)	57.30(2.256)	2.41(.095)

Ordering Code :

CD03 26 S A 1 00
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② No. of Circuits
- ③ Contact type: S= Receptacle(Female)
- ④ Plating code:
2= Gold flash plated over Nickel
A= Selective Gold flash plated over Nickel
B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
C= Selective 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ⑤ Color: 1= Black , 7= Blue
- ⑥ Mounting style:
△ 00= With ø3.00mm holes on shell(Standard)
B0= Riveted #4-40 UNC open nuts on front shell
C0= Riveted #4-40 UNC open nuts on rear shell
△ D0= Riveted #4-40 UNC ground stand-off on rear shell

Lead Free Process

RoHS Compliant

Mounting Style

Code	00	Code	B0	Code	C0	Code	D0
	DIM. L= 4.0mm		DIM. L= 3.2mm		DIM. L= 6.0mm		

△5	Ken	3/12-18'	ECRT117079/ECNT118047		DATE	UNIT: mm / inch	TITLE: HIGH-DENSITY D-SUB TOP ENTRY		X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
△4	Sandy	3/25-10'	ECN10079	DRAWN BY:	Ken	3/12-18'	BOARD MOUNT FEMALE CONNECTOR					
△3	Karen	9/18-08'	ECN08458/ECR08074-0	ENGINEER:	Sun	3/13-18'	MATERIAL:					
△2	Sandy	12/19/05'	ECN05439/ECR05124-0	CHECKED BY:	Eisley	3/15-18'	FINISH:		DRAWING NO.	CD0301SJ	PART NO.	CD03**S****
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/15-18'			SCALE	2 / 1	SHEET	1 OF 1
							TOLERANCE UNLESS OTHERWISE SPECIFIED					
							.X ± 0.30/.012	X* ± 1"				
							.XX ± 0.20/.010	X* ±				
							.XXX ± 0.10/.004	XX* ±				