


Materials:

* Insulator: Glass filled polyester UL 94V-0

* Contacts: Copper alloy

△* Shell: Steel, Nickel plated as standard

Recommended P.C. Board Layout see drawing No. CD0304S*

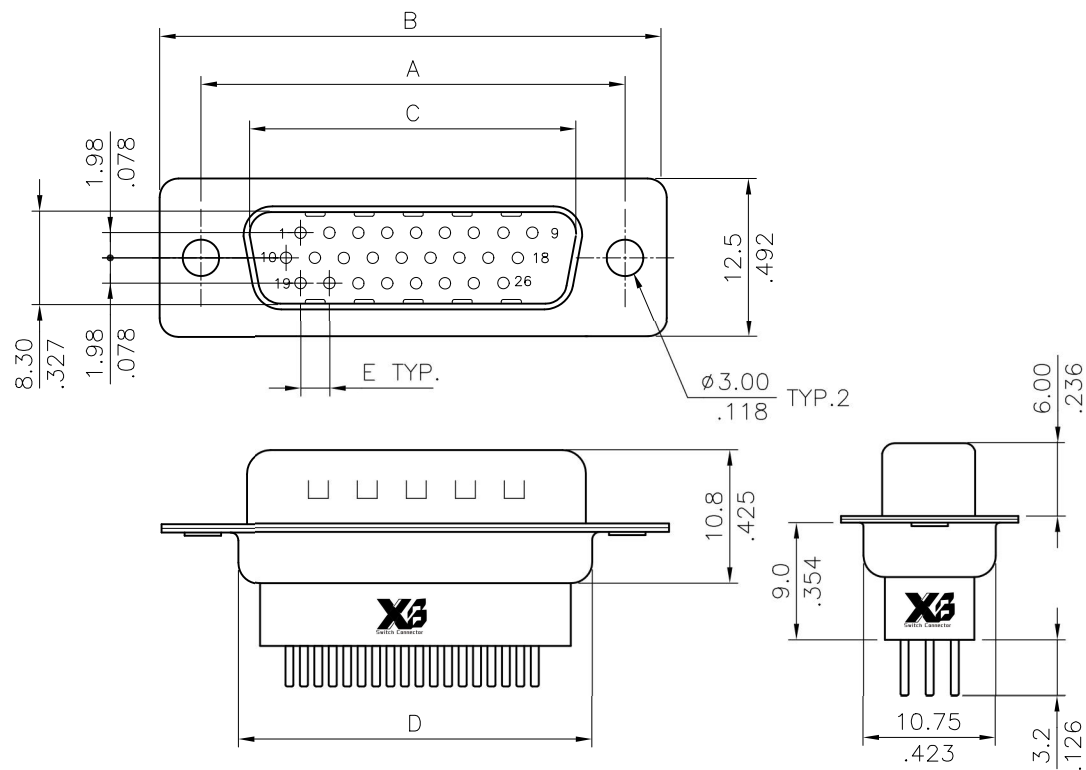

Circuits	Dimension				
	A	B	C	D	E
15	25.00(.984)	30.8(1.213)	16.92(.666)	19.2(.756)	2.29(.090)
26	33.32(1.312)	39.2(1.543)	25.25(.994)	27.70(1.091)	2.29(.090)
44	47.04(1.852)	53.1(2.091)	38.96(1.534)	41.10(1.618)	2.29(.090)
62	63.50(2.500)	69.4(2.732)	55.42(2.182)	57.30(2.256)	2.41(.095)

Ordering Code :

CD04 26 P 2 1 00
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits

③ Contact type:P= Plug(Male)

△④ Plating option:

2= Gold flash plated over Nickel

⑤ Color: 1= Black

⑥ Other Option:

△ 00= With $\phi 3.00$ mm holes on shell(Standard)

B0= Riveted #4-40 UNC open nuts on front shell

C0= Riveted #4-40 UNC open nuts on rear shell

D*= Riveted #4-40 UNC close ground stand-off on rear shell

Mounting Style

Code	00	Code	B0	Code	C0	Code	D*

Lead Free Process

RoHS Compliant

△4					DATE	UNIT: mm / inch	TITLE: HIGH-DENSITY D-SUB TOP ENTRY HIGH PROFILE BOARD MOUNT MALE CONNECTOR	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
△3	Ken	3/12-18'	ECRT117079/ECNT118047	DRAWN BY:	Ken	3/12-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
△2	Sandy	3/25-10'	ECN10079	ENGINEER:	Sun	3/13-18'	.X ± 0.30/.012 X' ± 1'	DRAWING NO. CD0404SF PART NO. CD04**P21**			
△1	Jim	8/31/06	ECR06076-0/ECN06308	CHECKED BY:	Eisley	3/15-18'	.XX ± 0.20/.010 X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/15-18'	.XXX ± 0.10/.004 X' ±	SCALE 2 / 1 SHEET 1 OF 1			