

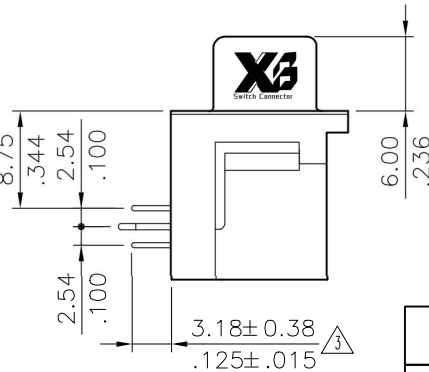
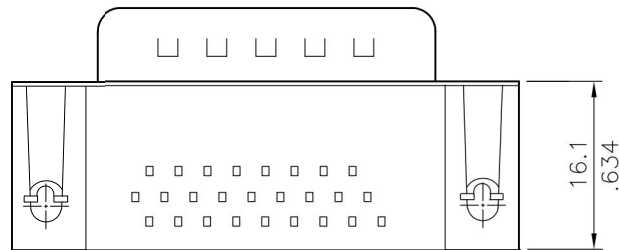
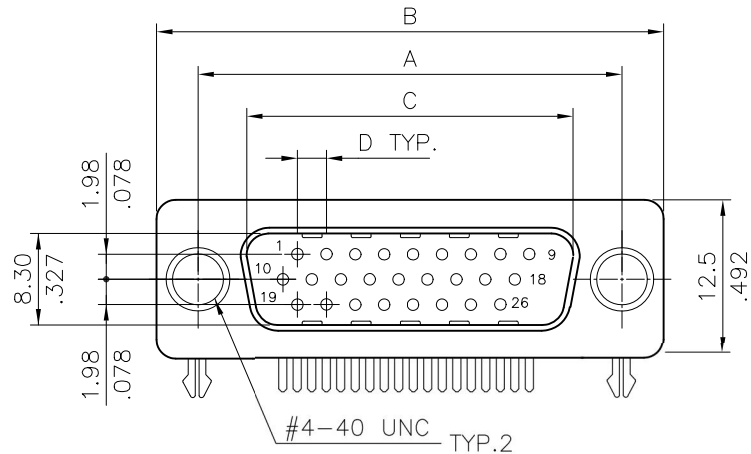
Material:

* Insulator: Glass filled polyester UL 94V-0

* Contacts: Copper alloy

△ * Shell: Steel, Nickel plated as standard

Recommended P.C. Board Layout see drawing No. CD0506S*



Circuits	Dimension			
	A	B	C	D
15	25.00(.984)	30.8(1.213)	16.92(.666)	2.29(.090)
26	33.32(1.312)	39.2(1.543)	25.25(.994)	2.29(.090)
44	47.04(1.852)	53.1(2.091)	38.96(1.534)	2.29(.090)

Ordering Code:

CD05 26 P 2 1 F0
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits

③ Contact type: P= Plug(Male)

④ Plating option:

2= Gold flash plated over Nickel

A= Selective Gold flash plated over Nickel

B= Selective 0.38μm(15μ") Gold plated over
1.27μm(50μ") Nickel

C= Selective 0.76μm(30μ") Gold plated over
1.27μm(50μ") Nickel

⑤ Color: 1= Black; 0= White; 7= Blue

⑥ Other Option:

F0= Riveted ground hooks with #4-40 UNC open
(Standard)

△ G0= Riveted ground hooks pre-loaded

△ 4 #4-40 UNC Hex screw
(For Circuits 15, 44)





△ 2 I0= Riveted ground tabs thread #4-40 UNC open
and ground tabs with ø3.05mm holes

J0= Assembly ground hooks by #4-40 UNC Hex screw

Mounting Style

Lead Free Process

RoHS Compliant

Code	F0	Code	G0	Code	I0	Code	J0
		DIM. L= 4.8mm 				DIM. L= 4.8mm 	

△6	Ken	3/12-18'	ECRT117079/ECNT118047			DATE	UNIT: mm / inch		TITLE: HIGH-DENSITY D-SUB PCB MOUNT MALE CONNECTOR		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
△5	Karen	11/20-15'	ECNT115246/ECRT115101	DRAWN BY:	Ken	3/12-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED							
△4	Karen	9/22-15'	ECNT115220/ECRT115084	ENGINEER:	Sun	3/13-18'	.X ± 0.30/0.012	X' ± 1"	MATERIAL:					
△3	Karen	10/16-14'	ECNT114233/ECRT114080	CHECKED BY:	Eisley	3/15-18'	.XX ± 0.20/0.010	.X' ±						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/15-18'	.XXX ± 0.10/0.004	.XX' ±	FINISH:					
DRAWING NO.		CD0504SL		PART NO.		CD05**P*1**								
SCALE		2 / 1		SHEET 1 OF 1										