

MATERIAL:

Housing: PBT, UL 94V-0, Color:Black.





Terminal: Copper Alloy.

Shell: SPCC. Nickel plated

Rivet & Screw: Copper Alloy. Nickel plated

Boardlock: Copper Alloy. Tin plated

* For Lead Free Wave Flow Process

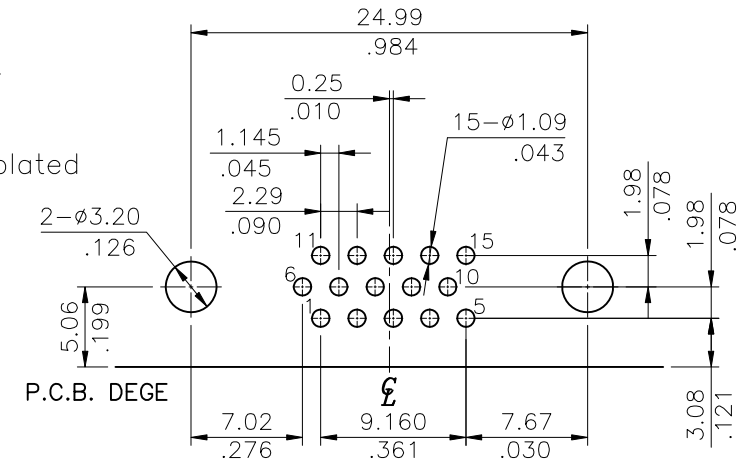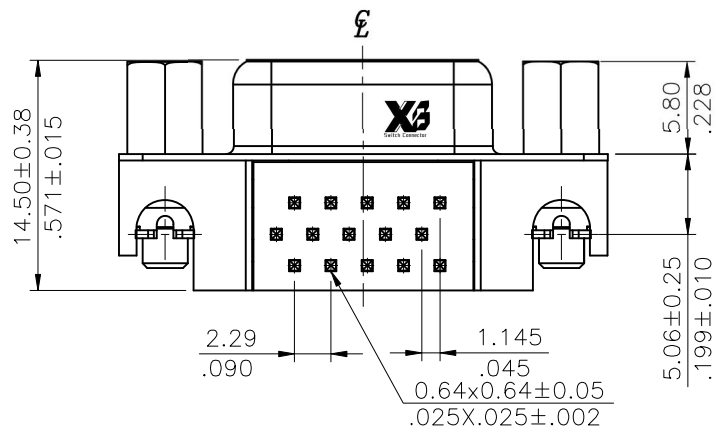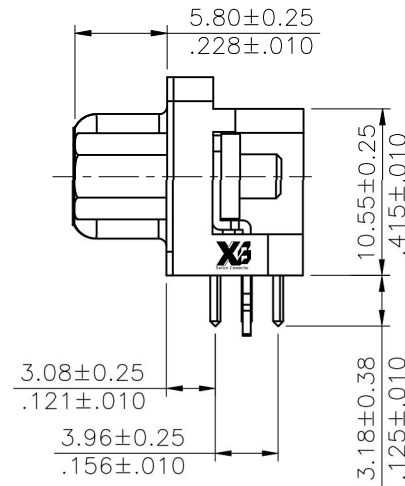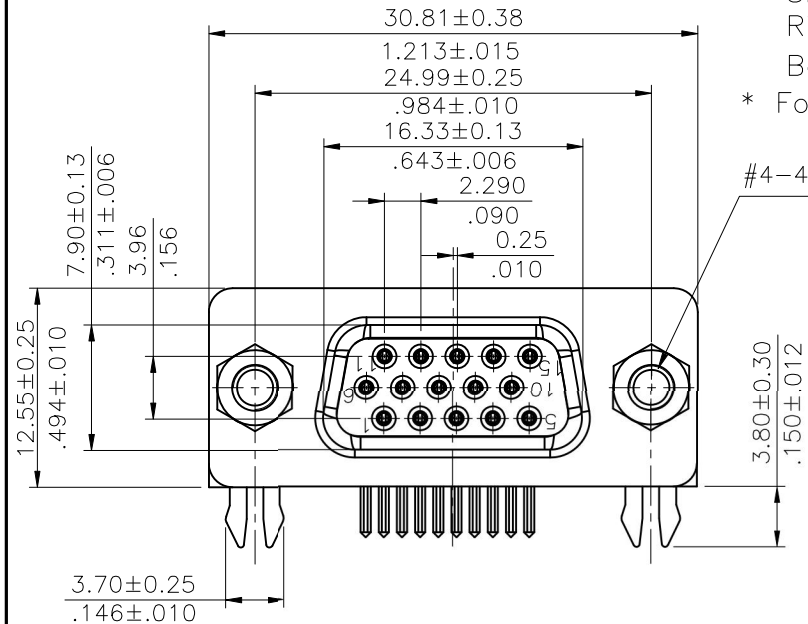

RECOMMENDED P.C.B. LAYOUT

Ordering Code:

CD13 15 S * 1 00 -R
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② Contacts:

③ Contact type: S= Female

④ Plating option:

A= Selective Gold flash plated over Nickel

B= Selective 15μ" Gold plated over Nickel

⑤ Color: 1= Black

⑥ Option: 00= Standard

⑦ Other Option: R= Reversed Type

Lead Free Process

RoHS compliant

4					DATE	UNIT: mm / inch		TITLE: D-SUB 15 FEMALE HIGH DENSITY CONNECTOR DIP TYPE(REVERSED)	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD						
3				DRAWN BY:	Sandy	4/23-19'	TOLERANCE UNLESS OTHERWISE SPECIFIED								
2				ENGINEER:	Sun	4/24-19'	.XX ±0.25 / .010	.X' ± 2"	MATERIAL:	DRAWING NO. CD1301SA PART NO. CD1315S*100-R					
1				CHECKED BY:	Eisley	4/26-19'	.XXX ±0.13 / .005								
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	4/26-19'			FINISH:	SCALE	2 / 1	SHEET	1	OF	1