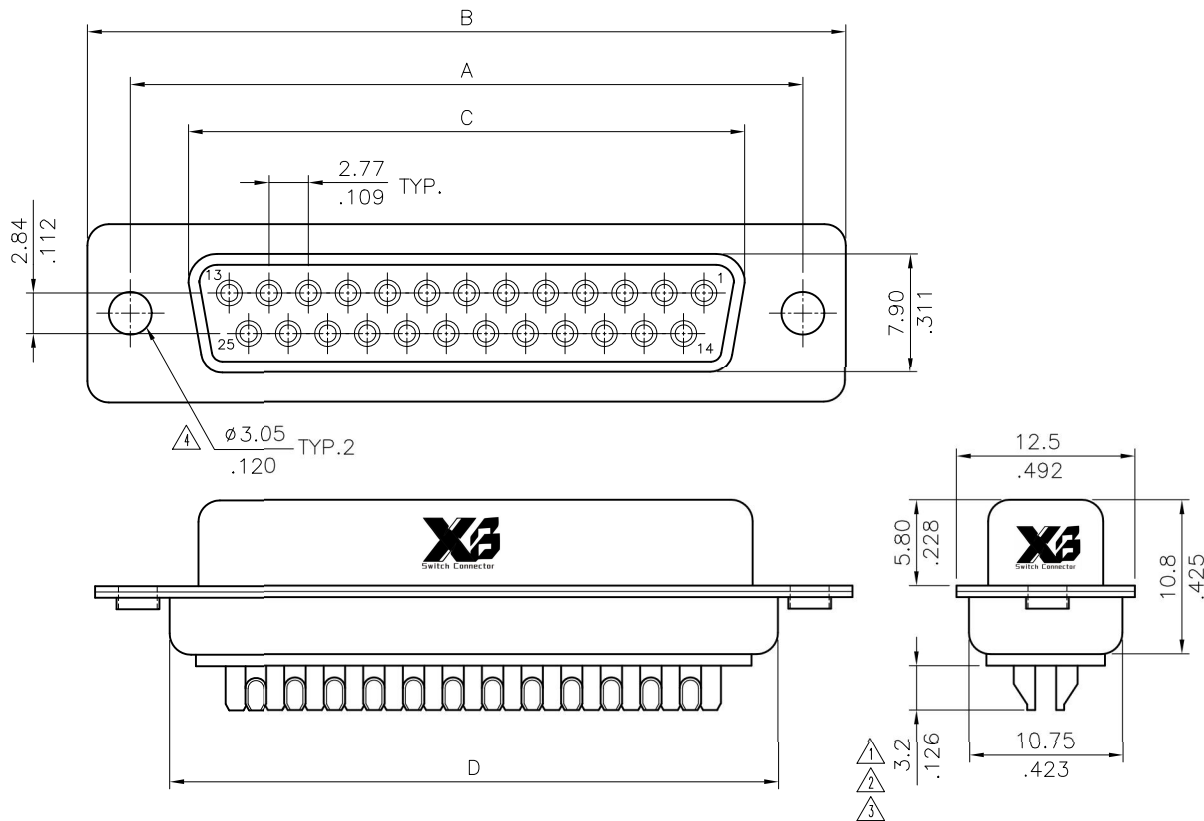


Material:

Insulator: Glass filled polyester UL 94V-0

Contact: Brass

△ Shell: Steel, Nickel plated as standard



Circuits	Dimension			
	A	B	C	D
9	25.00(.984)	30.8(1.213)	16.30(.642)	19.20(.756)
15	33.32(1.312)	39.2(1.543)	24.60(.969)	27.70(1.091)
25	47.04(1.852)	53.1(2.091)	38.30(1.508)	41.10(1.618)
37	63.50(2.500)	69.4(2.732)	54.80(2.157)	57.30(2.256)

Ordering Code

CD51 25 S 2 1 00
① ② ③ ④ ⑤ ⑥

① Series No.

② No. of Circuits: 9,15,25,37

③ Contact type: S= Receptacle(Female)

④ Plating option:

2= Gold flash plated over Nickel

A= Selective Gold flash plated over Nickel

⑤ Color: 1= Black, 7= Blue, 0= White





⑥ Other Option:

00 = With $\phi 3.05$ mm holes on shell(Standard)

A0 = Riveted #4-40 UNC close nuts on front shell

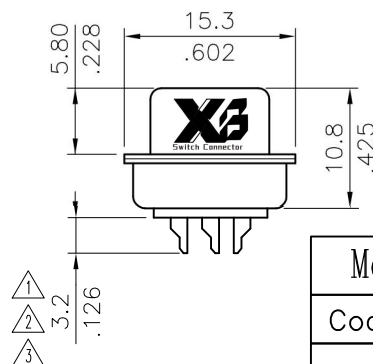
B0 = Riveted #4-40 UNC open nuts on front shell

C0 = Riveted #4-40 UNC open nuts on rear shell

Mounting Style		Lead Free Process		RoHS Compliant			
Code	00	Code	A0	Code	B0	Code	C0
		DIM. L= 5.8mm 		DIM. L= 4.0mm 		DIM. L= 4.0mm 	

△5	Ken	3/13-18'	ECRT117079/ECNT118047			DATE	UNIT: mm / inch		TITLE: D-SUB FEMALE SOLDER CUP SERIES	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
△4	Sandy	3/25-10'	ECN10079	DRAWN BY:	Ken	3/15-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
△3	Sun	9/30-09'	ECR09128-0/ECN09488	ENGINEER:	Sun	3/16-18'	.X ±0.30/.012	X' ± 1'	MATERIAL:	DRAWING NO.	CD5102SG	PART NO.	CD51**S****
△2	Sun	9/18-06	ECN06329	CHECKED BY:	Eisley	3/23-18'	.XX ±0.20/.008	.X' ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/23-18'	.XXX ±0.10/.004	.XX' ±	FINISH:	SCALE	2 / 1	SHEET	1 OF 1

△5 Shell: Steel, Nickel plated as standard



CD51	50	S	2	1	00
①	②	③	④	⑤	⑥

- ① Series No.
- ② No. of Circuits:
- ③ Contact type: S= Receptacle(Female)
- ④ Plating option:
2= Gold flash plated over Nickel
A= Selective Gold flash plated over Nickel
- ⑤ Color: 1= Black, 7= Blue, 0= White
- ⑥ Other Option:
00 = With $\varnothing 3.05\text{mm}$ holes on shell(Standard)
A0 = Riveted #4-40 UNC close nuts on front shell
B0 = Riveted #4-40 UNC open nuts on front shell
C0 = Riveted #4-40 UNC open nuts on rear shell

5	Ken	3/15-18'	ECRT117079/ECNT118047			DATE	UNIT: mm / inch		TITLE: D-SUB FEMALE 50P SOLDER CUP TYPE	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD				
4	Sandy	3/25-10'	ECN10079	DRAWN BY:	Ken	3/15-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:	DRAWING NO.	CD5104SH	PART NO.
3	Sun	9/30-09'	ECR09128-0/ECN09488	ENGINEER:	Sun	3/16-18'	.X ±0.3/.012	X' ± 1"	FINISH:					
2	Sun	9/18-06	ECN06329	CHECKED BY:	Eisley	3/23-18'	.XX ±0.2/.008	.X' ±			SCALE	2 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/23-18'	.XXX ±0.1/.004	.XX' ±						