




Material:

Insulator: Glass filled Polyester UL 94V-0

Color Black or White

Contact: Brass

Shell: Steel, Tin plated as standard

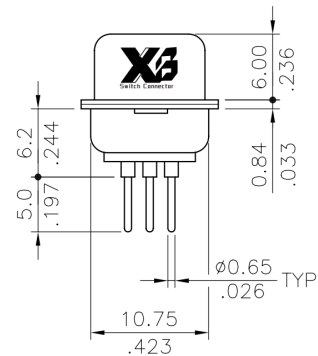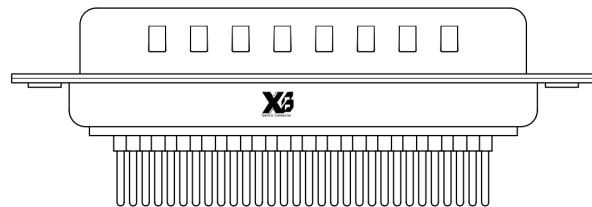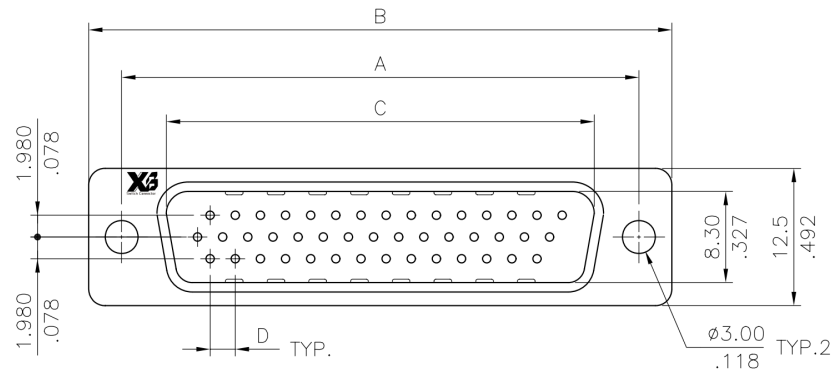

Circuits	Dimension			
	A	B	C	D
15	25.00(.984)	30.8(1.213)	16.92(.666)	2.290(.090)
26	33.32(1.312)	39.2(1.543)	25.25(.994)	2.290(.090)
44	47.04(1.852)	53.1(2.091)	38.96(1.534)	2.290(.090)
62	63.50(2.500)	69.4(2.732)	55.42(2.182)	2.410(.095)

Ordering Code :

CD76 44 P * * 00
① ② ③ ④ ⑤ ⑥

1. Series No.
2. Contacts: 15,26,44,62
3. Contact type : P=plug , S=Receptacle
4. Contact Plating :
 - 2 = Gold flash plated over 1.27 μ m(50 μ) Nickel
 - 3 = 0.38 μ m(15 μ) Gold plated over 1.27 μ m(50 μ) Nickel
 - 4 = 0.76 μ m(30 μ) Gold plated over 1.27 μ m(50 μ) Nickel
 - 5 = 1.27 μ m(50 μ) Gold plated over 1.27 μ m(50 μ) Nickel
5. Insulator Color :
 - 1=Black , 0=White
6. Other option :
 - 00 = With ϕ 3.00mm holes on shell

4						DATE	UNIT: mm / inch		TITLE: HIGH-DENSITY D-SUB TOP ENTRY MALE CONNECTOR (MACHINED CONTACT)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD
3				DRAWN BY:	David	8/31 00'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2				ENGINEER:	David	8/31 00'	.X ±0.30/.012 X' ± 1'		MATERIAL:	DRAWING NO. CD7601SA PART NO. CD76**P***00
1				CHECKED BY:	Alex	8/31 00'	.XX ±0.20/.008 .X' ±			
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	8/31 00'	.XXX ±0.10/.004 .XX' ±		FINISH:	SCALE 2 / 1 SHEET 1 OF 1