




Notes:

* Insulator: Glass filled Polyester UL 94V-0
Color Black or White

* Contact: Brass

△2 * Shell: Steel, Nickel plated as standard

* For Lead Free Wave Flow Process
Recommended P.C. Board Layout see drawing No. CD7249S*

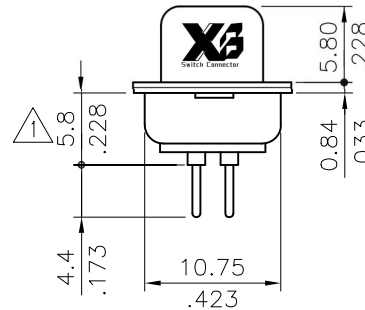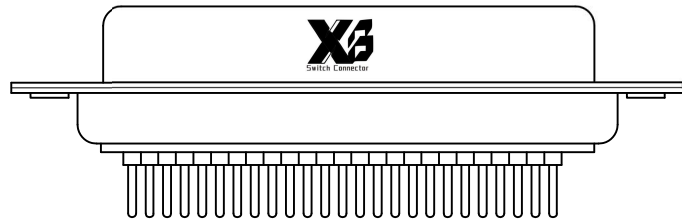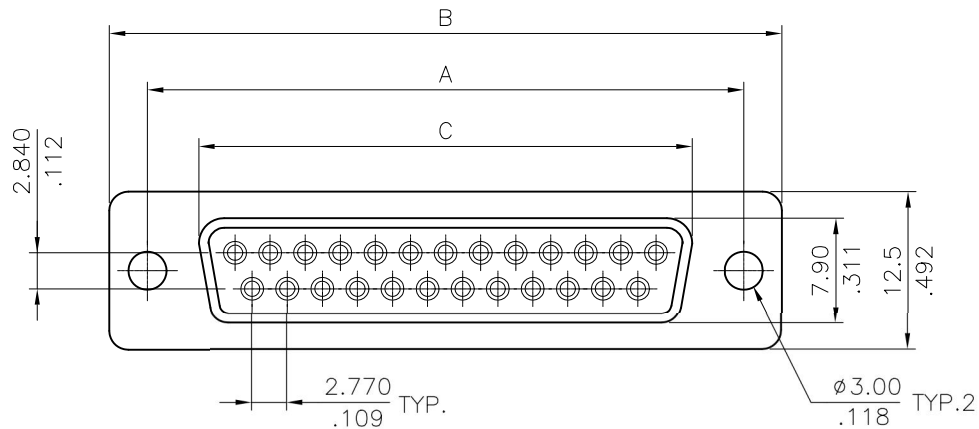

Circuits	Dimension		
	A	B	C
9	25.00(.984)	30.8(1.213)	16.30(.642)
15	33.32(1.312)	39.2(1.543)	24.60(.969)
25	47.04(1.852)	53.1(2.091)	38.30(1.508)
37	63.50(2.500)	69.4(2.732)	54.80(2.157)

Ordering Code :

CD72 25 S * * 00
① ② ③ ④ ⑤ ⑥

- Series No.
- Contacts: 9,15,25,37
- Contact type : S=Receptacle
- Contact Plating :
 - 2 = Gold flash plated over 1.27μm(50μ") Nickel (Standard)
 - 3 = 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
 - 4 = 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
 - 5 = 1.27μm(50μ") Gold plated over 1.27μm(50μ") Nickel
- Insulator Color :
 - 1=Black , 0=White
- Other option :
 - 00 = With ø3.00mm holes on shell

Lead Free Process

RoHS Compliant

△4					DATE	UNIT: mm / inch	TITLE: D-SUB TOP ENTRY FEMALE CONNECTOR (MACHINED CONTACTOR)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
△3				DRAWN BY: Karen	2/01-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
△2	Karen	1/31-18'	ECNT117262/ECRT117074	ENGINEER: Sun	2/02-18'	.X ±0.30/.012	MATERIAL:	DRAWING NO. CD7202SE	PART NO. CD72**S**00	SCALE 2 / 1	SHEET 1 OF 1
△1	SUN	12/03/03'	ECN03437/ECR03056-0	CHECKED BY: Eisley	2/05-18'	.XX ±0.20/.008	FINISH:				
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	2/05-18'	.XXX ±0.10/.004					


Notes:

* Insulator: Glass filled Polyester UL 94V-0
Color Black or White

* Contact: Brass

△2 * Shell: Steel, Nickel plated as standard

* For Lead Free Wave Flow Process
Recommended P.C. Board Layout see drawing No. CD7249S*

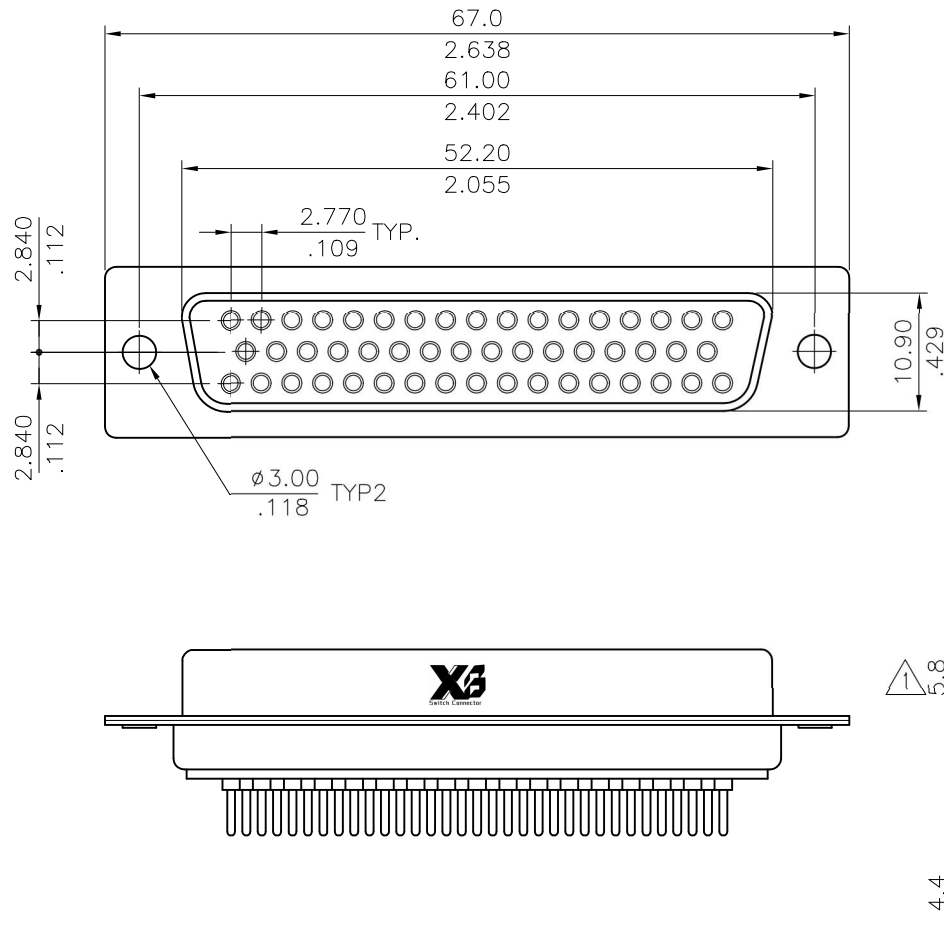

Ordering Code :

CD72 50 S * * 00
① ② ③ ④ ⑤ ⑥

1. Series No.
2. Contacts: 50
3. Contact type : S=Receptacle
4. Contact Plating :
 - 2 = Gold flash plated over 1.27 μ m(50 μ) Nickel (Standard)
 - 3 = 0.38 μ m(15 μ) Gold plated over 1.27 μ m(50 μ) Nickel
 - 4 = 0.76 μ m(30 μ) Gold plated over 1.27 μ m(50 μ) Nickel
 - 5 = 1.27 μ m(50 μ) Gold plated over 1.27 μ m(50 μ) Nickel
5. Insulator Color :
 - 1=Black , 0=White
6. Other option :
 - 00 = With $\phi 3.00$ mm holes on shell

Lead Free Process

RoHS Compliant

△4					DATE	UNIT: mm / inch	TITLE: D-SUB TOP ENTRY FEMALE CONNECTOR (MACHINED CONTACTOR)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
△3				DRAWN BY: Karen	2/01-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
△2	Karen	1/31-18'	ECNT117262/ECRT117074	ENGINEER: Sun	2/02-18'	.X ±0.30/.012 X' ± 1'	MATERIAL:	DRAWING NO.	CD7204SE	PART NO.	CD7250S**00
△1	SUN	12/03/03'	ECN03437/ECR03056-0	CHECKED BY: Eisley	2/05-18'	.XX ±0.20/.008 X' ±	FINISH:	SCALE	2 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	2/05-18'	.XXX ±0.10/.004 X' ±					